
SAMSUNG

PROJECTION TV RECEIVER

Chassis : P54A(REV. 3)
Model : HCM653W HCM553W HCM5525W

SERVICE Manual

PROJECTION TV RECEIVER

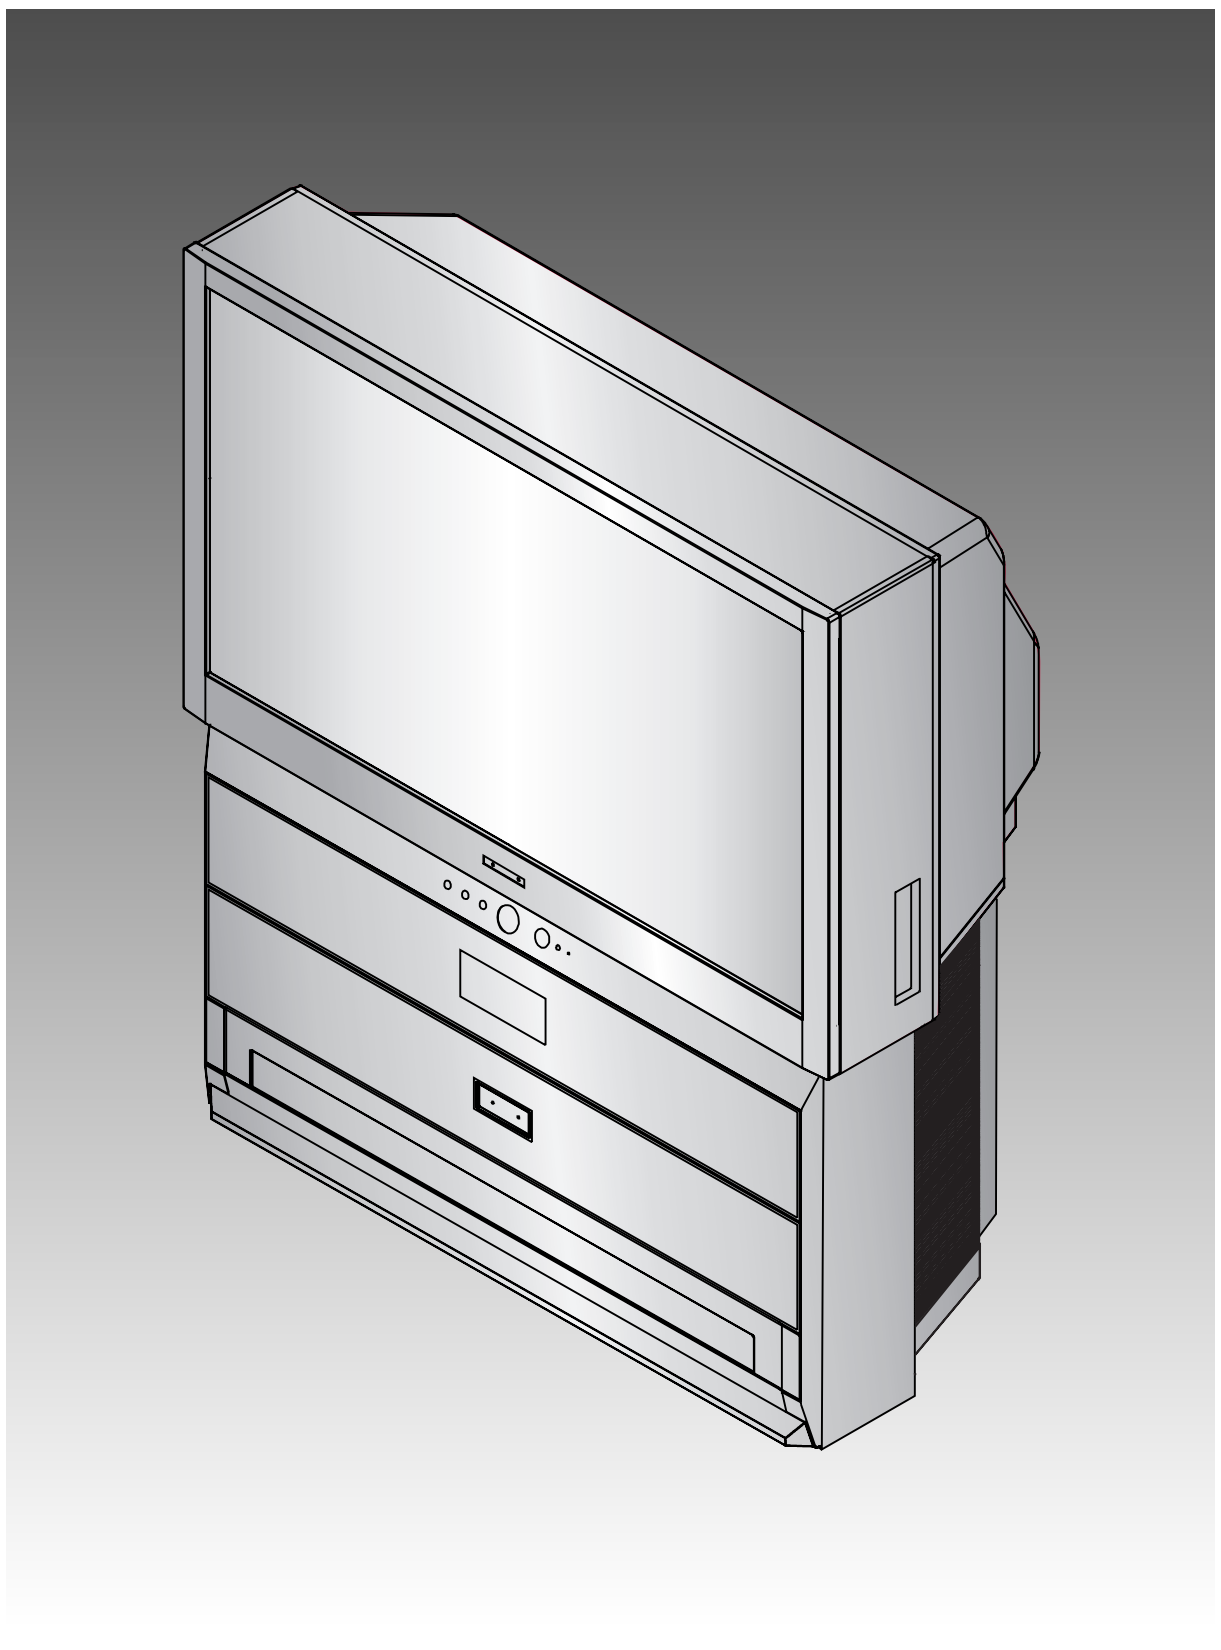

CONTENTS

SAMSUNG

ELECTRONICS

AA82-00053A

1. Precautions

Follow these safety, servicing and ESD precautions to prevent damage and protect against potential hazards such as electrical shock and X-rays.

1-1 Safety Precautions

1. Be sure that all of the built-in protective devices are replaced. Restore any missing protective shields.

2. When reinstalling the chassis and its assemblies, be sure to restore all protective devices, including: nonmetallic control knobs and compartment covers.

3. Make sure that there are no cabinet openings through which people—particularly children—might insert fingers and contact dangerous voltages. Such openings include the spacing between the picture tube and the cabinet mask, excessively wide cabinet ventilation slots, and improperly fitted back covers.

   If the measured resistance is less than 1.0 megohm or greater than 5.2 megohms, an abnormality exists that must be corrected before the unit is returned to the customer.

4. Leakage Current Hot Check (Figure 1-1): Warning: Do not use an isolation transformer during this test. Use a leakage-current tester or a metering system that complies with American National Standards Institute (ANIS C101.1, Leakage Current for Appliances), and Underwriters Laboratories (UL Publication UL1410, 59.7).

5. With the unit completely reassembled, plug the AC line cord directly into the power outlet. With the unit's AC switch first in the ON position and then OFF, measure the current between a known earth ground (metal water pipe, conduit, etc.) and all exposed metal parts, including: antennas, handle brackets, metal cabinets, screwheads and control shafts. The current measured should not exceed 0.5 milliamp. Reverse the power-plug prongs in the AC outlet and repeat the test.

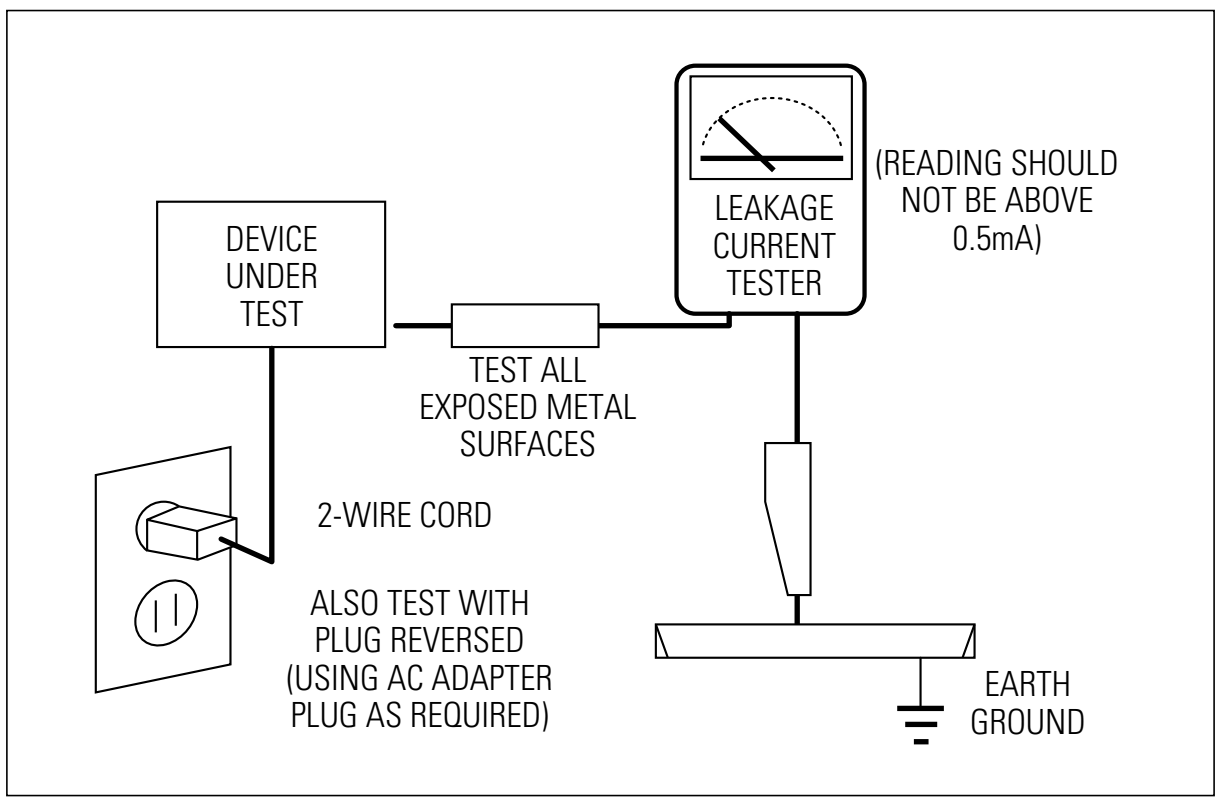


Fig. 1-1 AC Leakage Test

6. Antenna Cold Check:
   With the unit's AC plug disconnected from the AC source, connect an electrical jumper across the two AC prongs. Connect one lead of the ohmmeter to an AC prong. Connect the other lead to the coaxial connector.

7. X-ray Limits:
   The picture tube is especially designed to prohibit X-ray emissions. To ensure continued X-ray protection, replace the picture tube only with one that is the same type as the original. Carefully reinstall the picture tube shields and mounting hardware; these also provide X-ray protection.

8. High Voltage Limits:
   High voltage must be measured each time servicing is done on the B+, horizontal deflection or high voltage circuits. Correct operation of the X-ray protection circuits must be reconfirmed whenever they are serviced. (X-ray protection circuits also may be called "horizontal disable" or "hold-down".)

   Heed the high voltage limits. These include the X–ray Protection Specifications Label, and the Product Safety and X-ray Warning Note on the service data schematic.

1-1 Safety Precautions (Continued)

9. High voltage is maintained within specified limits by close-tolerance, safety-related components and adjustments. If the high voltage exceeds the specified limits, check each of the special components.

10. Design Alteration Warning:
Never alter or add to the mechanical or electrical design of this unit. Example: Do not add auxiliary audio or video connectors. Such alterations might create a safety hazard. Also, any design changes or additions will void the manufacturer's warranty.

11. Hot Chassis Warning:
Some TV receiver chassis are electrically connected directly to one conductor of the AC power cord. If an isolation transformer is not used, these units may be safely serviced only if the AC power plug is inserted so that the chassis is connected to the ground side of the AC source.

    To confirm that the AC power plug is inserted correctly, do the following: Using an AC voltmeter, measure the voltage between the chassis and a known earth ground. If the reading is greater than 1.0V, remove the AC power plug, reverse its polarity and reinsert. Re-measure the voltage between the chassis and ground.

12. Some TV chassis are designed to operate with 85 volts AC between chassis and ground, regardless of the AC plug polarity. These units can be safely serviced only if an isolation transformer inserted between the receiver and the power source.

13. Some TV chassis have a secondary ground system in addition to the main chassis ground. This secondary ground system is not isolated from the AC power line. The two ground systems are electrically separated by insulating material that must not be defeated or altered.

14. Components, parts and wiring that appear to have overheated or that are otherwise damaged should be replaced with parts that meet the original specifications. Always determine the cause of damage or overheating, and correct any potential hazards.

15. Observe the original lead dress, especially near the following areas: Antenna wiring, sharp edges, and especially the AC and high voltage power supplies. Always inspect for pinched, out-of-place, or frayed wiring. Do not change the spacing between components and the printed circuit board. Check the AC power cord for damage. Make sure that leads and components do not touch thermally hot parts.

16. Picture Tube Implosion Warning:
The picture tube in this receiver employs "integral implosion" protection. To ensure continued implosion protection, make sure that the replacement picture tube is the same as the original.

17. Do not remove, install or handle the picture tube without first putting on shatterproof goggles equipped with side shields. Never handle the picture tube by its neck. Some "in-line" picture tubes are equipped with a permanently attached deflection yoke; do not try to remove such "permanently attached" yokes from the picture tube.

18. Product Safety Notice:
Some electrical and mechanical parts have special safety-related characteristics which might not be obvious from visual inspection. These safety features and the protection they give might be lost if the replacement component differs from the original—even if the replacement is rated for higher voltage, wattage, etc.

    Components that are critical for safety are indicated in the circuit diagram by shading, (⚠) or (⚠).
    Use replacement components that have the same ratings, especially for flame resistance and dielectric strength specifications.
    A replacement part that does not have the same safety characteristics as the original might create shock, fire or other hazards.

1-2 Servicing Precautions

Warning 1 : First read the "Safety Precautions" section of this manual. If some unforeseen circumstance creates a conflict between the servicing and safety precautions, always follow the safety precautions.
Warning 2 : An electrolytic capacitor installed with the wrong polarity might explode.

1. Servicing precautions are printed on the cabinet. Follow them.

2. Always unplug the unit's AC power cord from the AC power source before attempting to: (a) Remove or reinstall any component or assembly, (b) Disconnect an electrical plug or connector, (c) Connect a test component in parallel with an electrolytic capacitor.

3. Some components are raised above the printed circuit board for safety. An insulation tube or tape is sometimes used. The internal wiring is sometimes clamped to prevent contact with thermally hot components. Reinstall all such elements to their original position.

4. After servicing, always check that the screws, components and wiring have been correctly reinstalled. Make sure that the portion around the serviced part has not been damaged.

5. Check the insulation between the blades of the AC plug and accessible conductive parts (examples: metal panels, input terminals and earphone jacks).

"CAUTION : Double-pole/neutral fusing"

6. Insulation Checking Procedure: Disconnect the power cord from the AC source and turn the power switch ON. Connect an insulation resistance meter (500V) to the blades of the AC plug.

   The insulation resistance between each blade of the AC plug and accessible conductive parts (see above) should be greater than 1 megohm.

7. Never defeat any of the B+ voltage interlocks. Do not apply AC power to the unit (or any of its assemblies) unless all solid-state heat sinks are correctly installed.

8. Always connect a test instrument's ground lead to the instrument chassis ground before connecting the positive lead; always remove the instrument's ground lead last.

9. When some parts inside the optical engine (except lamp) are damaged, replace the whole optical engine.

1-3 Precautions for Electrostatically Sensitive Devices (ESDs)

1. Some semiconductor ("solid state") devices are easily damaged by static electricity. Such components are called Electrostatically Sensitive Devices (ESDs); examples include integrated circuits and some field-effect transistors. The following techniques will reduce the occurrence of component damage caused by static electricity.

2. Immediately before handling any semicon ductor components or assemblies, drain the electrostatic charge from your body by touching a known earth ground. Alternatively, wear a discharging wrist-strap device. (Be sure to remove it prior to applying power— this is an electric shock precaution.)

3. After removing an ESD-equipped assembly, place it on a conductive surface such as aluminum foil to prevent accumulation of electrostatic charge.

4. Do not use freon-propelled chemicals. These can generate electrical charges that damage ESDs.

5. Use only a grounded-tip soldering iron when soldering or unsoldering ESDs.

6. Use only an anti-static solder removal device. Many solder removal devices are not rated as "anti-static"; these can accumulate sufficient electrical charge to damage ESDs.

7. Do not remove a replacement ESD from its protective package until you are ready to install it. Most replacement ESDs are packaged with leads that are electrically shorted together by conductive foam, aluminum foil or other conductive materials.

8. Immediately before removing the protective material from the leads of a replacement ESD, touch the protective material to the chassis or circuit assembly into which the device will be installed.

9. Minimize body motions when handling unpackaged replacement ESDs. Motions such as brushing clothes together, or lifting a foot from a carpeted floor can generate enough static electricity to damage an ESD.

CAUTION

These servicing instructions are for use by qualified service personnel only.
To reduce the risk of electric shock do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so.

2. Reference Information

2-1 Tables of Abbreviations and Acronyms

Table 2-1 Abbreviations

A	Ampere	MV	Megavolt
Ah	Ampere-hour	MW	Megawatt
Å	Angstrom	MΩ	Megohm
dB	Decibel	m	Meter
dBm	Decibel Referenced to One Milliwatt	μA	Microampere
		μF	Microfarad
°C	Degree Celsius	μH	Microhenry
°F	Degree Fahrenheit	μm	Micrometer
°K	degree Kelvin	μs	Microsecond
F	Farad	μW	Microwatt
G	Gauss	mA	Milliampere
GHz	Gigahertz	mg	Milligram
g	Gram	mH	Millihenry
H	Henry	ml	Milliliter
Hz	Hertz	mm	Millimeter
h	Hour	ms	Millisecond
ips	Inches Per Second	mV	Millivolt
kWh	Kilowatt-hour	nF	Nanofarad
kg	Kilogram	Ω	Ohm
kHz	Kilohertz	pF	Picofarad
kΩ	Kilohm	lb	Pound
km	Kilometer	rpm	Revolutions Per Minute
km/h	Kilometer Per Hour	rps	Revolutions Per Second
kV	Kilovolt	s	Second (Time)
kVA	Kilovolt-ampere	V	Volt
kW	Kilowatt	VA	Volt-ampere
l	Liter	W	Watt
MHz	Megahertz	Wh	Watt-hour

Table 2-2 Table of Acronyms

Acronym	Meaning
ABL	Automatic Brightness Limiter
AC	Alternating Current
ACC	Automatic Chroma Control
AF	Audio Frequency
AFC	Automatic Frequency Control
AFT	Automatic Fine Tuning
AGC	Automatic Gain Control
AM	Amplitude Modulation
ANSI	American National Standards Institute
APC	Automatic Phase Control
APC	Automatic Picture Control
A/V	Audio-Video
AVC	Automatic Volume Control
BAL	Balance
BPF	Bandpass Filter
B-Y	Blue-Y
CATV	Community Antenna Television (Cable TV)
CB	Citizens Band
CCD	Charge Coupled Device
CCTV	Closed Circuit Television
Ch	Channel
CRT	Cathode Ray Tube
CW	Continuous Wave
DC	Direct Current
DVM	Digital Volt Meter
EIA	Electronics Industries Association
ESD	Electrostatic Discharge
ESD	Electrostatically Sensitive Device
FBP	Feedback Pulse
FBT	Flyback Transformer
FF	Flip-Flop
FM	Frequency Modulation
FS	Fail Safe
GND	Ground
G-Y	Green-Y
H	High
HF	High-Frequency
HI-FI	High Fidelity
IC	Inductance-Capacitance
IC	Integrated Circuit
IF	Intermediate Frequency
I/O	Input/output
L	Left
L	Low
LED	Light Emitting Diode
LF	Low Frequency
MOSFET	Metal-Oxide-Semiconductor-Field-Effect-Tr
MTS	Multi-channel Television Sound
NAB	National Association of Broadcasters
NEC	National Electric Code
NTSC	National Television Systems Committee
OSD	On Screen Display
PCB	Printed Circuit Board
PLL	Phase-Locked Loop
PWM	Pulse Width Modulation
QIF	Quadrature Intermediate Frequency
R	Right
RC	Resistor & Capacitor
RF	Radio Frequency
R-Y	Red-Y
SAP	Second Audio Program
SAW	Surface Acoustic Wave(Filter)
SIF	Sound Intermediate Frequency
SMPS	Switching Mode Power Supply
S/N	Signal/Noise
SW	Switch
TP	Test Point
TTL	Transistor Transistor Logic
TV	Television
UHF	Ultra High Frequency
UL	Underwriters Laboratories
UV	Ultraviolet
VCD	Variable-Capacitance Diode
VCO	Voltage Controlled Oscillator
VCXO	Voltage Controlled Crystal Oscillator
VHF	Very High Frequency
VIF	Video Intermediate Frequency
VR	Variable Resistor
VTR	Video Tape Recorder
VTVM	Vacuum Tube Voltmeter
TR	Transistor

2-2 IC Line Up


2-2-1 Progressive

Table 2 - 3 IC Line - Up

No.	Block Name	IC Location	IC Name
1	MAIN	IC655	TDA7265
2	SUB	ICS801	TNY253P
		IC301	LA7845
		IC471	TL494CN
		ICZ103,104	STK392-040
		IC431	MC4558C
3	A/V-Terminal	IC703	PCF8574P
		ICP706	PCF8574P(Option)
		IC701,702	TDA6920X
		IC705	TC4052BP
		ICD02	MC14528B
		ICD01,03	EL4583C
4	Micom	IC901	Z9037116PSC
		IC902	24C16
5	Caption	ICC01	Z86129
		ICC02,03	NJM2248D
6	Double Window(D/W)	IC06	SDA9361
		IC07	CXA2101AQ
		IC01	VPC3230D-B2
		IC02	SDP9400
		IC03	SDS9280
		PIC01	VPC3230D-B2
		PIC02	MS81V04160
*6-1	PIP	*ICP701	SDA9488X
		*IC04	CIP3250A
7	3D-Comb	IC01	UPD64082GF
		IC02	416C1204

Table 2 - 3 IC Line - Up (Continued)			
No.	Block Name	IC Location	IC Name
8	Convergence (SDC11)	IC01	SDC11
		IC06	TSC87251 20-OTP
		IC04	7042
		IC05	24C16
		IC08	EL2250CS
		IC09	74HC4052
		IC10,11,12	TL072
		IC13	TL324
		IC14,15,16	7S04
		IC17	TLC2932IPWLE
*8-1	Convergence (SDC12)	IC04,05,06	NC7S04P5X
		IC08	74HC4052
		IC13	NC7SB3157P6X
		IC05	24C16
		IC12	KA324D
		IC09,10,11	TL072C
		IC07	EL2250CS
		IC03	KIA7042AF
		IC02	KA78M33D
		IC17	TLC2932IPWLE
9	Sound	ICD601	MSP3452G-A1
		*ICD601	MSP3450G-B6
		ICD602,603	TL062
10	CRT	IC501,531,561	TDA6111Q
11	POWER	IC801S	STRF6656
		IC802	SVD001(OPTION)
		IC804	SE110N
12	REPLAY-MODULE (OPTION)	DU801	EPC1PC8
		DU803,804,805,806	K4S561632C-TL75
		DU808	MIC39150
		DU800	EP1K30FC256-3

2-3 MICOM IIC BUS LINE -UP

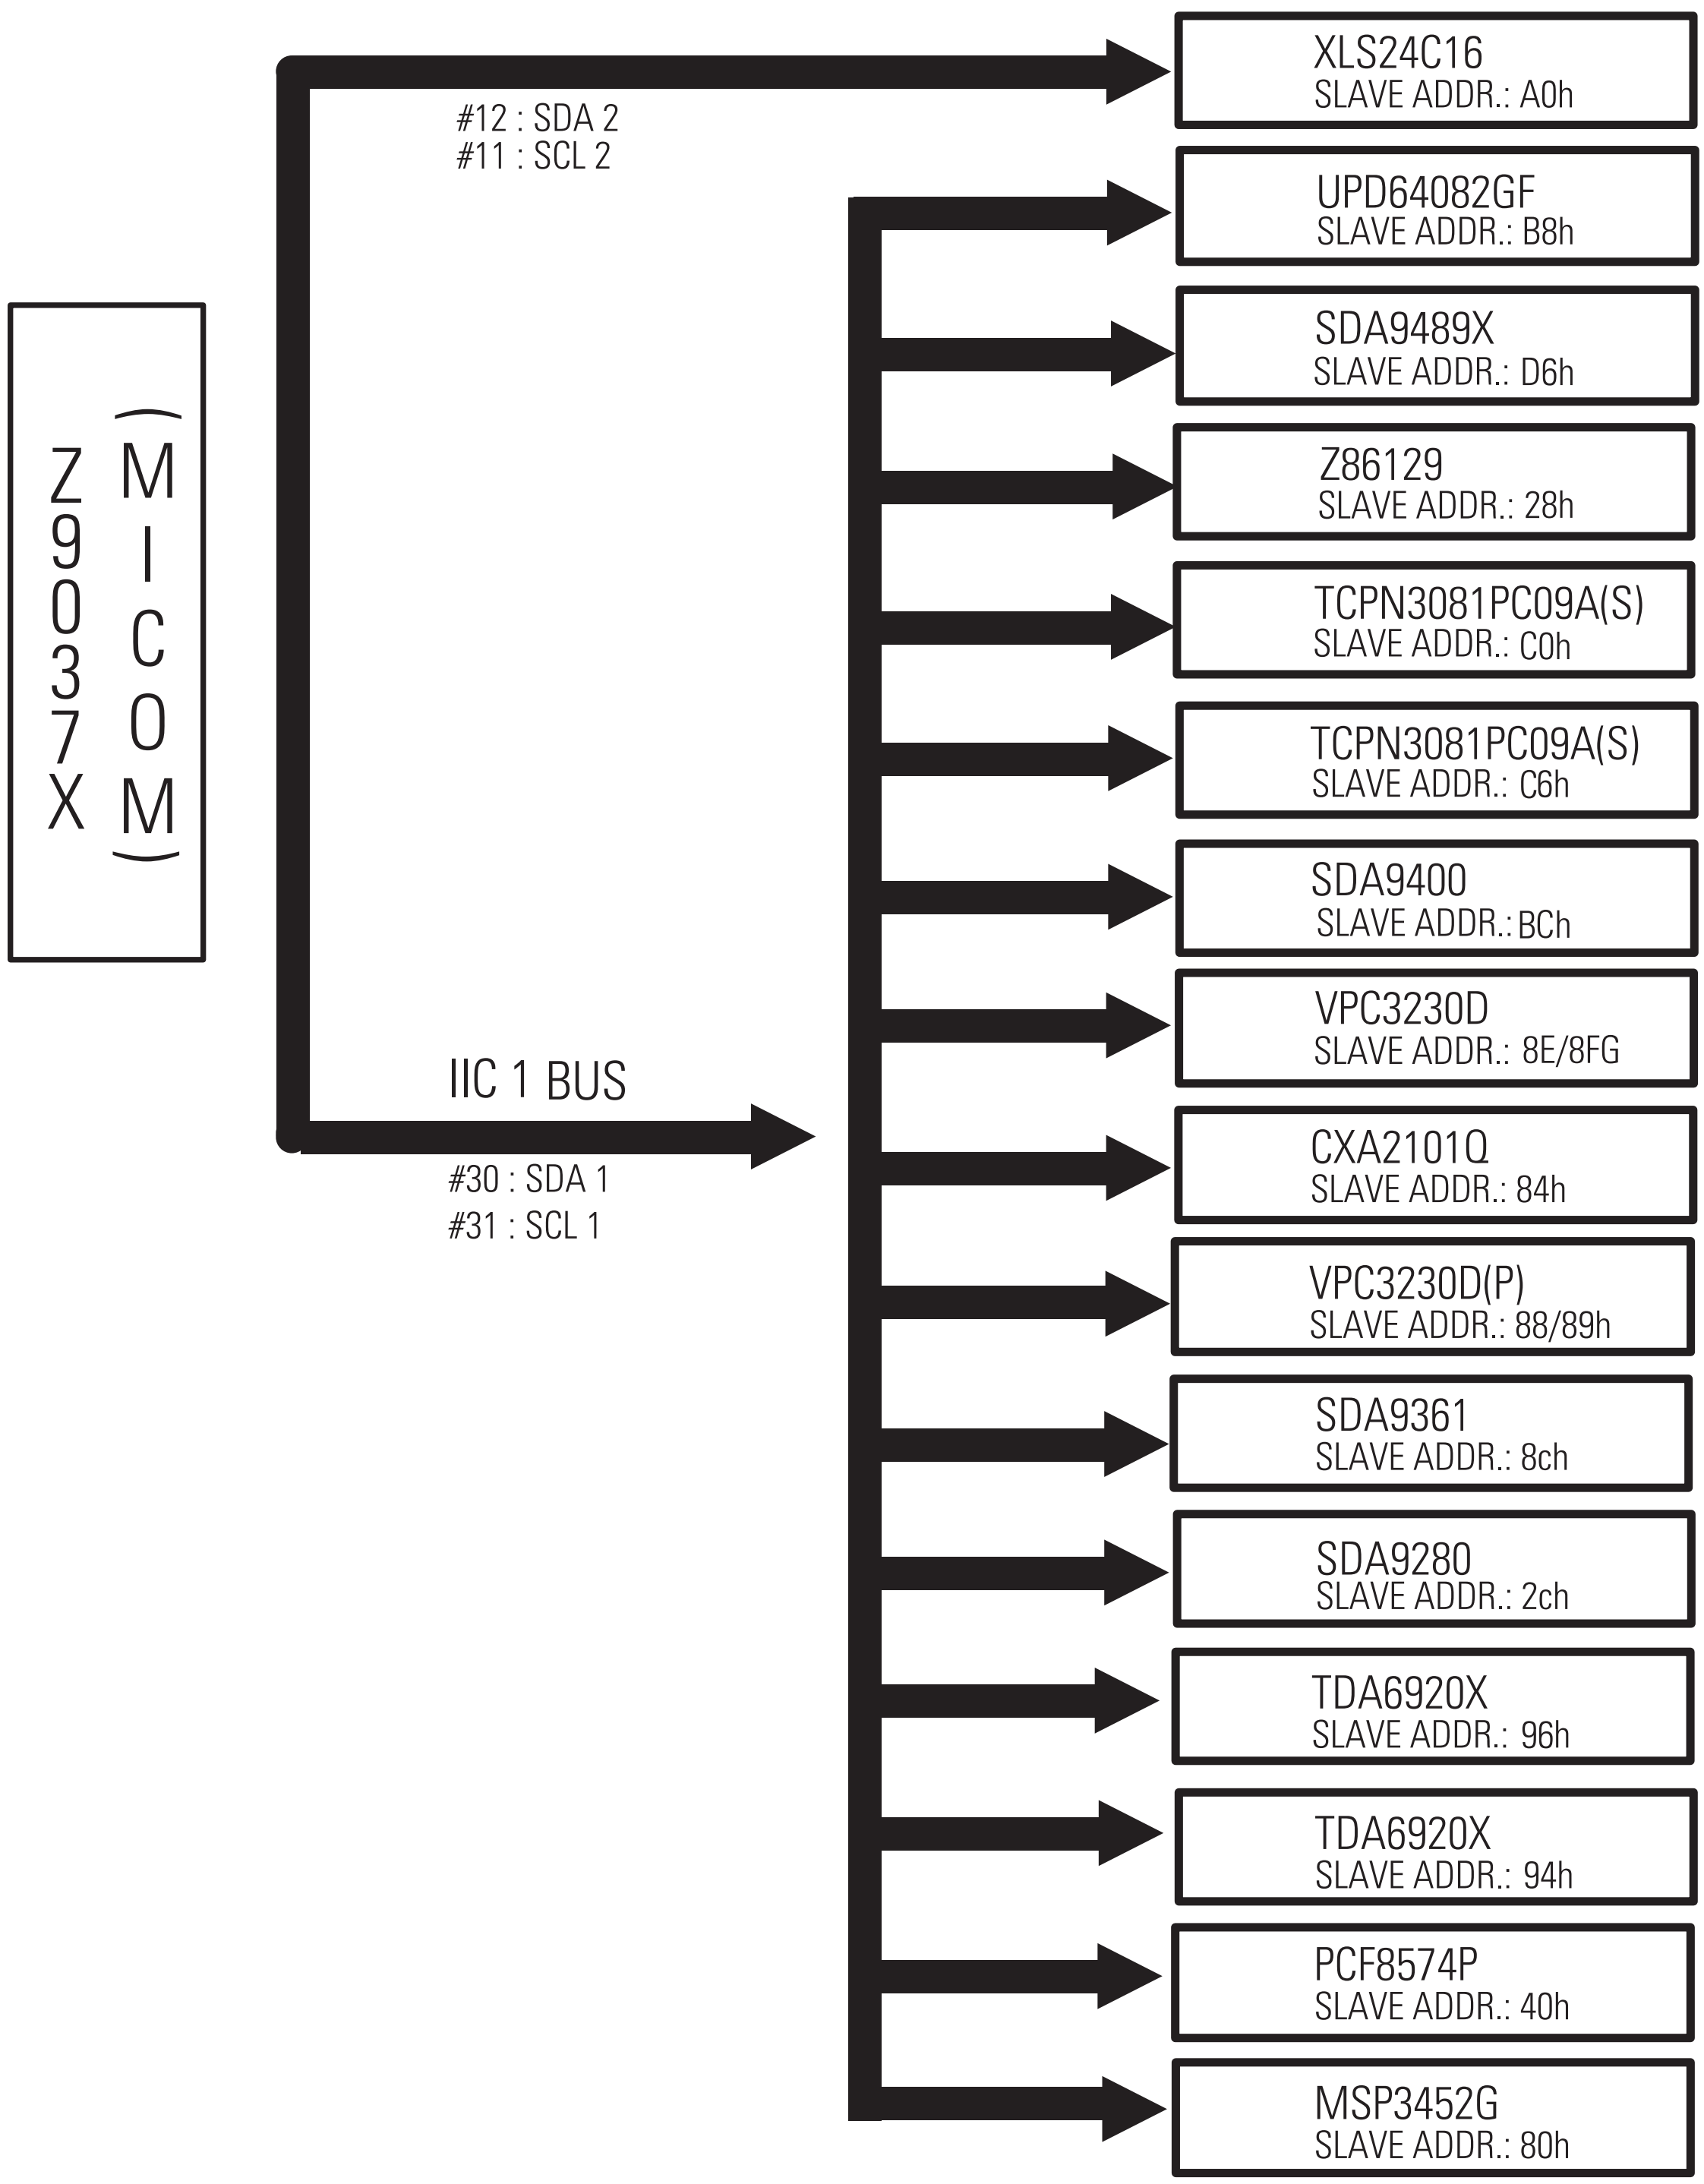

MENO

3. Specifications

Broadcasting System	NTSC
Scanning System	Progressive Scanning
Tuning Range	VHF : CH2 ~ CH13 UHF : CH14 ~ CH69 Cable : CH1, CH14 ~ 125
Antenna Impedance	75 ohm Unbalanced
Intermediate Frequency	Video : 45.75 MHz Sound : 42.25 MHz Chrominance Subcarrier : 42.17 MHz
Sound Output	STD : 10W FULL MAX : 15W
Rated Voltage	120V / 60 Hz
W/B Coordinates	Hx : 290 Hy : 278 Y : 8.0 Lx : 290 Ly : 278 Y : 0.2
High Voltage	29KV
FUSE	250V/6.3A CODE NO : 3601-000300
Power Consumption	230W

MENO

4. Alignment and Adjustments

4-1 When entering the service mode:

1. Turn on the TV, and then select “STANDARD”on the picture adjustment mode.

2. Turn off the TV (STAND-BY).

3. Enter the service mode by pressing the remote control keys in the following sequence :
   MUTE 1→8→2→Power On

Note : If necessary, re-do steps 1~3.

Initial display when the service mode is switched.

1. When a RF signal is received

SERVICE MODE NORMAL

GEOMETRICS
PICTURE
SOUND
PIP
OPTION
READ
RESET

2. When a DTV signal is received

SERVICE MODE 1080i/480P

GEOMETRICS
PICTURE
SOUND
PIP
OPTION
READ
RESET

3. Service Mode Control Keys

MAIN MENU	MENU DISPLAY
CH UP/DOWN	Select item by moving cursor
VOL UP/DOWN	Decrease or increase the adjustment values

< PRECAUTIONS >

1. When EEPROM IC (IC902) is replaced, first connect the power cord and wait for about 4~5 seconds.

2. After replacing EEPROM IC (IC902), enter the Service mode. Next, enter the standard data or the previous EEPROM IC data before replacement. And then check and adjust any items related to Geometric, Picture, Option.

4-2 Factory Data

4-2-1 NORMAL

GEOMETRIC

Item	FUNCTION	RANGE	INITIAL DATA	Performance of adjustment	EEP-ROM COPY DATA		
					54″	62″	47″/55″/65″
VS	V-Shift	0~255	110	Variable	100	100	100
VA	V-Size	0~255	120	Variable	120	120	120
VL	V-Line	0~255	120	x	120	120	120
VSC	V-S-CORR	0~255	128	x	128	128	128
VE	V-EHT	0~255	0	x	0	0	0
HA	H-Size	0~255	84	Variable	80	80	80
PPH	PIN-PHS	0~255	128	x	128	128	128
PAM	PIN-AMP	0~255	70	x	70	70	70
UPC	UP-CORR	0~255	128	x	128	128	128
LOC	LO-CORR	0~255	128	x	128	128	128
HEH	H-EHT	0~255	0	x	0	0	0
HS	H-Shift	0~127	90	Fix	90	90	90
VAN	V-Angle	0~255	128	x	128	128	128
VBO	V-Bow	0~255	128	x	128	128	128
HSP	H-Sync-PH	0~255	138	x	138	138	138
OFS	Offset	0~1	0	x	0	0	0
VSO	VS-Offset	0~125	57	Variable	57	0	0
VAO	VA-Offset	0~125	70	Variable	70	40	40
VLO	VL-Offset	0~125	0	Variable	0	0	0
Set after changing the option for 1080i-mode factory-scan (OFS 0->1) *Only DTV 1080i Mode							

PICTURE

Item	FUNCTION	RANGE	INITIAL DATA	Performance of adjustment	EEP-ROM COPY DATA		
					54″	62″	47″/55″/65″
RDR	R-Drive	0~63	20	Variable	38	38	38
GDR	G-Drive	0~63	20	(Fix)	32	32	32
BDR	B-Drive	0~63	20	Variable	22	22	22
RCT	R-Cut Off	0~63	31	Variable	8	8	8
GCT	G-Cut Off	0~63	31	Variable	20	20	20
BCT	B-Cut Off	0~63	31	Variable	5	5	5
SBT	Sub-BRT	0~63	15	Variable	28	28	28
CON	Sub-CONT	0~15	7	Variable	5	5	5
COL	Sub-Color	0~15	10	X	10/10/10	10/10/10	10/10/10
HUE	Sub-Tint	0~15	5	X	5	5	5
RYR	R-Y AXIS	0~15	2	X	2	2	2
RYB	R-Y AXIS	0~15	13	X	10	10	10
GYR	R-Y AXIS	0~15	12	X	10	10	10
GYB	R-Y AXIS	0~15	9	X	5	5	5
GAM	Gamma	0~15	10	X	12	12	12
SHP	Sub-Sharp	0~3	3	x	3	3	3
SFO	SHP-FO	0~3	2	x	2/2/3	2/2/3	2/2/3
POV	PRE-OVER	0~3	3	x	3/1/0	3/1/0	3/1/0
LTI	LUMINANCE	0~3	1	x	1	1	1
VML	VM-LBL	0~3	2	x	2/2/2	2/2/2	2/2/2
VMD	VM-PHASE	0~3	0	x	0/0/0	0/0/0	0/0/0
DCT	DC-TRAN	0~3	2	x	2/3/2	2/3/2	2/3/2
DPI	D-PIC	0~3	2	x	2/2/2	2/2/2	2/2/2
HPF	HPF/BCOF	0~15	6	x	6	6	6
VPF	VPF/HCOF	0~15	6	x	6	6	6
VPG	VAPGAIN	0~7	4	x	4	4	4
VPI	VAPINV	0~31	20	x	20	20	20

PICTURE

Item	FUNCTION	RANGE	INITIAL DATA	Performance of adjustment	EEP-ROM COPY DATA		
					54″	62″	47″/55″/65″
RCO		0~100	100	X	100	100	100
GCO		0~100	100	X	100	65	100
BCO		0~100	20	X	20	20	20
BPO		0~255	160	X	160	160	160
BWD		0~255	61	X	61	61	61

4-2-2 D/TV 1080i

GEOMETRIC

Item	FUNCTION	RANGE	INITIAL DATA	Performance of adjustment	EEP-ROM COPY DATA		
					54″	62″	47″/55″/65″
VS	V-Shift	0~255	210	Variable	130	130	130
VA	V-Size	0~255	50	Variable	80	80	80
VL	V-Line	0~255	128	X	120	120	120
VSC	V-S-CORR	0~255	128	X	128	128	128
VE	V-EHT	0~255	0	X	0	0	0
HA	H-Size	0~255	75	Variable	90	90	90
PPH	PIN-PHS	0~255	128	X	128	128	128
PAM	PIN-AMP	0~255	70	X	70	70	70
UPC	UP-CORR	0~255	128	x	128	128	128
LOC	LO-CORR	0~255	128	x	128	128	128
HEH	H-EHT	0~255	0	x	0	0	0
HS	H-Shift	0~127	68	x	68	68	68
VAN	V-Angle	0~255	128	x	128	128	128
VBO	V-Bow	0~255	128	x	128	128	128
HSP	H-Sync-PH	0~255	138	x	138	138	138
OFS	Off set	0~1	0	x	0	0	0
VSO	VS-Offset	0~255	57	Variable	57	85	0
VAO	VA-Offset	0~255	70	Variable	70	95	60
VLO	VL-Offse	0~25	0	Variable	0	0	0
Set after changing the option for 1080i-mode factory-scan (OFS 0->1) *Only DTV 1080i Mode							

4-2-3 D/TV 480P

GEOMETRIC

Item	FUNCTION	RANGE	INITIAL DATA	Performance for adjustment	EEP-ROM COPY DATA		
					54″	62″	47″/55″/65″
VS	V-Shift	0~255	115	Variable	110	110	110
VA	V-Size	0~255	60	Variable	100	100	100
VL	V-Line	0~255	120	X	128	128	128
VSC	V-S-CORR	0~255	128	X	128	128	128
VE	V-EHT	0~255	0	X	0	0	0
HA	H-Size	0~255	70	Variable	82	82	82
PPH	PIN-PHS	0~255	128	X	128	128	128
PAM	PIN-AMP	0~255	70	X	82	82	82
UPC	UP-CORR	0~255	128	x	128	128	128
LOC	LO-CORR	0~255	128	x	128	128	128
HEH	H-EHT	0~255	0	x	0	0	0
HS	H-Shift	0~127	90	Fix	82	82	82
VAN	V-Angle	0~255	128	x	128	128	128
VBO	V-Bow	0~255	128	x	128	128	128
HSP	H-Sync-PH	0~255	138	x	138	138	138
OFS	Off set	0~1	0	x	0	0	0
VSO	VS-Offset	0~255	57	x	57	85	0
VAO	VA-Offset	0~255	70	x	70	95	60
VLO	VL-Offse	0~255	0	x	0	0	0
Set after changing the option for 1080i-mode factory-scan (OFS 0->1) *Only DTV 1080i Mode							

PIP

Item	FUNCTION	INITIAL DATA	Performance for adjustment	EEP-ROM COPY DATA		
				54″	62″	47″/55″/65″
CONTRAST	CONTRAST	8	Variable	8	8	8
HUE	HUE	0	Variable	0	0	0
POS-HOR-L	POS-HOR-L	5	Variable	2	2	2
POS-HOR-R	POS-HOR-R	54	Variable	60	60	60
POS-VER-U	POS-VER-U	5	Variable	21	21	21
POS-HOR-D	POS-HOR-D	33	Variable	22	22	22

OPTION

Item	FUNCTION	INITIAL DATA	Performance for adjustment	EEP-ROM COPY DATA				
				545R	5415R	6215R	4715W	5525W
Byte 0	Option	00	Variable	08	68	68	69	69
Byte 1	Option	00	Variable	00	01	01	01	00
Item	FUNCTION	INITIAL DATA	Performance for adjustment	EEP-ROM COPY DATA				
				552W	5515W	652W	6515W	473W/553W 653W
Byte 0	Option	00	Variable	89	E9	89	E9	09
Byte 1	Option	00	Variable	00	01	00	01	00

Note 1 **SZM-422A OPTION TABLE**

Option adjustments should be done in service mode.


BYTE:00	FUNCTION	FUNCTION		BCD-Code	VALUE
		0	1		
D7	Functional DOOR	X	O	8	
D6	MSP	MSP3452G	MSP3450G	4	
D5	PIP	VPC3230	SDA9488	2	
D4	DOUBLE PIP	O DOUBLE, LARGE, SMALL	X LARGE, SMALL	1	
D3	AUTO-CONVERGENCE	X	O	8	
D2	AFN	IRC	AFN	4	
D1	—	—	—	2	
D0	WIDE OPTION	4:3	16:9	1	

AFN


BYTE:01	FUNCTION	FUNCTION		BCD-Code	VALUE
		0	1		
D7	—	—	—	8	
D6	Sanyo CRT	O	O	4	
D5	—	—	—	2	
D4	1080i DTV Auto Conv	O	X	1	
D3	DTV 1080i ONLY	X	O	8	
D2	DTV 480P ONLY	X	O	4	
D1	DTV Zoom	X (16 : 9)	O (4 : 3, 16 : 9)	2	
D0	3D-COMB FILTER	UPD64082	VPC3230 built-in COMB	1	

4-3 Screen Change (When adjusting I^2C Bus Geometric items)


1 V SHIFT




2 V LINEARITY

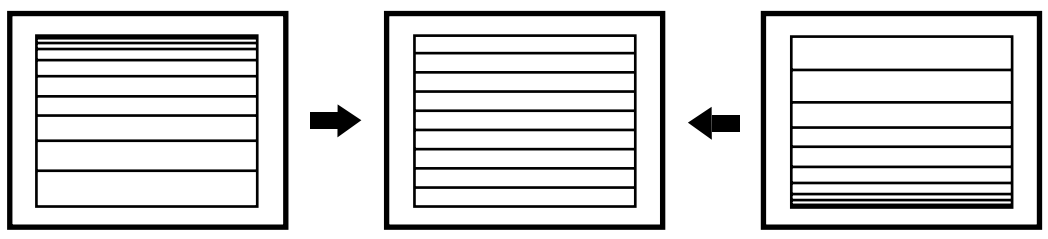


3 H SIZE

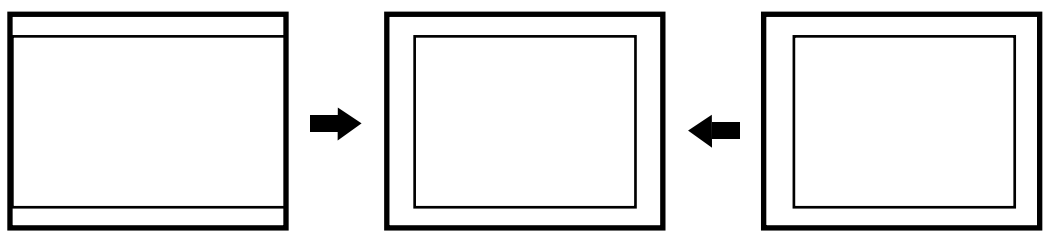


4 PIN AMP

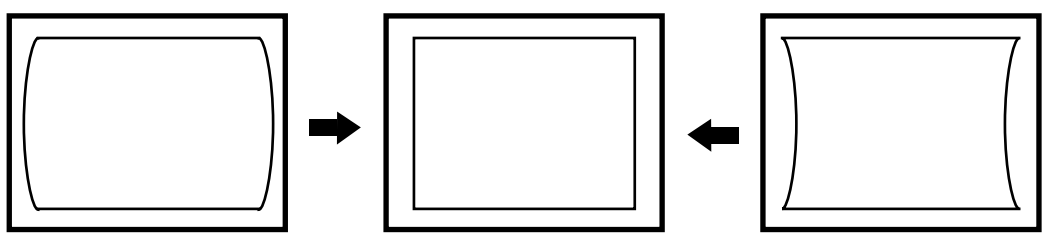


5 V ANGLE

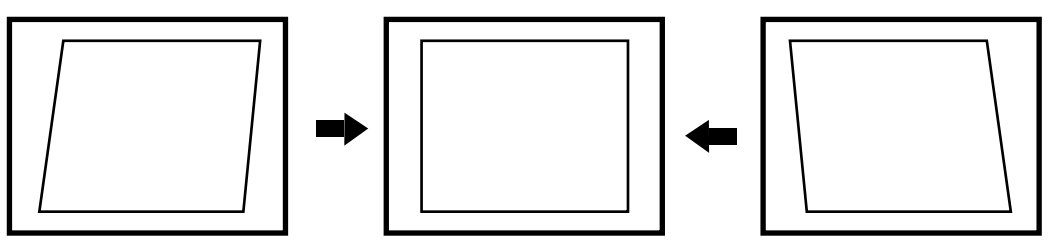


6 V SIZE




7 V - S - CORRECTION

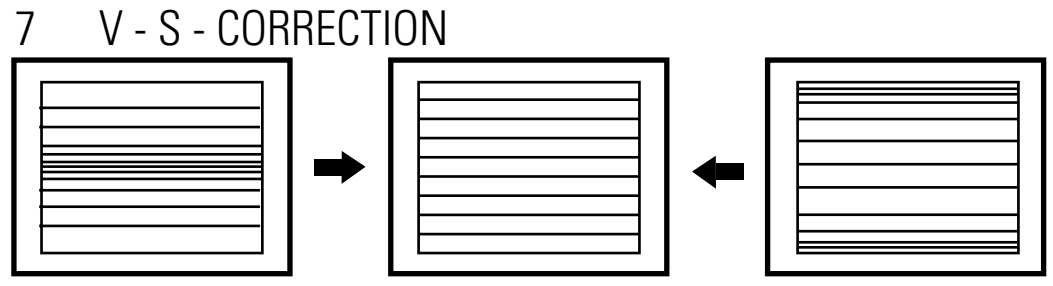


8 PIN PHASE

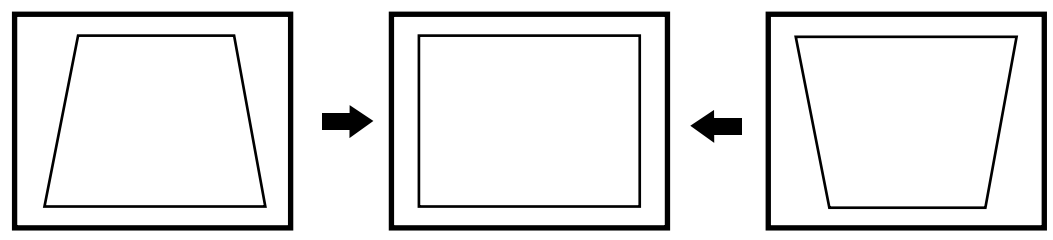

9 H SHIFT

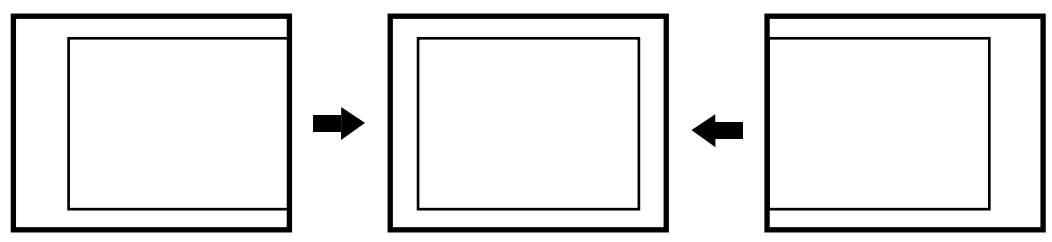

10 V BOW

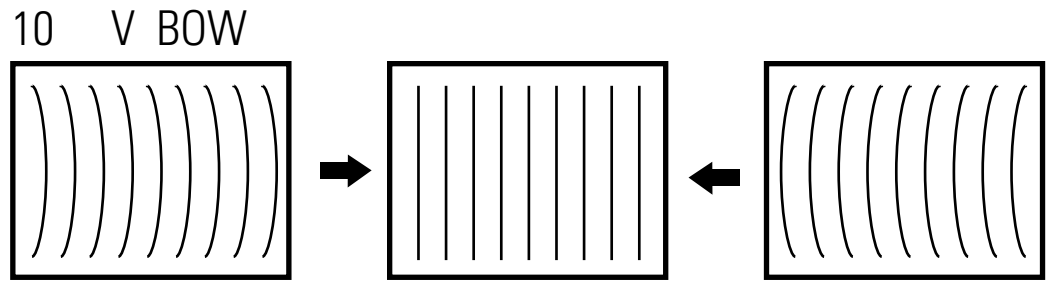

4-4 Other Adjustments

4-4-1 Screen Adjustment

1. Warm up the TV for at least 30 minutes.
2. Turn to the Video Mode (No Signal) using a remote-control.
3. Connect an oscilloscope to RK,GK,BK.
4. Adjust the VR (VR501, VR531, VR561) screen so that RK, GK, BK pulse is 20Vp-p each. (Turn the R,G,B VR screen fully counterclockwise in the area of each flyback line.)

4-4-2 White Balance Adjustment

1. Select the “STANDARD” video mode.
2. Input 100% white pattern.
3. In the stand-by mode, press the remote-control keys in the following sequence:
   Mute → 1 → 8 → 2 → Power ON
4. Warm up the TV for at least 30 minutes.
5. Input a 10-step signal.
6. R-cut off, B-cut off, and G-cut off by pressing the Volume +/- keys.
7. Adjust the low light with viewing the dark side of the screen.
8. Select R-drive, G-drive, and B-drive by pressing the Volume +/- keys.
9. Adjust the high light with viewing the light side of the screen.
10. If necessary, redo adjustments 6~9.
11. Press the Menu key to exit.

4-4-3 Sub-Brightness Adjustment

1. Input a sub-brightness adjustment signal. (TOSHIBA PATTERN)
2. In the stand-by mode, press the remote-control keys in the following sequence :
   Mute - 1 - 8 - 2 - Power ON
3. Select SBT by pressing the Volume +/- keys.
4. Adjust so that the 63 step on the right side of the screen is not seen (Use the Volume +/- keys).
5. Press the Menu key to exit.

4-4-4 High Voltage (29KV) Check

PRECAUTION

1. Input a lion head pattern.
2. Select “STANDARD” video mode.
3. Warm up the TV for at least 10 minutes.
4. Use a 1000:1 probe.

ADJUSTMENT

1. Connect the (+) terminal of the 1000:1 probe to the high voltage distributor and the (-) terminal to GND (located on the deflection board).
2. Adjust RR471S (located on the deflection board) so that the digital meter indicates DC 29KV ± 0.1KV.

4-4-5 F.S. (Fail Safe) Adjustment

Note : The finished product has a well-mounted VR (RR402S).
If necessary, do the F.S. adjustments in the following sequence.

1. Use a digital multimeter.
2. Connect the digital multimeter to the JIG pin (DZ482S) terminals
3. Adjust VR (RR402S) so that the voltage becomes 2.25V.
4. After the adjustments are complete, be sure to mount VR (RR402S) correctly.

4-4-6 F.S. (Fail Safe) Circuit Check

Note : The F.S. Circuit check must be performed after servicing.

1. Turn on the TV.
2. Select the "STANDARD" video mode.
3. Short F/S Test point (located on the SUB PCB). Then, both sound and picture disappear. (Note: Even if the shorted terminals are removed, both sound and picture do not appear. This proves the F.S. circuit is working.)
4. To restore both sound and picture, turn off the TV and reset it after about 30 seconds.

4-4-7 Static Focus Adjustment

PRECAUTION

1. Select the "STANDARD" video mode.
2. Input a crosshatch pattern.
3. Cover the lenses that are not being adjusted.
4. Connect a convergence jig and read data.
5. Adjust the lens for best focus. (See Fig, 4-1, next page)

STATIC FOCUS (CONTINUED)

Vary the focus pack VR (Red, Blue) on the front cabinet. Adjust the TV for best possible focus around the center of the crosshatch pattern, without losing overall screen balance.
Figure Crosshatch Pattern
Examine these points together.




Fig. 4-1 Crosshatch Pattern.

4-4-8 Lens Focus Adjustment

PRECAUTIONS

1. Do this adjustment after the static focus adjustment and the tilt adjustment.
2. Select the "STANDARD" video mode. (Contrast:100, Brightness:50)
3. Input a crosshatch pattern.

ADJUSTMENT

1. Loosen the lens screws.
2. Cover the two lenses that are not being adjusted.
3. Adjust the lens, observing the color aberration vertically and horizontally within 3 blocks of the center of the crosshatch pattern.
4. When the lens is turned clockwise, the color aberration will change as follows:

Lens	Color Aberration Change
R	Orange - Crimson
G	Blue - Red
B	Purple - Green

5. Green lens adjustment:
   Set the lens at the point where Blue just changes to Red. If the color aberration is irregular throughout the picture screen, adjust the lens to show Red color aberration (approximately 1~3 mm area) within a 3-block grid around the horizontal center-line. If the color aberration is irregular, adjust the lens as shown in the diagram below. (Accurate alignment of Green is important for overall color quality.)
6. Red lens adjustment
   Set the Red lens at the point where Orange becomes Crimson.
7. Blue lens adjustment
   Set the Blue lens at the point where Purple becomes Green.




Fig. 4-2 Color Aberration

4-4-9 Horizontal Dynamic Focus Adjustment

PRECAUTION

1. Input a crosshatch pattern.
2. Select the “STANDARD” video mode.
3. Warm up the set for at least 10 minutes.

ADJUSTMENT

1. Cover the Red and Blue lenses.
2. Use a digital multimeter.
3. Connect the '+' terminal of digital multimeter to D-Focus and the '-' terminal to GND.
4. Adjust L434 located on the sub PCB so that the digital multimeter indicates AC690V ± 20Vp-p.
5. Balance the left and right sides of the dynamic focus lines.

4-5 Hige Voltage Part

4-5-1 PWM REG Circuit

For the existing high voltage REG circuit (input voltage variation type), a dynamic REG response is not provided. So it is difficult for both beam linearity and uniformity in screen size to be maintained on the screen with rapidly changing beams.

A PWM (Pulse Width Modulation) type of high voltage, however, provides the maintenance of beam linearity and uniformity in screen size via a quick response to beam change by performing sync lock every 1H line, and detecting beam fluctuation at 1H line, and then controlling the IC current of high voltage output circuit.

1. High Voltage Fluctuation Detect (DC Detect)


FBT pin 11 detects DC high voltage fluctuation. The detected DC high voltage value is input to PWM IC471 pin1 through R473, VR471, R471, and then it is input to a differential AMP circuit that differentiates the gap after comparing with the reference voltage input to pin2.

2. High Voltage Fluctuation Detect (AC Detect)

To check AC high voltage fluctuation, the output from FBT is detected by using a capacitor inside the high voltage distributor. The detection of AC high voltage fluctuation,
a detection of dynamic beam current change is required in order to keep beam linearity and uniformity in size.
Regarding the capacitor, a capacity of less than 3000P should be applied to a PWM type. (The existing type needs a capacity of about 6000P.)
AC detect circuit eliminates unnecessary high frequency by using C476, D472. Also, AC gain is limited to + / - 0.7V (D472). This AC gain is combined with the detection value of DC high voltage fluctuation by using C478.

3. PWM IC OSC Sync Lock

A PWM type IC needs sync lock for PWM pulse and horizontal scan line.
The standard time constant of OSC circuit is determined by C487, R475 (PWM IC pins 5 and 6).
And the standard OSC frequency is about 27 kHz . The horizontal frequency of scan line is 31.5kHz(NT), 3375kHz(DTV), 15.75kHz(Interface), so sync lock for this horizontal frequency should be performed using sync lock circuit. The sync lock circuit consists of Q481(Tr KSC815-Y), D479, D478, and C492. The input AFC signal is connected to PWM IC pin 5 through D479 so that it can be negative Trig.

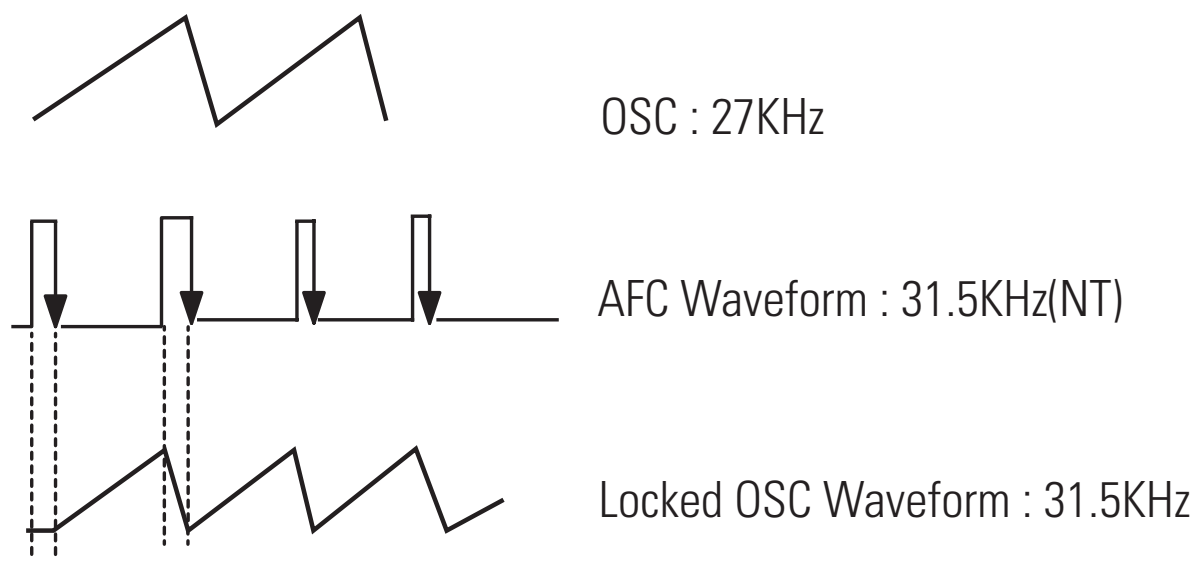


4. Dead Time (HV Protect)

Dead Time (PWM IN pin4) consists of C481, delays high voltage for a certain time to soft start in power on, a x-ray protection circuit.
The voltage of Dead Time is detected by FBT pin7 and through DC Feedback. The normal voltage of Dead Time is +27V. When high voltage increases, however, detected voltage is in proportion to high voltage. Then, the detected voltage is applied to ICR01S(TL431).
If the voltage is over 2.5V (normal:about 2.25V), TL431 turns ON, the base port of QR401S becomes low, and then an emitter current flows. At this time, a high voltage protection point is set. When QR401S turns ON, high voltage is applied to PWM IC pin4 and then muted.

5. Output Circuit

The voltages, which are detected form an error detection circuit of PWM IC (Differential AMP) and Dead Time, each is applied to PWM comparator . Due to these detection coltages, Q1, Q2 (Output TR) parallel operate. Q482 (External TR), however, functions as a buffer; natches inpedance between the output port of PWM IC and the final output TR(IRFS640). The PWM pulse (applied to the final output FET (IRFS640 GATE) varies the IC current of high voltage TR(Q473) by adjusting the load impedance of starage Trans (T431). Due to this variation of current, the gain for Q473 emitter pulse changes T444(FBT)makes this emitter pulse became high voltage. Such change keeps both dynamic and static changes fixed. The output waveform of high valtage TR emitter is as shown in the figure below.

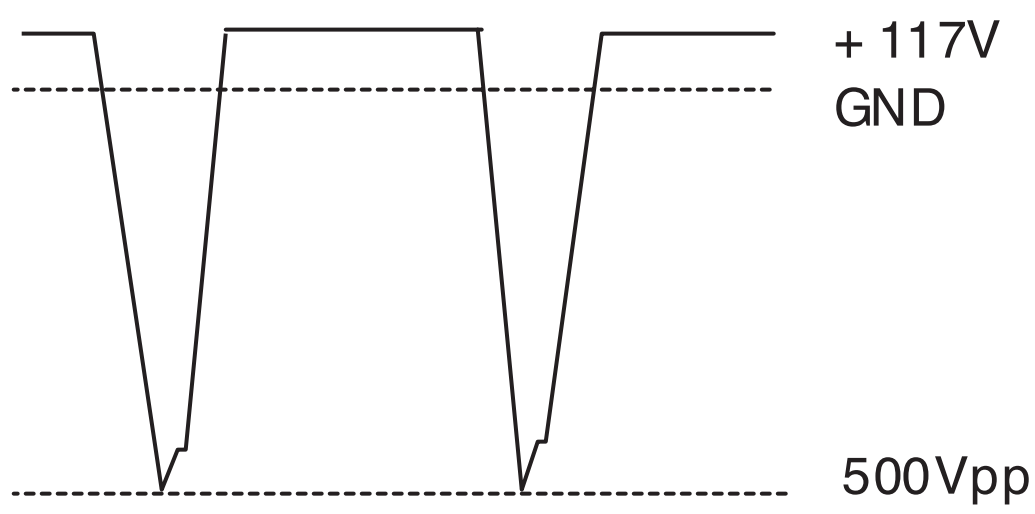


6. Paraneters according to beam

To maintain the set high voltage value (31kV), parmaters such as +Ve (DC), Vcp High Voltage change (See the table below).

Factor of high voltage change	Parameters			
	Width of FET Gate Pulse	+ Ve (DC)	Vcp	High Voltage
Beam ↓ (High voltage ↑)	↓	↑	↓	↓
Beam ↓ (High voltage ↑)	↑	↓	↑	↑

7. Response Waveform


To reduce unstable high voltage fluctuation, the existing high voltage type REG circuit controls dynamic fluctuation by using C-block capacitor. But, it can't detect actual dynamic fluctuation. Also, its velocity of response to static fluctuation is late because +B power supply changes per about 1V. A PWM modulation type REG detects static, dynamic high voltage fluctuation for only Ton Time (when the current of the output TR collector flows) each 1H, and modulates the width of PWM pulse. So, this PWM type has better improvement in the characteristic of high voltage REG as compared to the existing type.

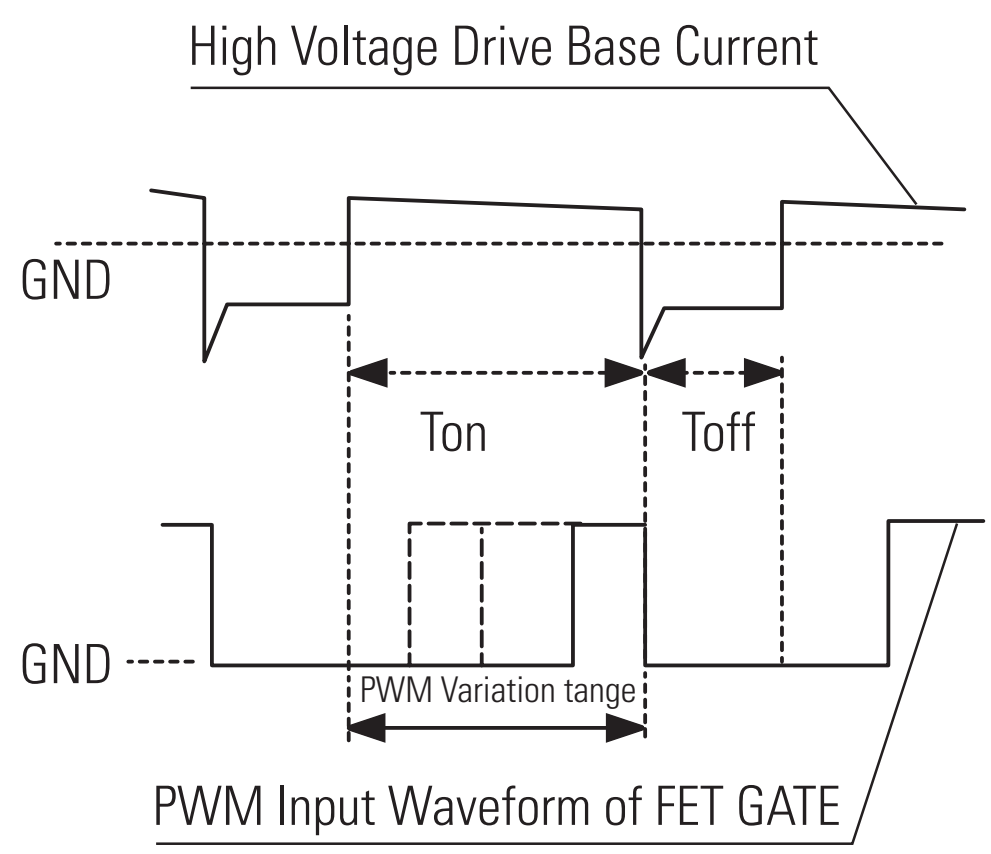


8. Application Effects


1) Improvement of horizontal size fluctuation
2) Linearity improved
3) Embodiment of X-ray protection circuit

The figures below show characteristics when a PWM high voltage REG circuit is applied.

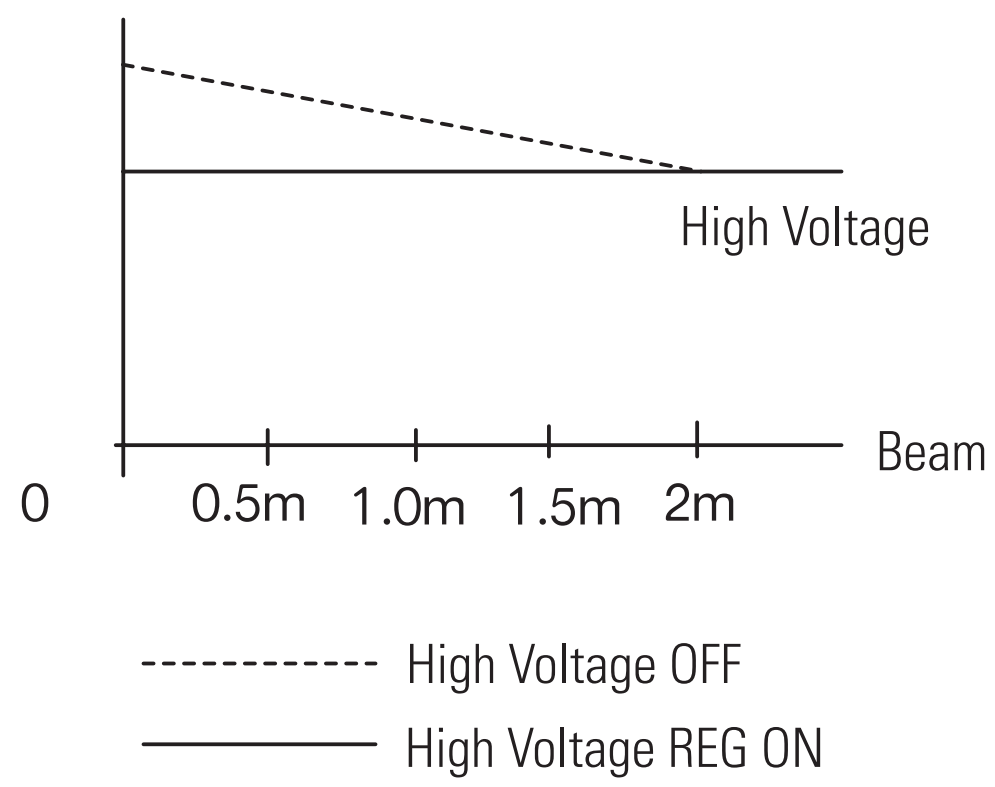

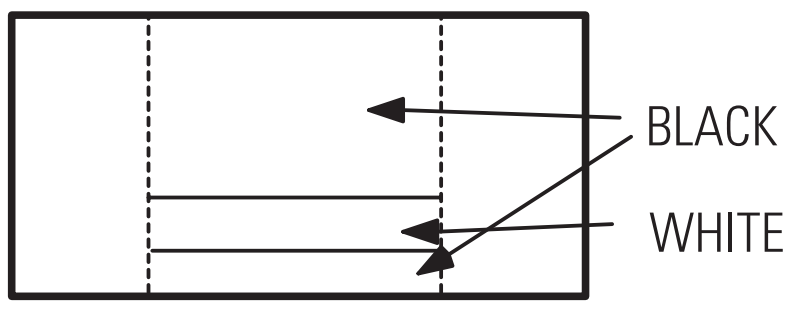

PWM type




When a Toshiba Pattern is recrived, the screen is displayed as shown in figute side

Existing type

4-6 Screen-Jig

4-6-1 PCL545R/PCL5415R(NORMAL MODE)


Screen Size : X 1098.4, Y 827.4 (X:378=9*2+30*12, Y:440=28*2+64*6)

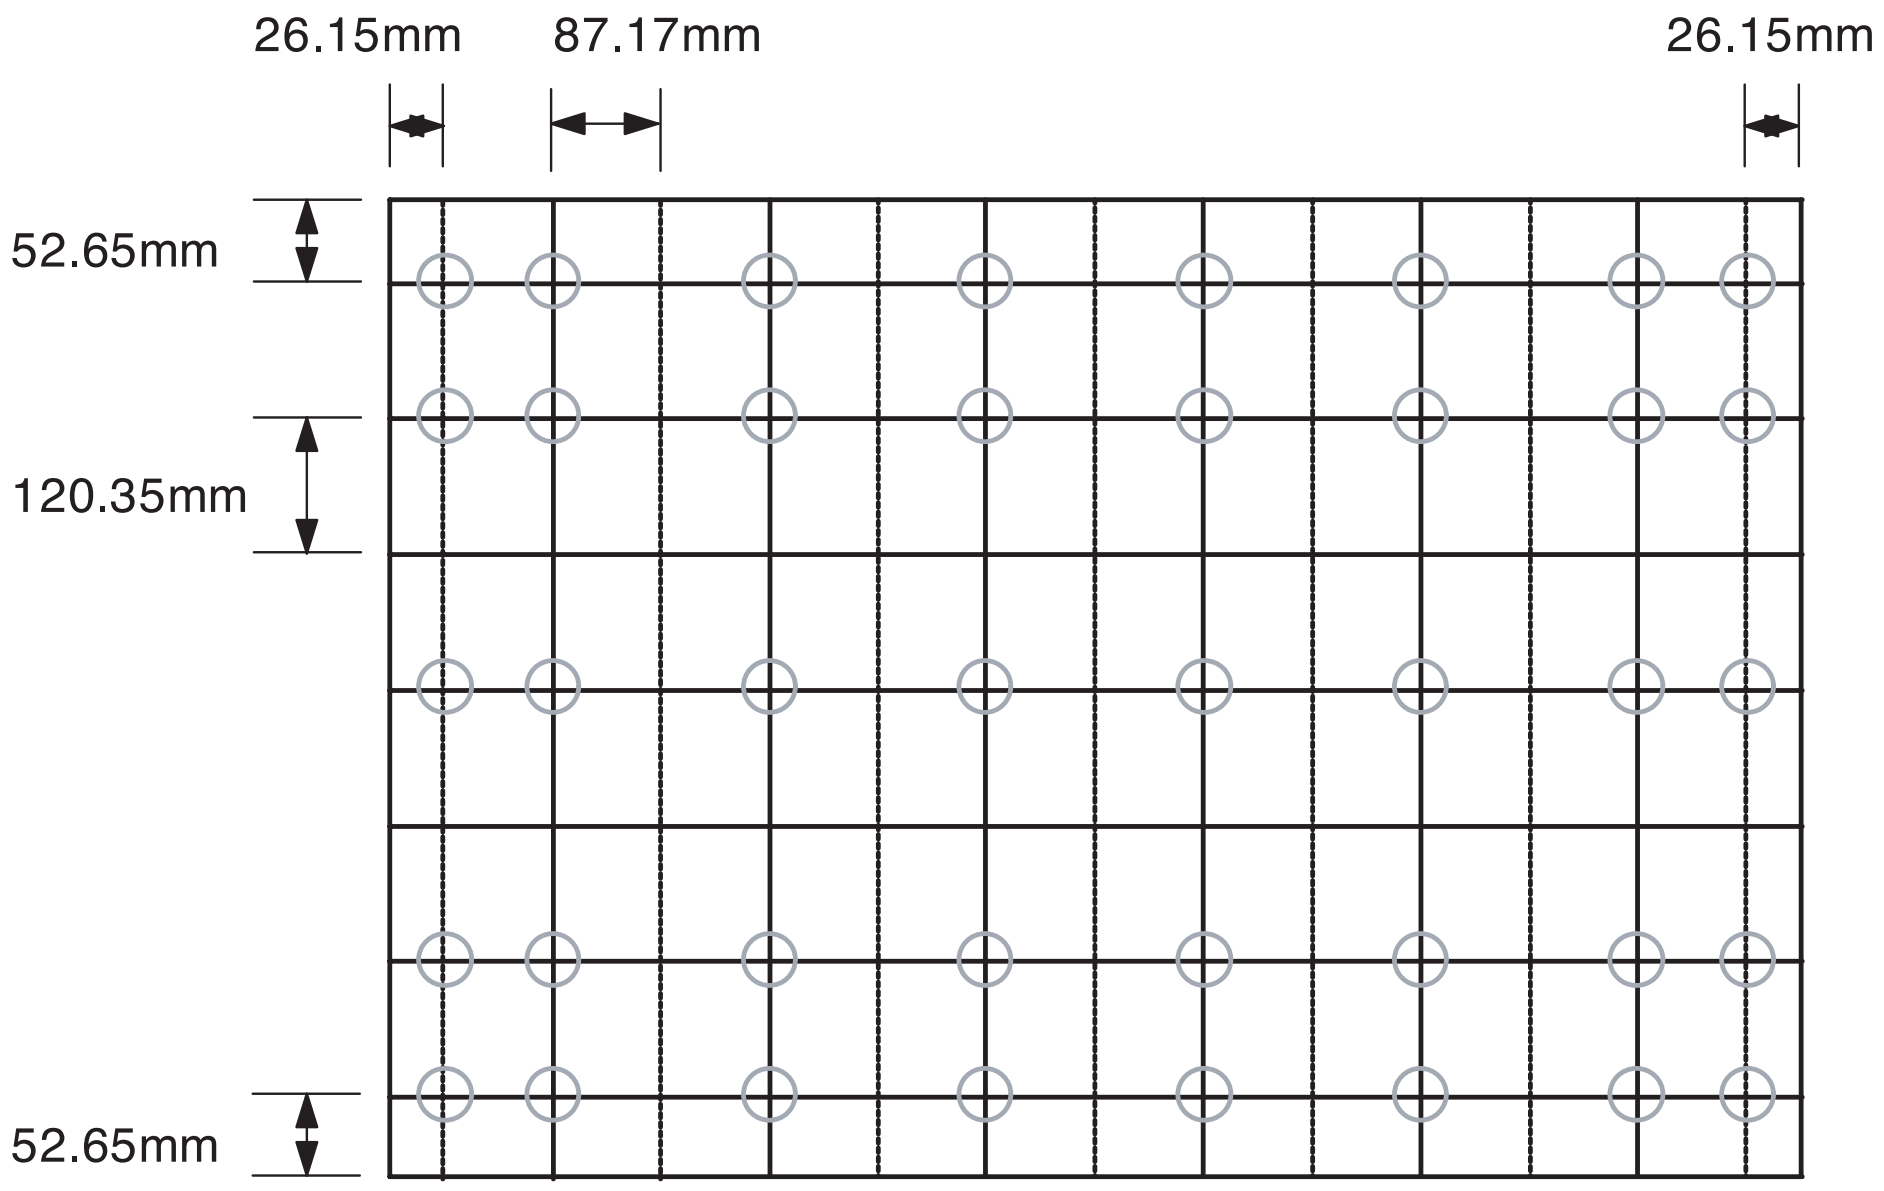

Note: "O" Cursor Point

4-6-2 PCL545R/PCL5415R(DTV MODE)


Screen Size : X 1098.4, Y 627.4(X:378=9*2+30*12, Y:488=40*2+68*6)

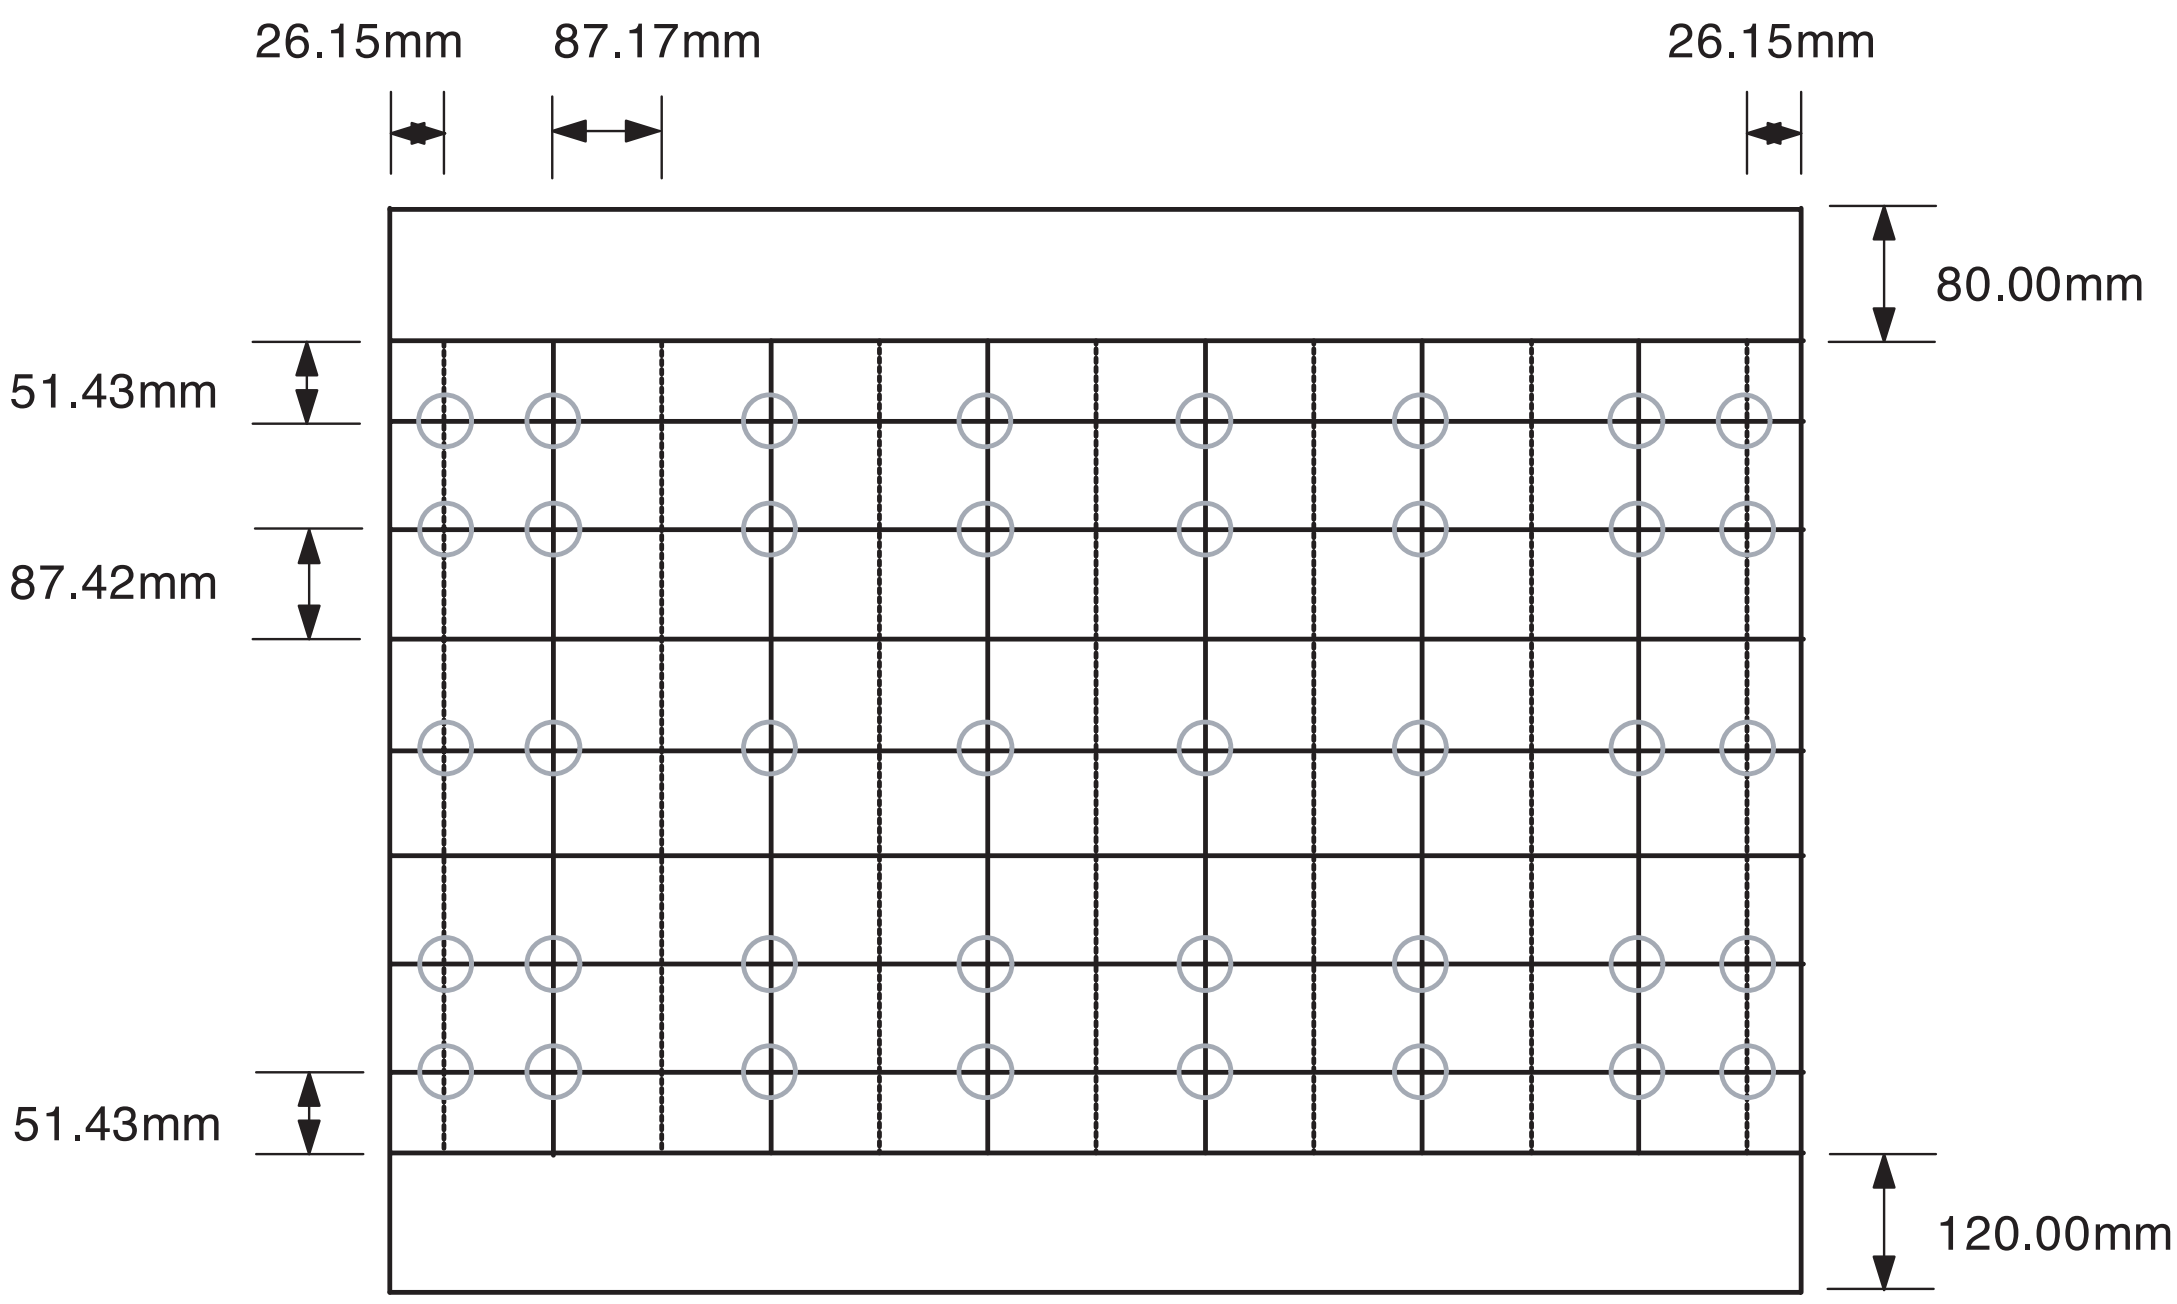

Note: "O" Cursor Point

4-6-3 PCL6215R(NORMAL MODE)


Screen Size : X 1253, Y 943 (X:378=9*2+30*12, Y:440=28*2+64*6)

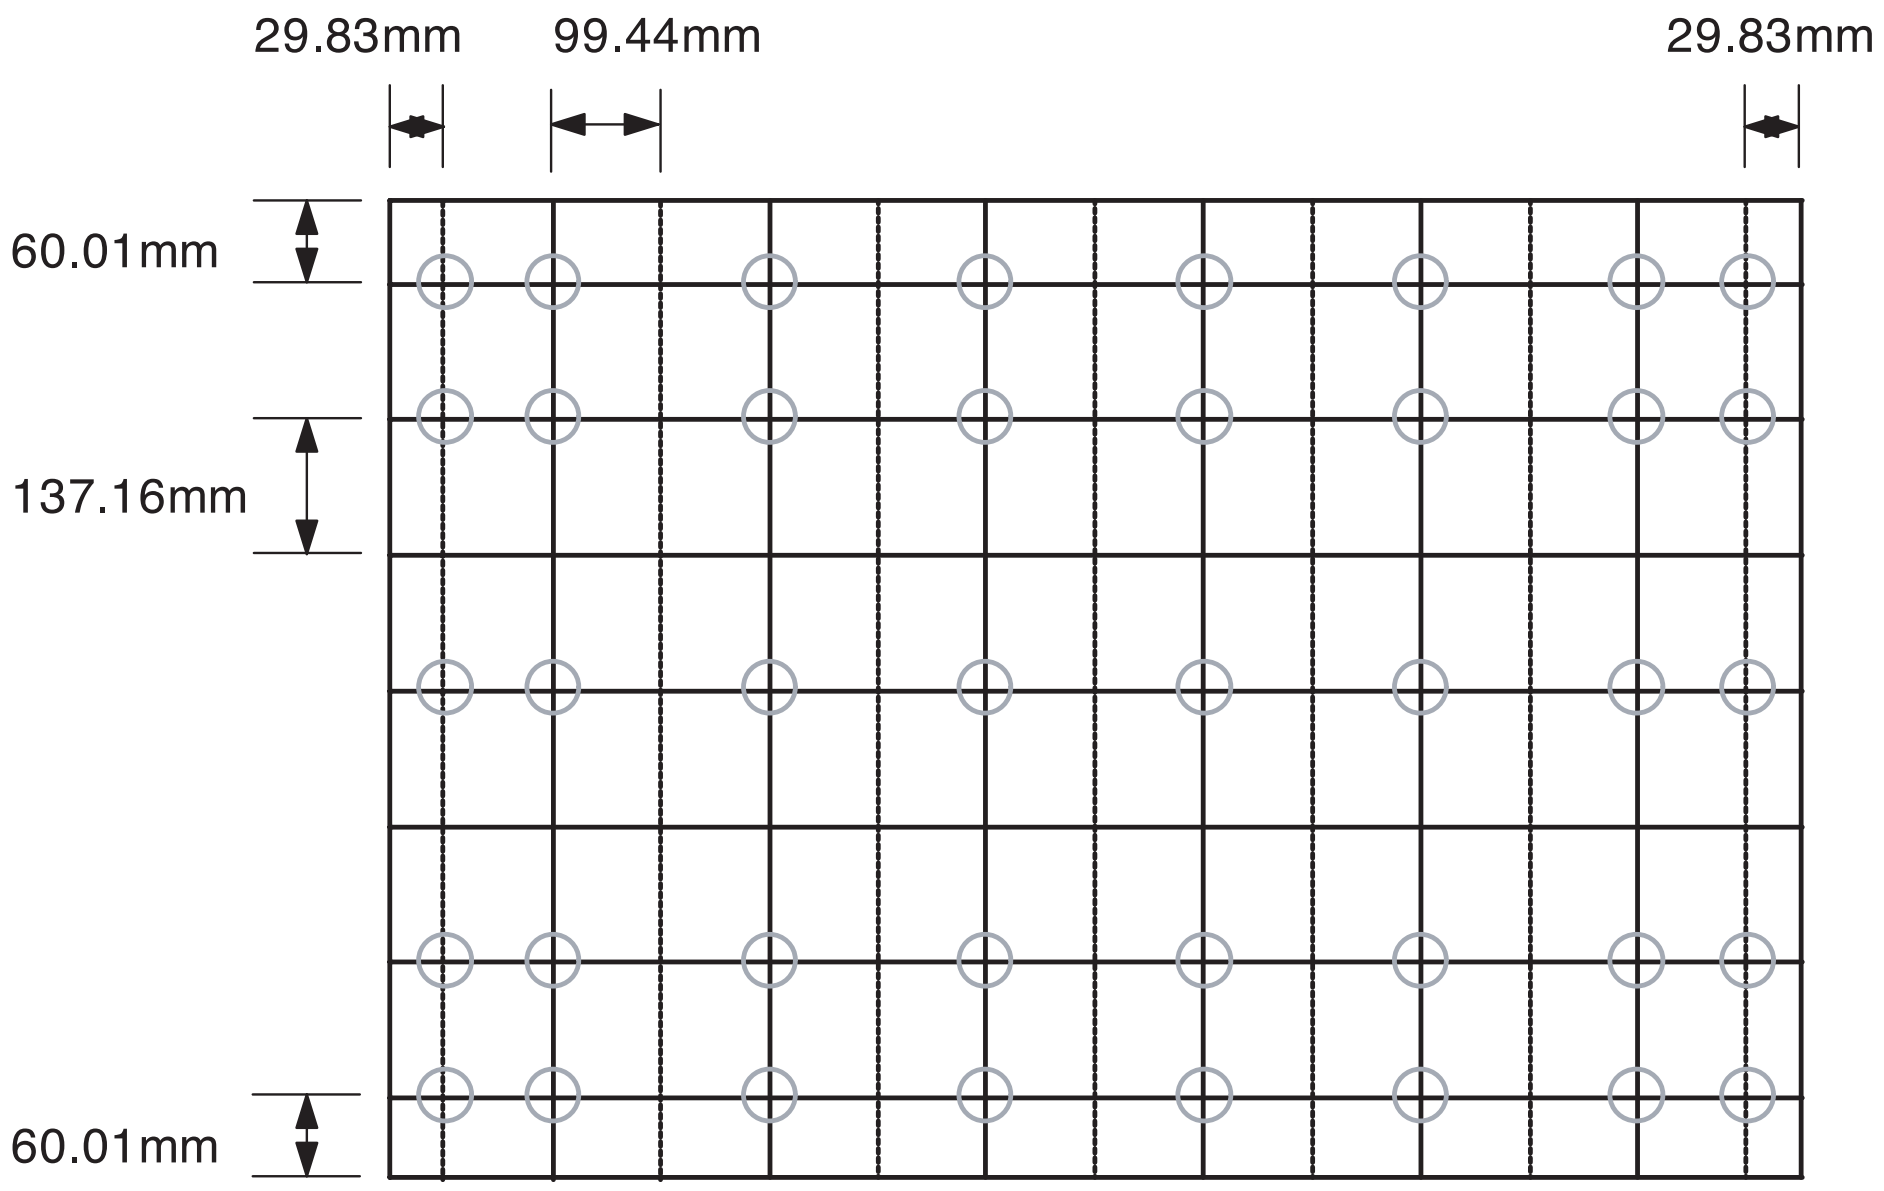

Note: "O" Cursor Point

4-6-4 PCL6215R(DTV MODE)


Screen Size : X 1253, Y 688+90+165(X:378=9*2+30*12, Y:488=40*2+68*6)

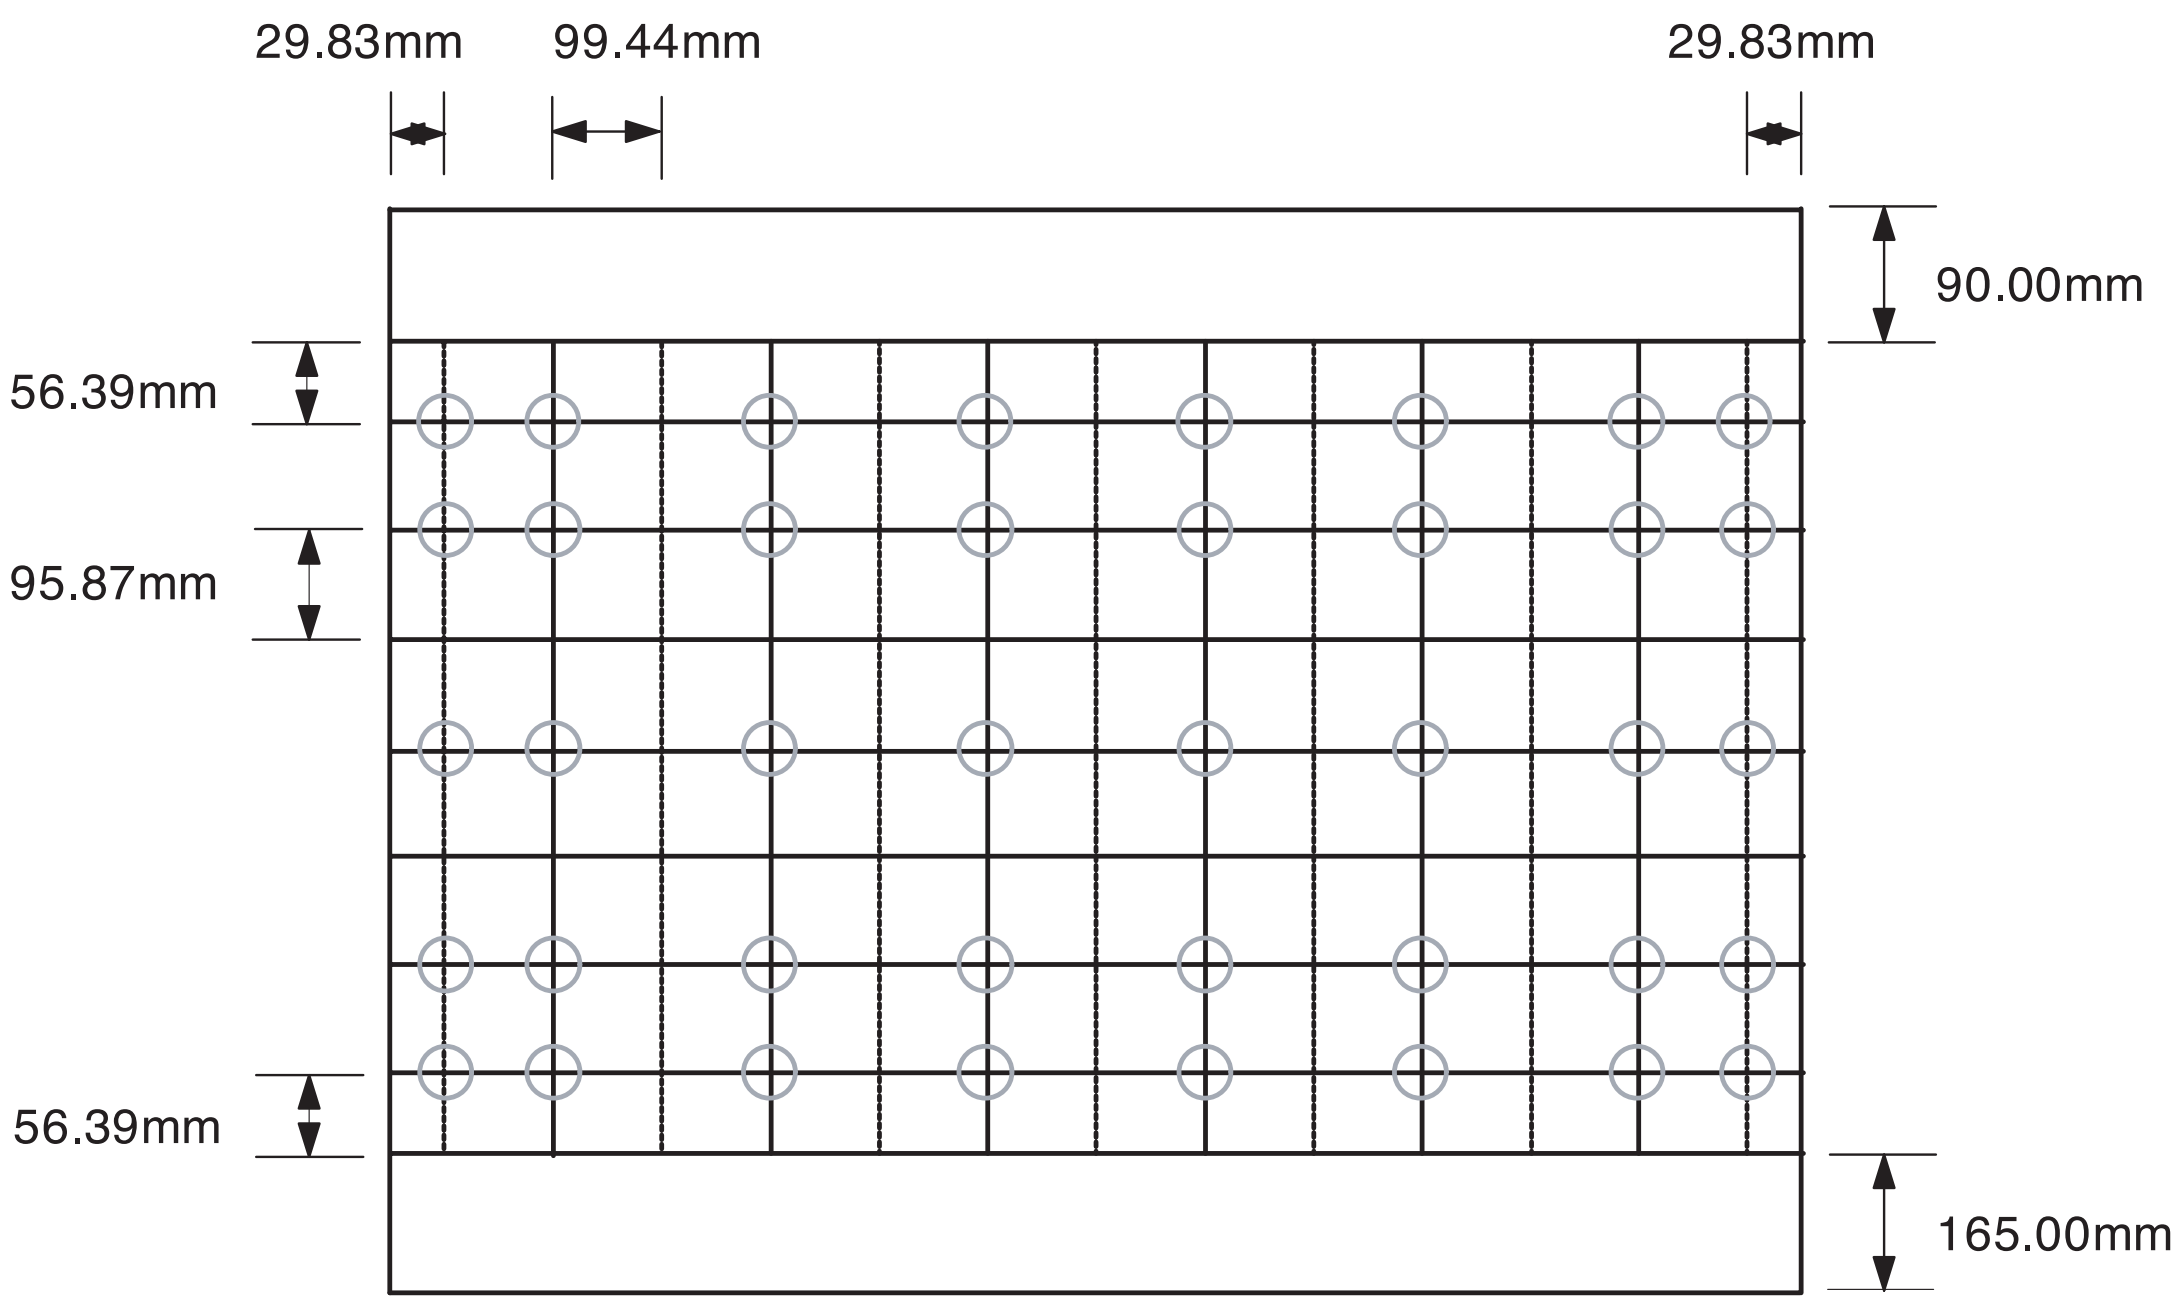

Note: "O" Cursor Point

4-6-5 473W/4715W (NORMAL MODE)


Screen Size : X 1019.4 Y 573.4(X:378=9*2+30*12, Y:440=28*2+64*6)

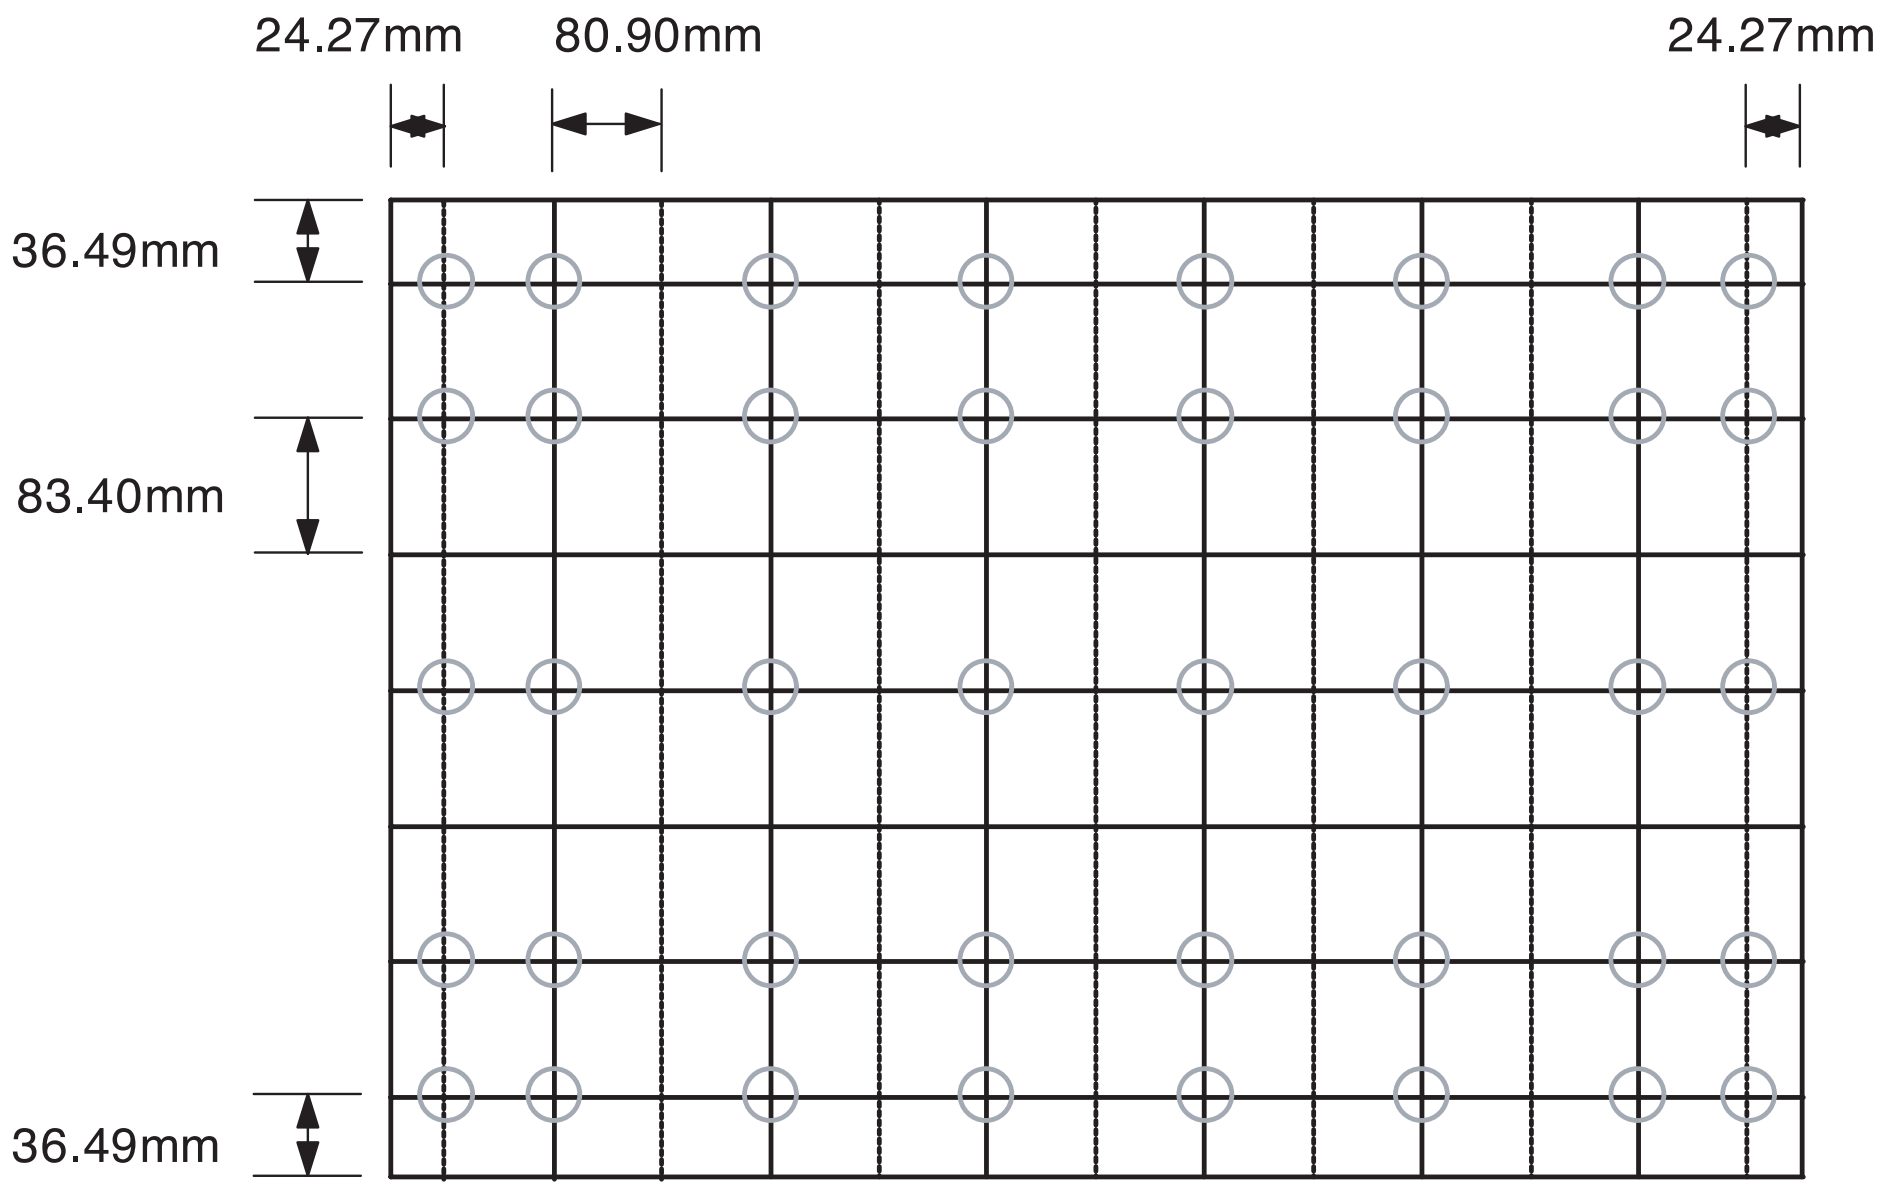

Note: "O" Cursor Point

4-6-6 473W/4715W (DTV MODE)


Screen Size : X 1019.4 Y 573.4 (X:378=9*2+30*12, Y:488=40*2+68*6)

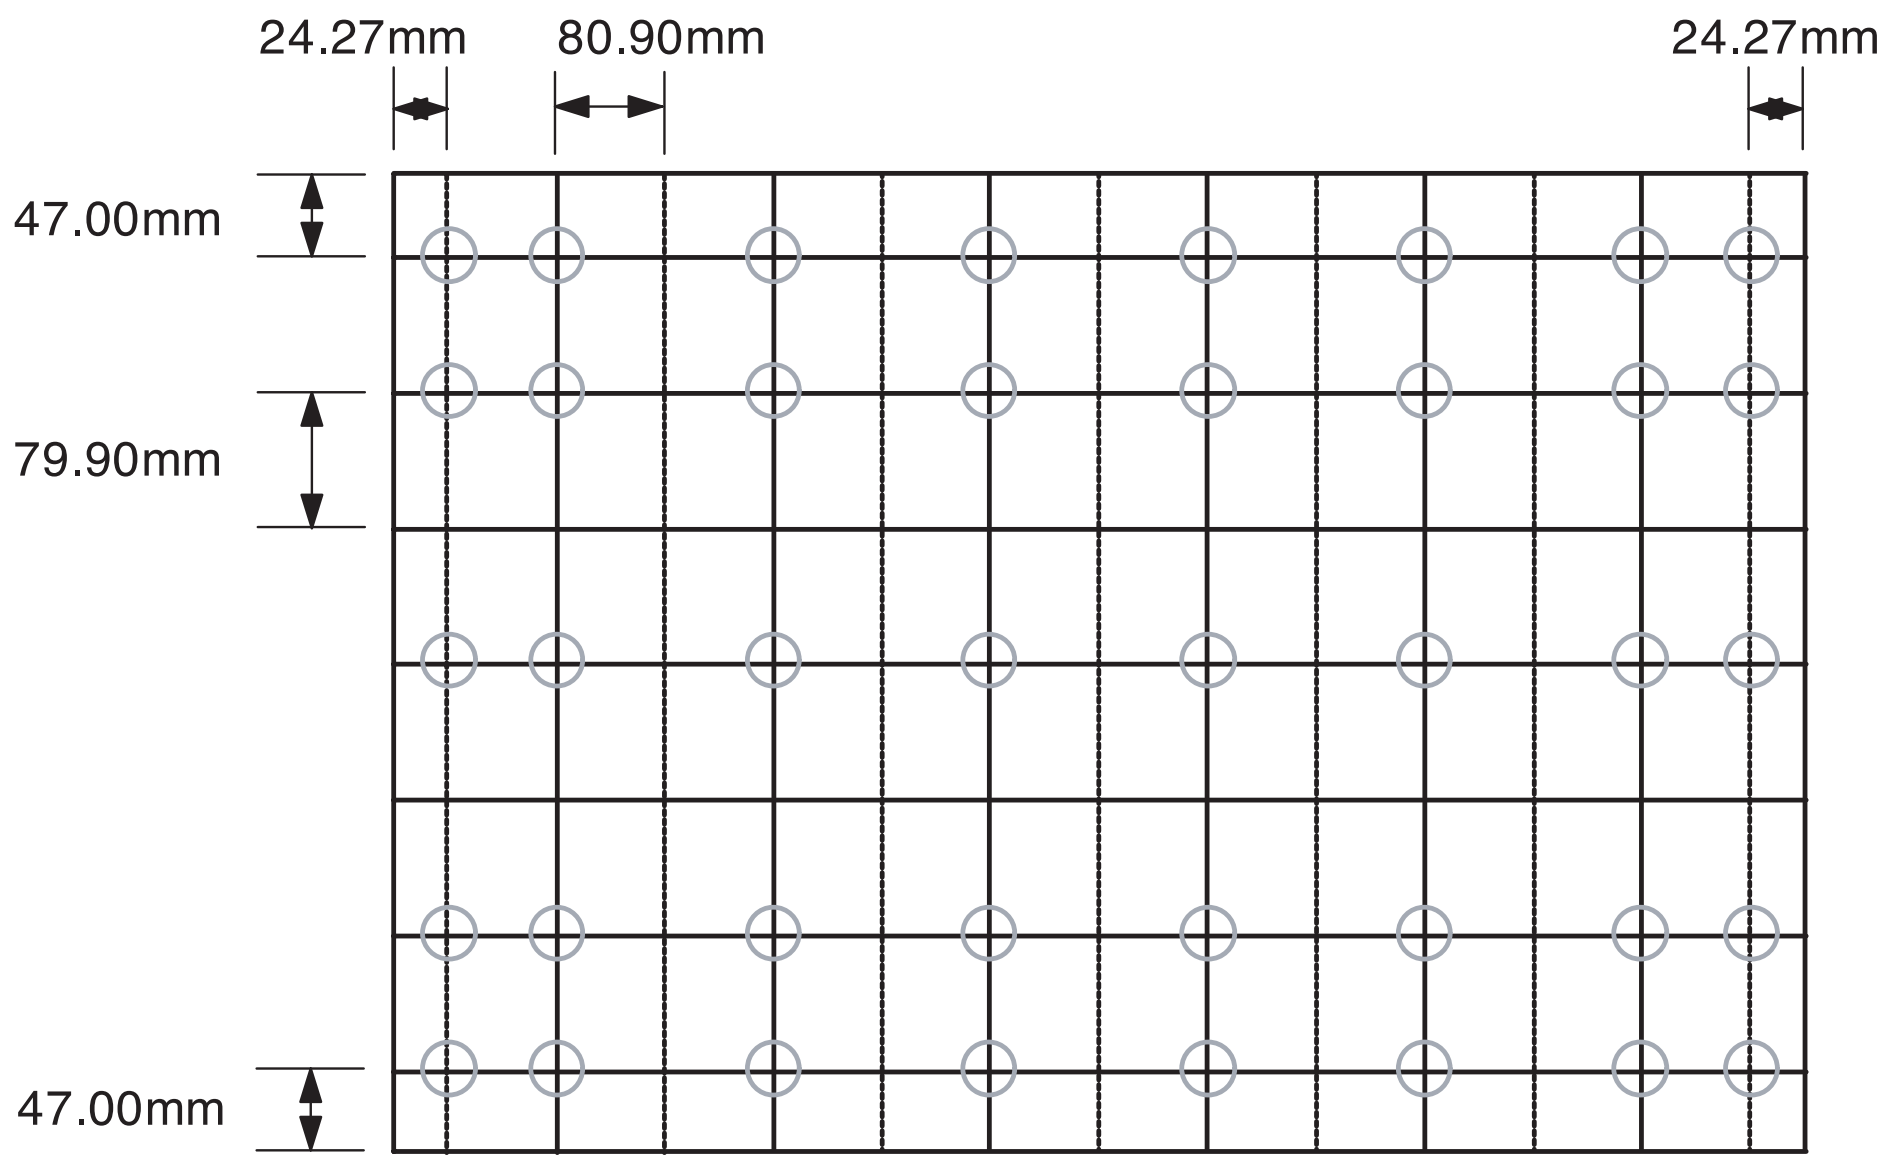

Note: "O" Cursor Point

4-6-7 552W/5515W/5525W/553W(NOMAL MODE)


Screen Size : X 1215, Y 680 (X:378=9*2+30*12, Y:440=28*2+64*6)

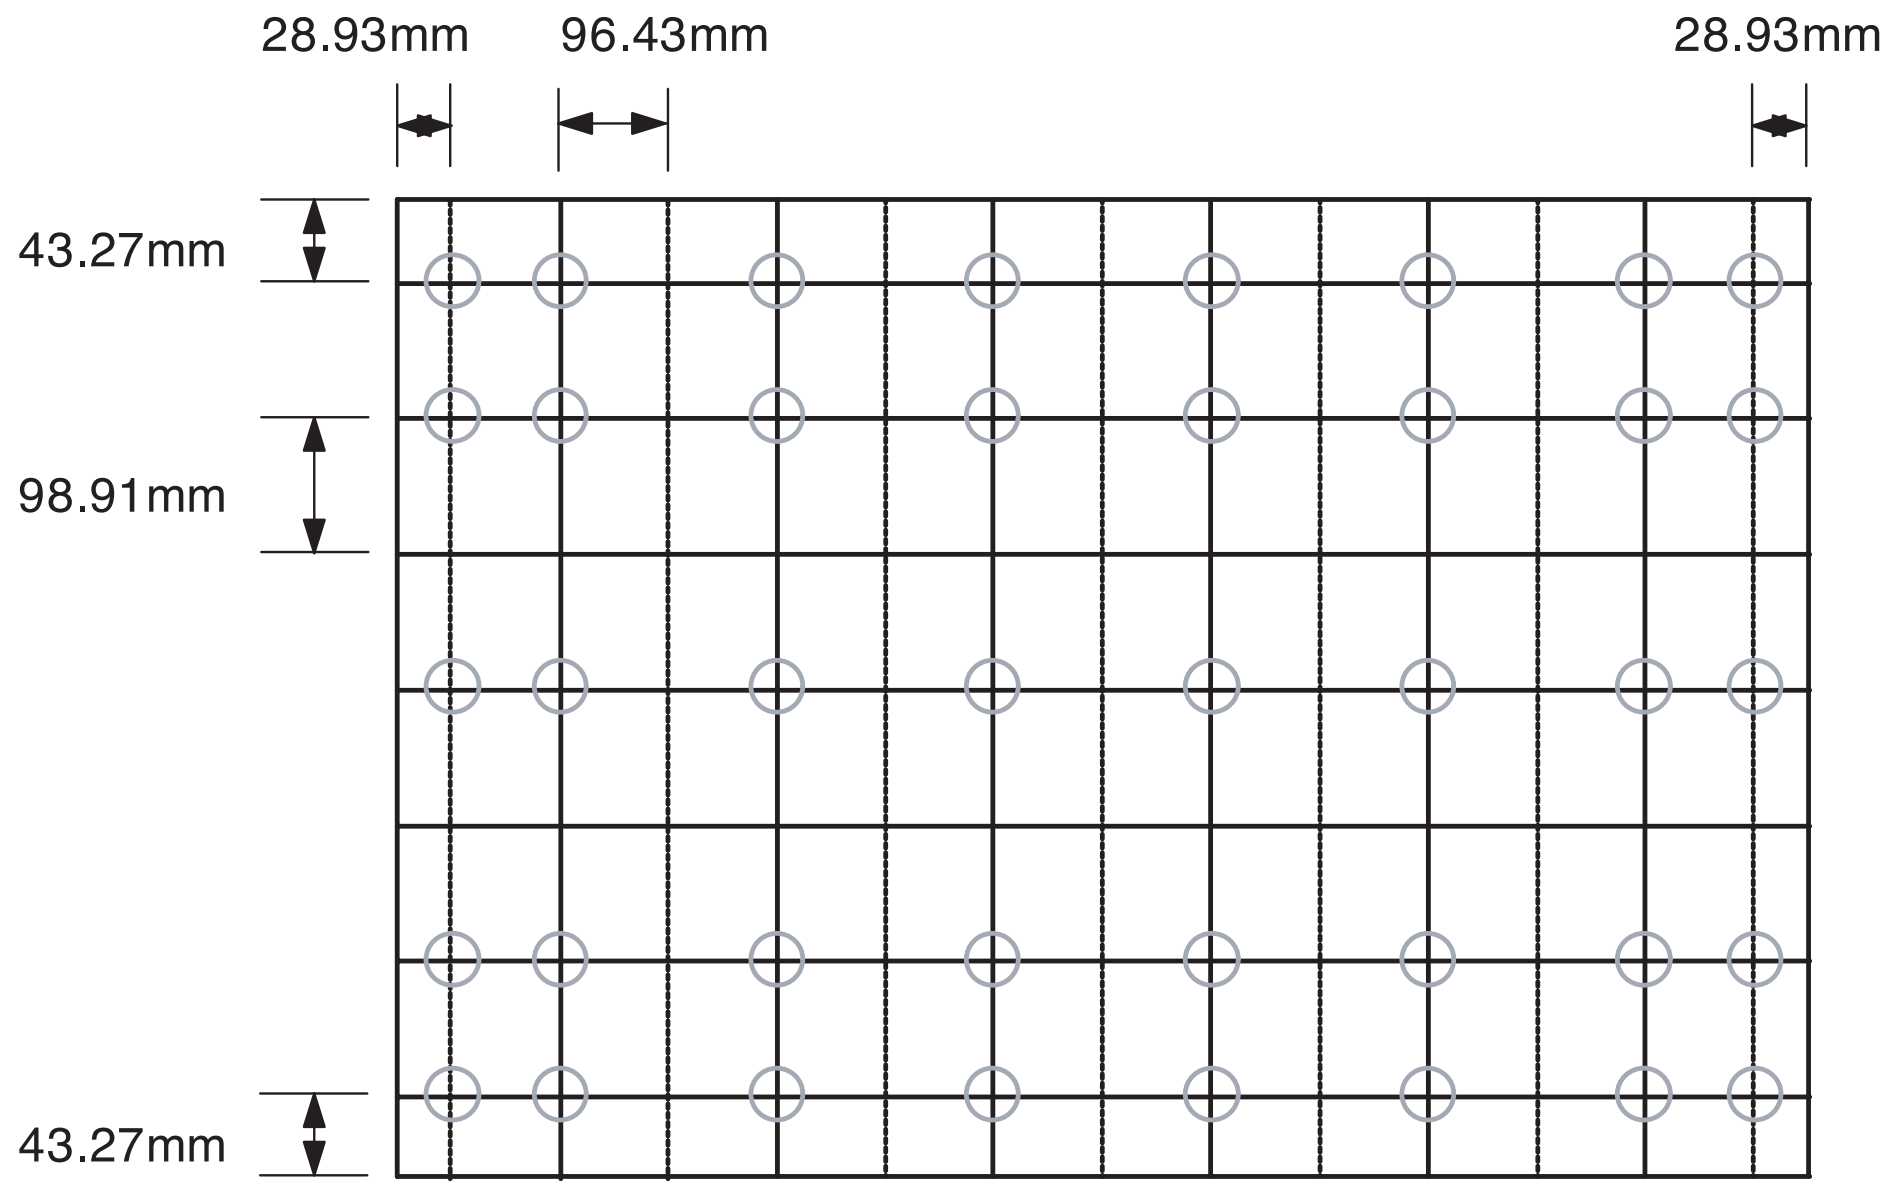

Note: "O" Cursor Point

4-6-8 552W/5515W/5525W/553W(DTV MODE)


Screen Size : X 1215, Y 680 (X:378=9*2+30*12, Y:488=40*2+68*6)

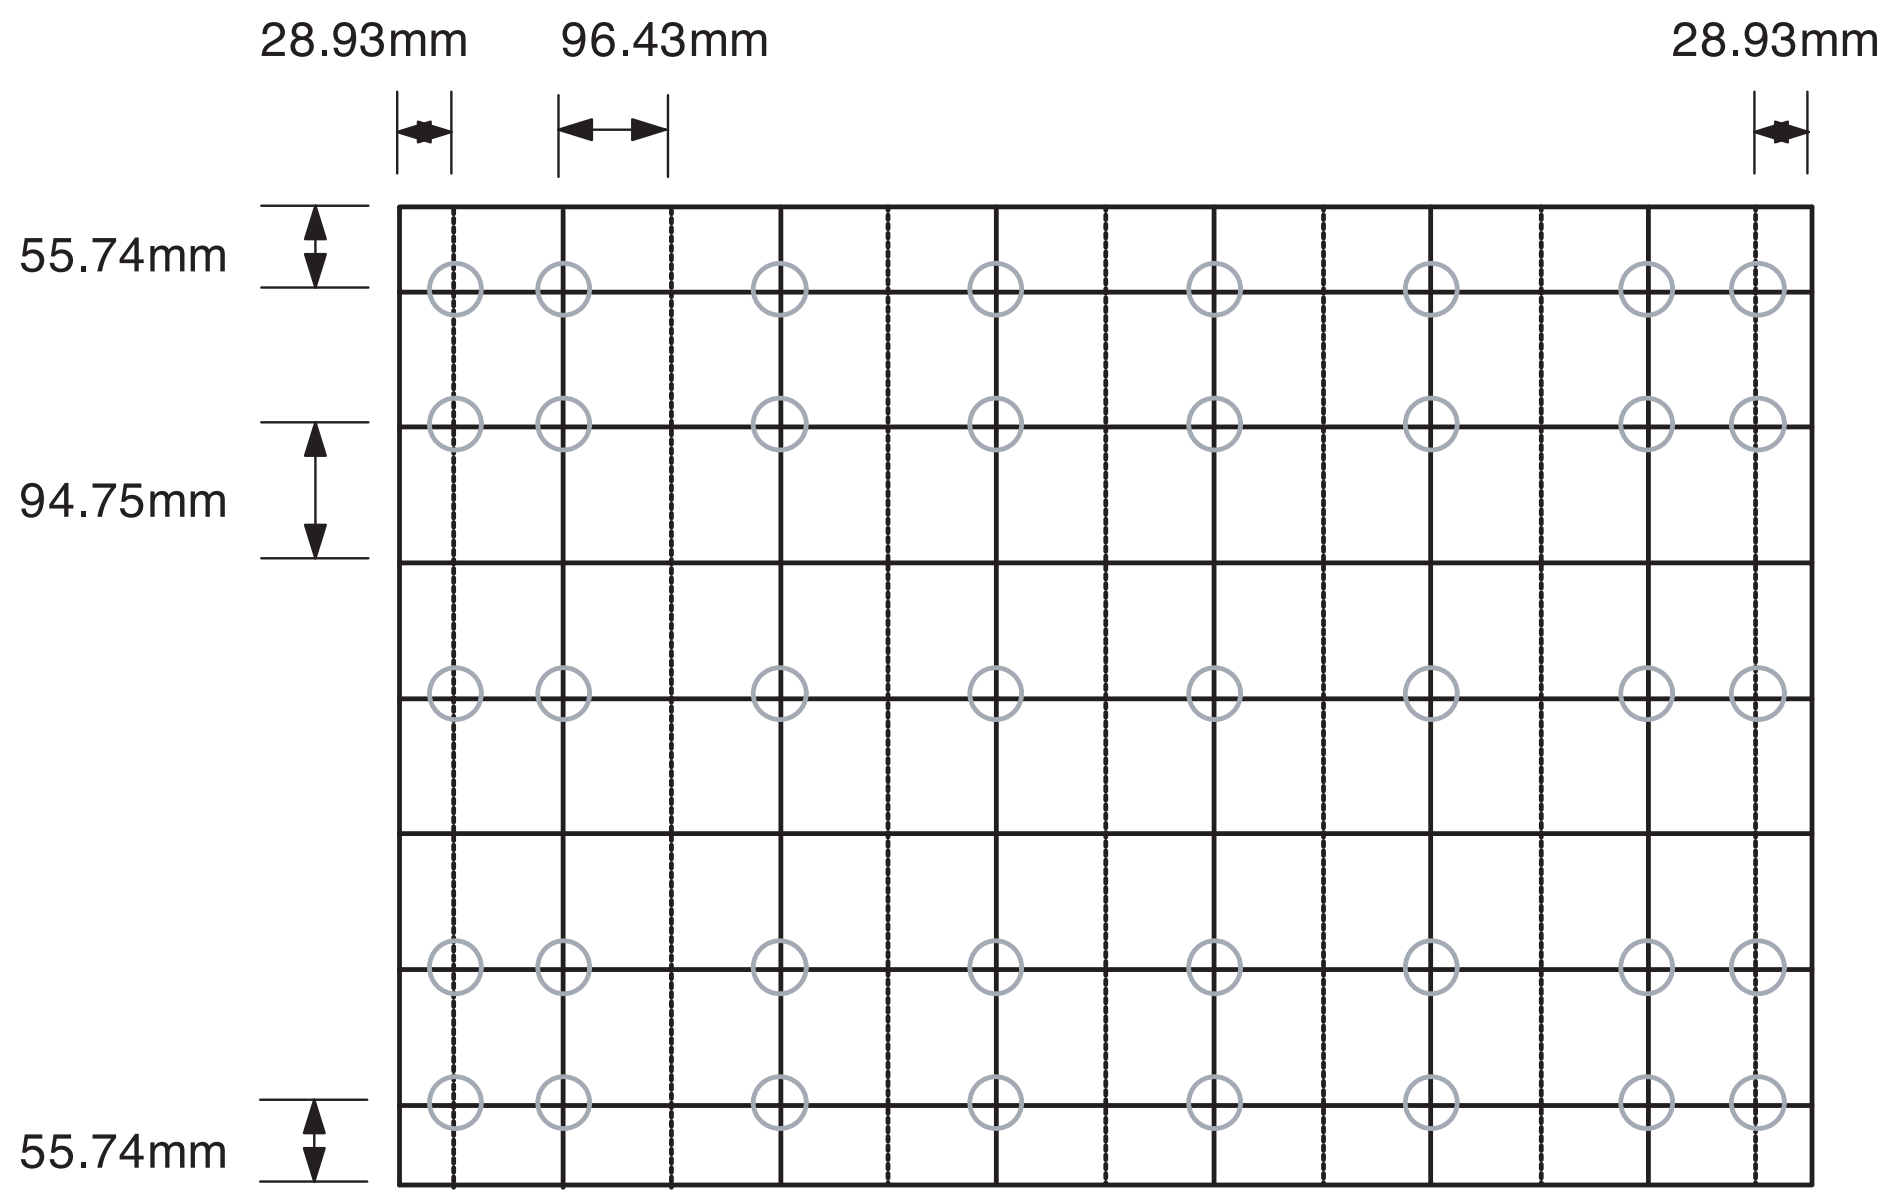

Note: "O" Cursor Point

4-6-9 652W/653W/6515R(NORMAL MODE)


Screen Size : X 1444, Y 832 (X:378=9*2+30*12, Y:440=28*2+64*6)

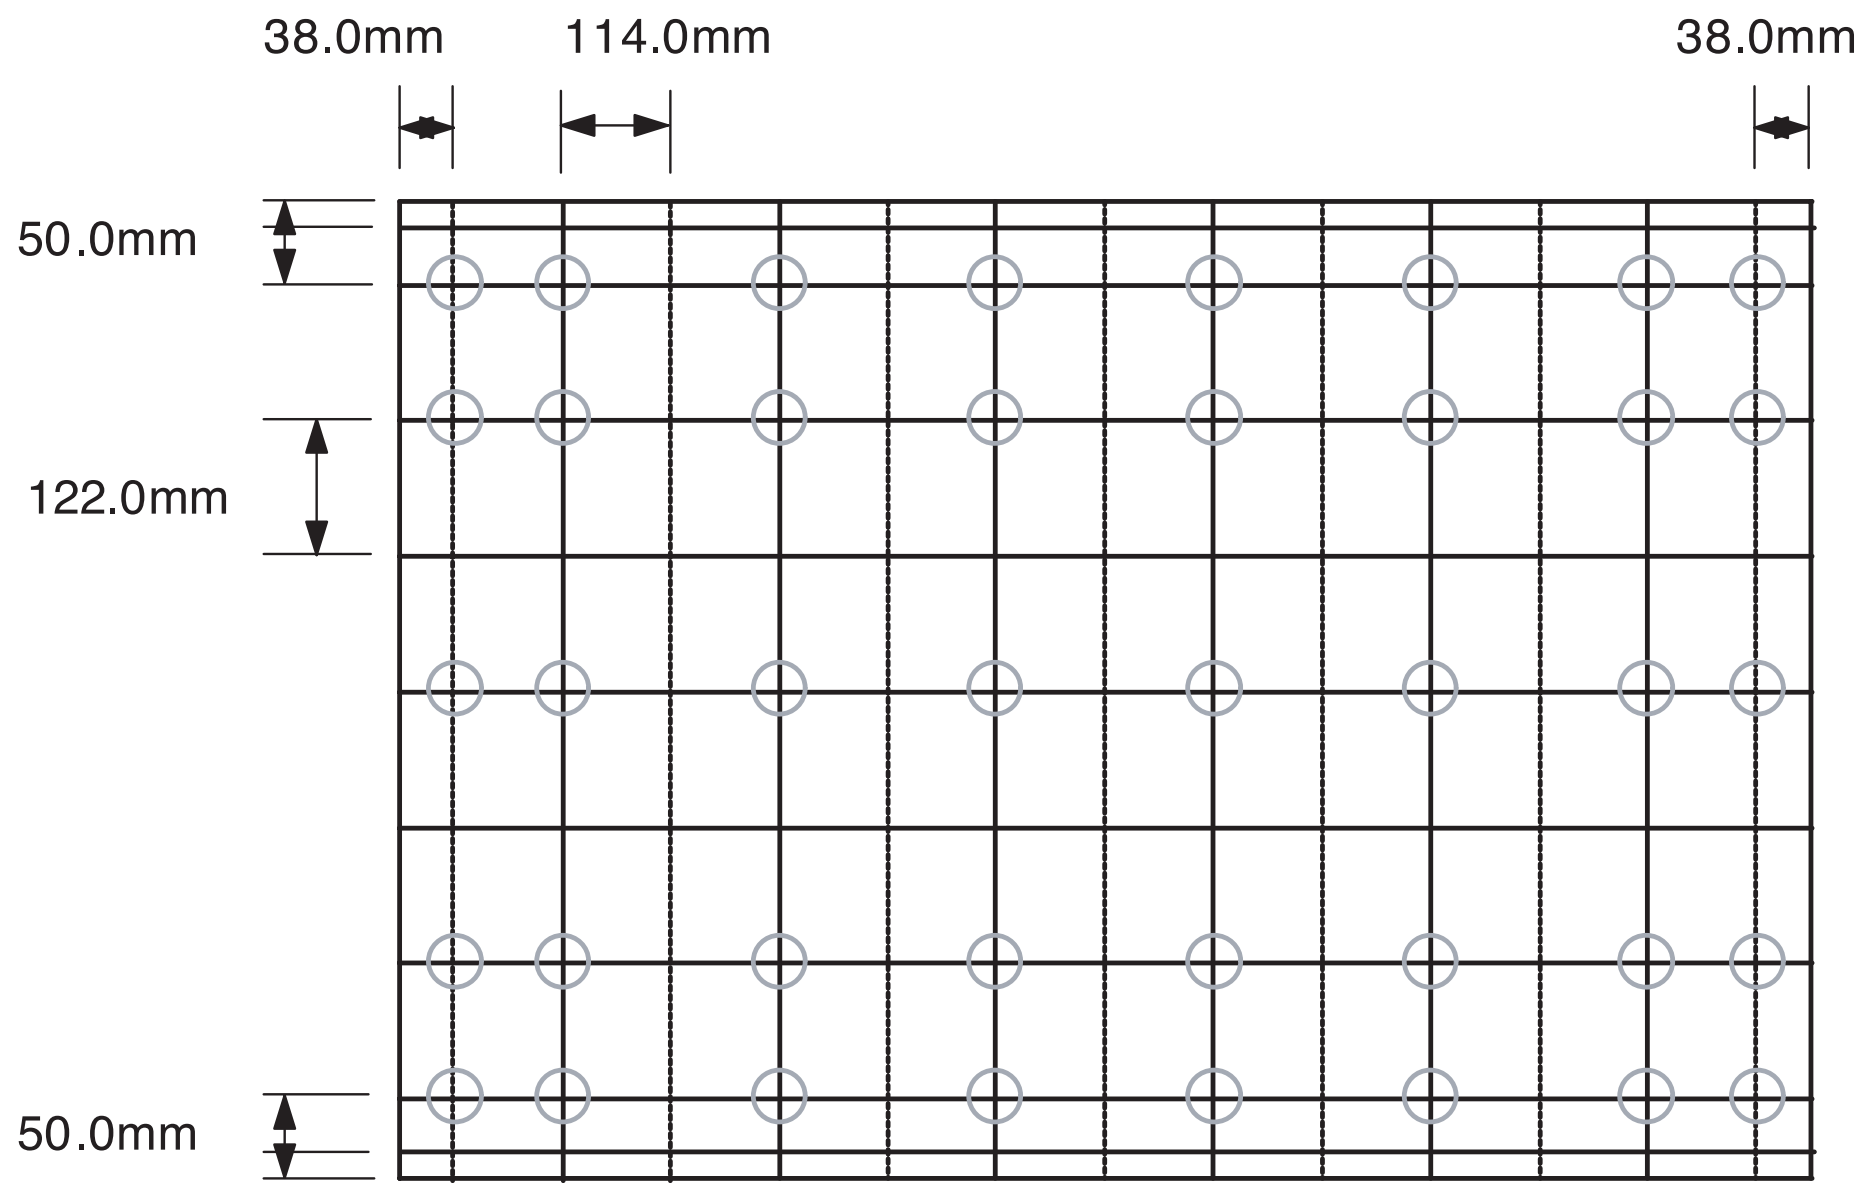

Note: "O" Cursor Point


4-6-10 652W/653W/6515R(DTV MODE)

Screen Size : X 1444, Y 832 (X:378=9*2+30*12, Y:488=40*2+68*6)

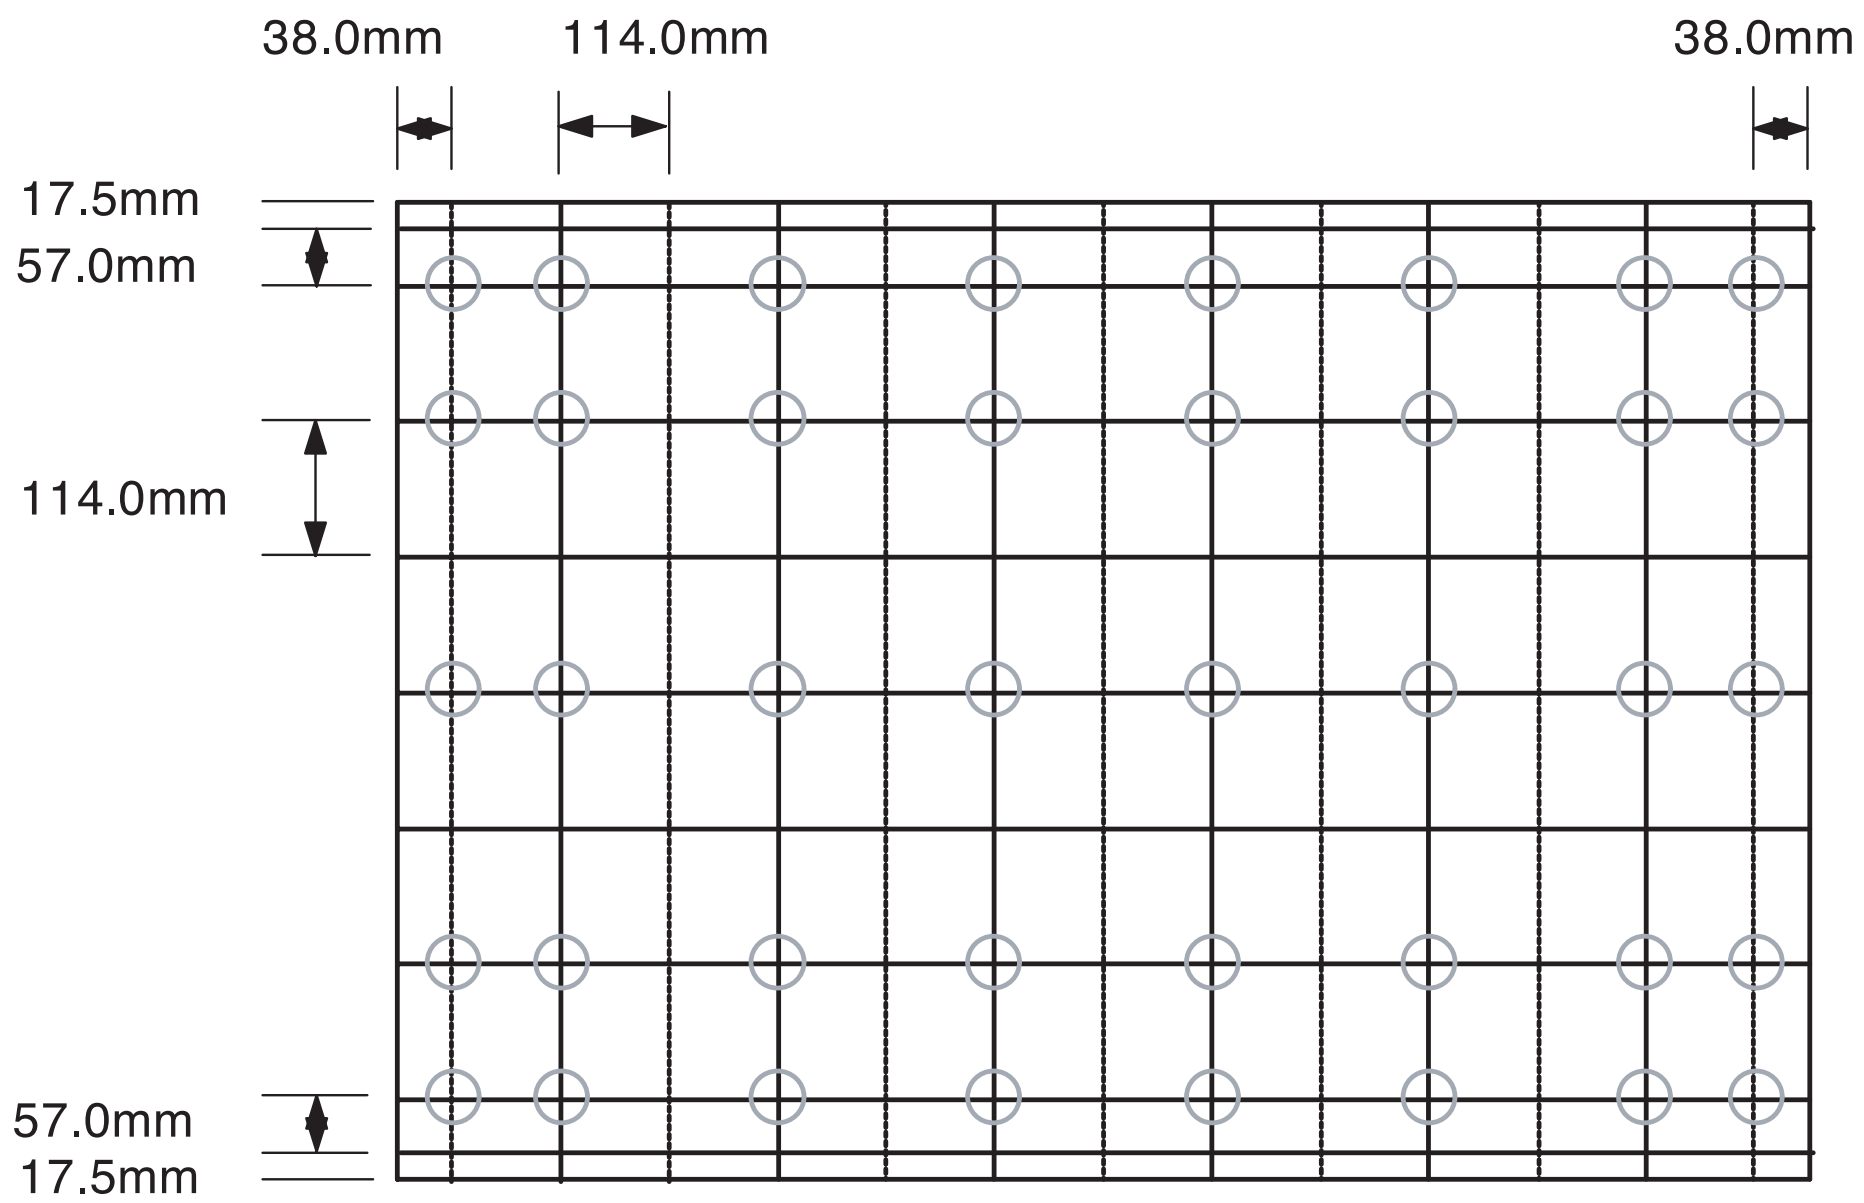

Note: "O" Cursor Point

4-7 Remote Control for Servicing (Convergence Mode)

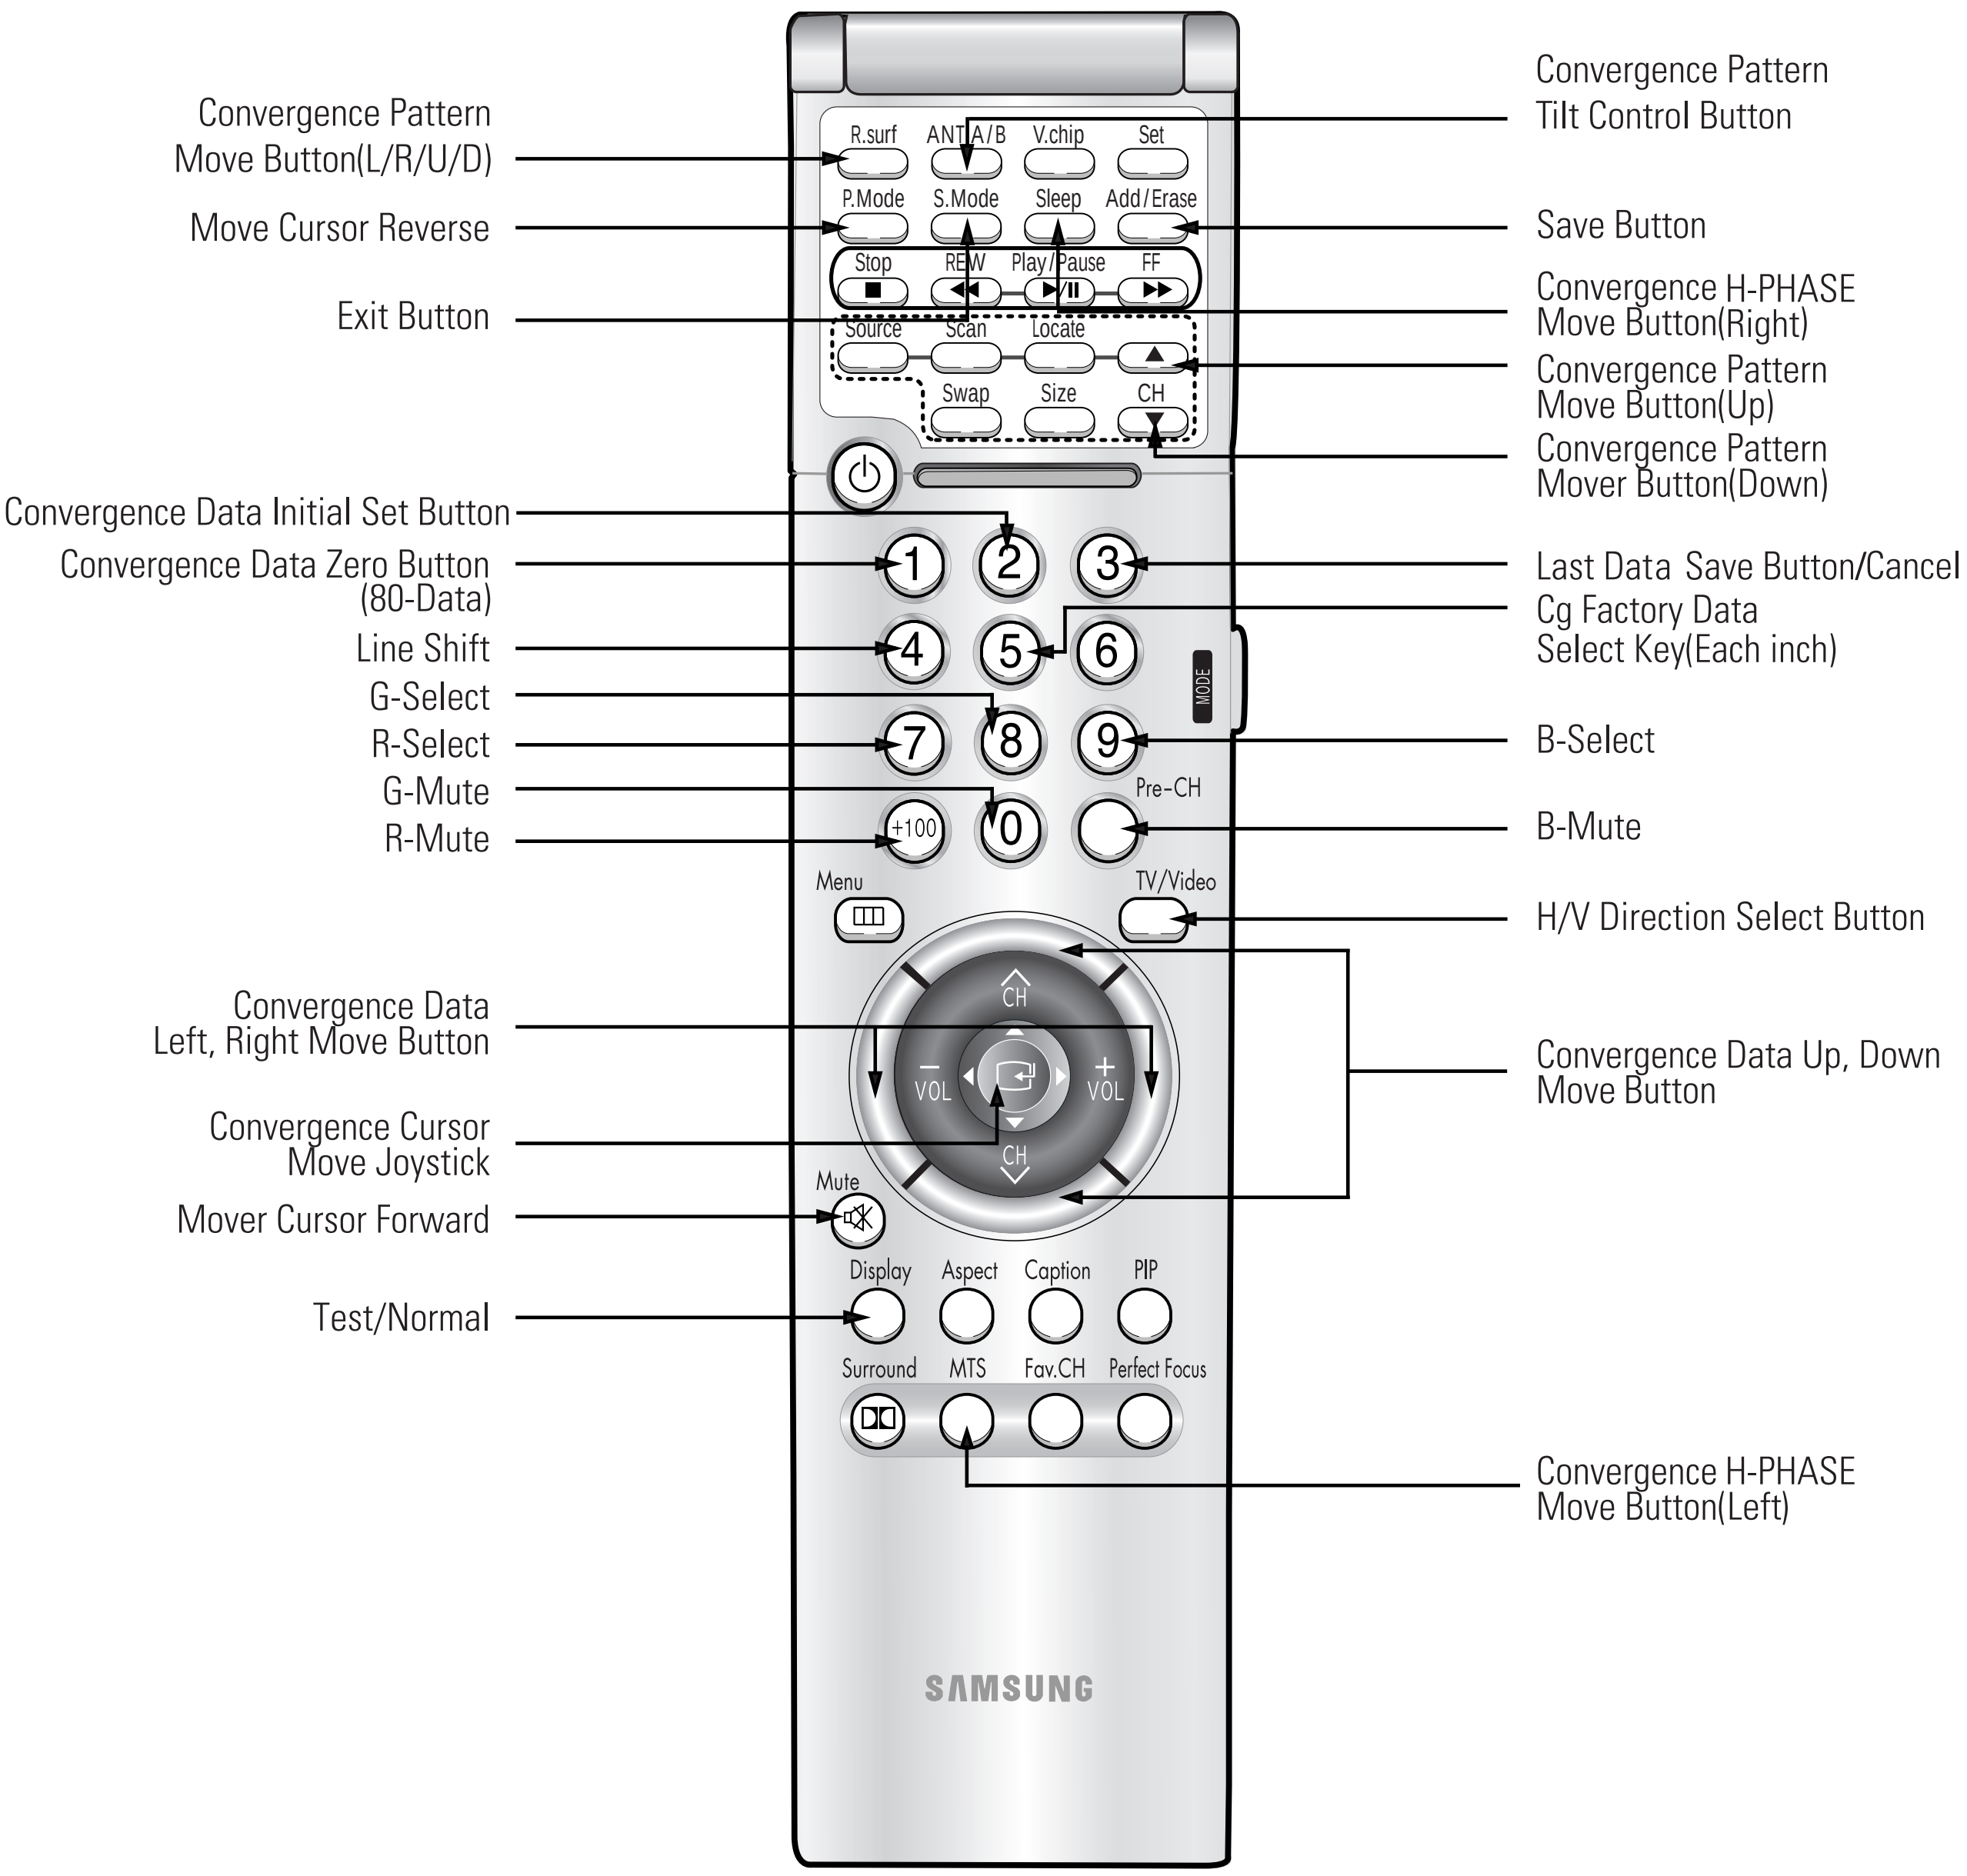

4-7-1 KEY Function

1. R-SELECT 7
   Press to select RED color.

2. G-SELECT 8
   Press to select GREEN color.

3. B-SELECT 9
   Press to select BLUE color.

4. R-MUTE +100
   Press to mute RED color.

5. G-MUTE 0
   Press to mute GREEN color.

6. B-MUTE Pre-CH
   Press to mute BLUE color.

7. CANCEL KEY 3
   Press to revert to the previous data during the Convergence Adjustment.

8. TEST / NORMAL Display
   Press to check TV mode in the Convergence Mode.

9. LINE SHIFT 4
   Press to move a line up / down or left / right.

10. FACTORY DATA SELECT BUTTON 2
    Press to call the factory default values.

11. H / V DIRECTION SELECT BUTTON TV/Video
    Press to switch the cursor direction horizontally or vertically.


12. SAVE BUTTON Add/Erase
    After the Convergence Adjustments are completed, press to save data.

13 EXIT BUTTON S.Mode
   After the Convergence adjustments are completed, press to exit to TV mode.

14. MOVE CURSOR FORWARD (Mute)
Press to move the cursor right or down.

15. MOVE CURSOR REVERSE (P.Mode)
Press to move the cursor left or up.

16. CONVERGENCE PICTURE MOVE BUTTON

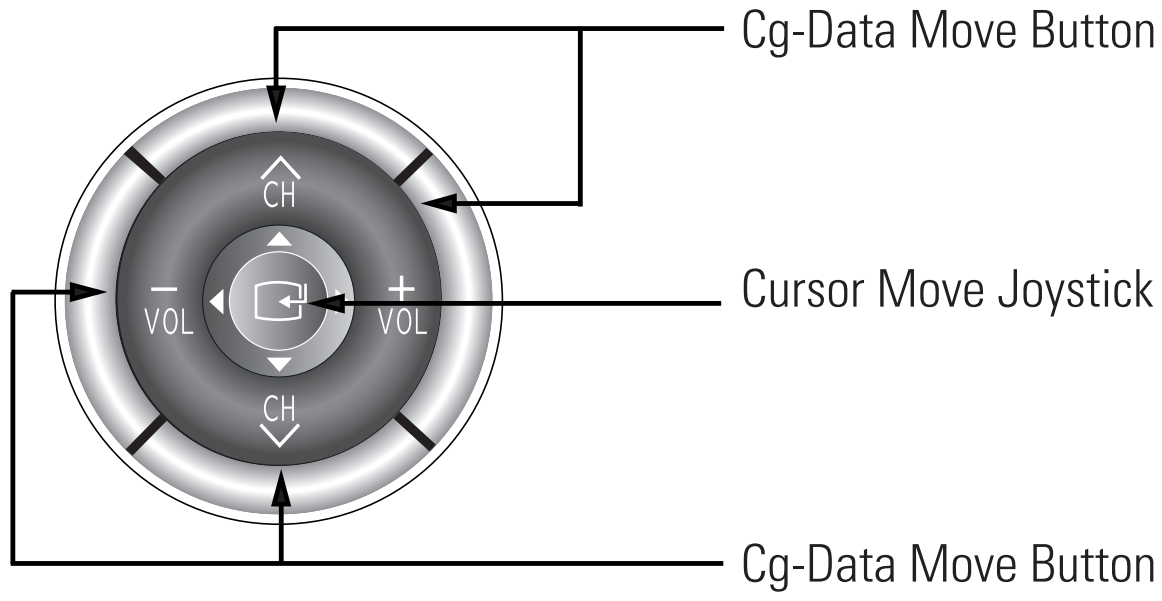

17. CONVERGENCE MOVE BUTTON
Press to move the convergence left (MTS) or right (Sleep) .

18. CONVERGENCE DATA ZERO BUTTON ①
Press to zero the convergence correction data.

19. INITIAL DATA SET BUTTON ②

Changes when applying Almighty-Cg, Module (How to extract the basic Cg Data)

Inch (Type)	Model Name	Basic Data	Screen Display	Discription
	Representative Model	Number after entring the Cg-Mode		
54″ (54J9)	PCL545R/ PCL5415R	5-545 (Press in regular order)	+ + + + +	White Cross on the background (white cross)
62″ (62J9)	PCL6215R	5-625 (Press in regular order)	+ + + + + +	
55″ (552W)	HCL552W/ 5515W	5-552 (Press in regular order)	○ ○ ○ ○ ○	White Oval on the background (white border)
65″ (652W)	HCL652W/ 6515W	5-652 (Press in regular order)	○ ○ ○ ○ ○ ○	White Oval on the background (white border)
47″ (472W) (473W)	HCL472W/ 4715W	5-473 (Press in regular order)	□ □ □ □	White Square on the backgrand (white border)
65″(653W)	HCM653W	5-653 (Press in regular order)	□ □ □ □ □ □	White Square on the backgrand (white border)
55″(553W)	HCM5525W/ 553W	5-553 (Press in regular order)	□ □ □ □ □	White Square on the backgrand (white border)

20. Move Convergence Pattern P54A Service Manual R.surf

    After pressing the R.surf button, use the Channel Up / Down and Volume + / - buttons to move the Convergence Pattern up / down / left / right.

21. Convergence Pattern Tilt Control Button ANT A/B

    After pressing the ANT A / B button, use the Channel Up / Down and Volume + / - buttons to create a tilt to the Convergence Pattern.

    NOTE Note : Use the following two buttons only when they are indispensable.

4-8 Convergence Adjustment

4-8-1 Convergence Adjustment)

NOTE **Special Notes**

/ A sensor is attached on the center of each side of the Convergence Mode pattern (see figure below). The sensors are required for normal Perfect Focus function.

/ Use a screen jig to do the convergence adjustments correctly (Especially, perform correct convergence adjustments on the center of each side where a sensor is located.)


/ Do the convergence adjustments correctly. Otherwise, any Perfect Focus error can happen.

1. Warm up the TV for a least 30 minutes.


2. Input an NTSC Signal.(Use an antenna or AV source.)

NOTE Make sure that deflection yoke are properly adjusted so that the center of Green, Red, Blue pattern is aligned on the center of screen jig.

3. Enter the Convergence Mode by Pressing the remote control keys in the following sequence:




NOTE If OSD displayed as shown in figure below, press the S.Mode key to exit.
Then, redo step 3 to enter the Convergence Mode.
After entering the Convergence Mode, Stand by for about five seconds before doing the adjustments.

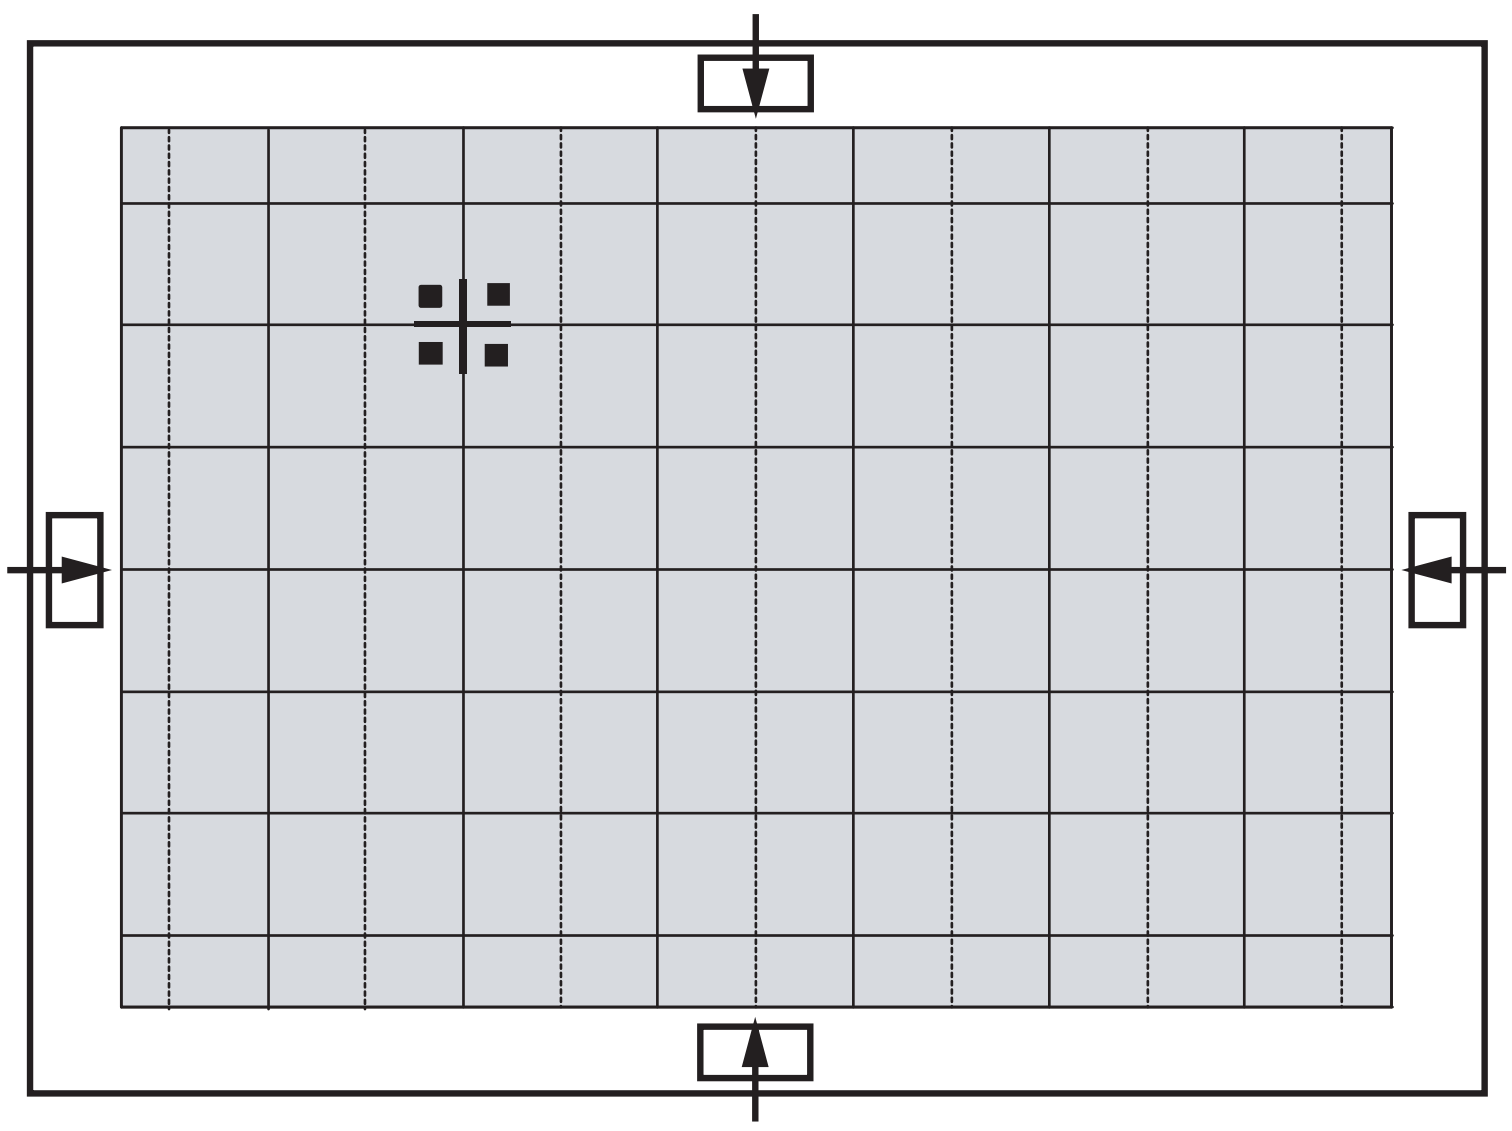

4. To adjust GREEN, first press the +100 and the Pre-CH keys, and then press the 8 key.




5. The TV/Video key moves the cursor horizontally or vertically.

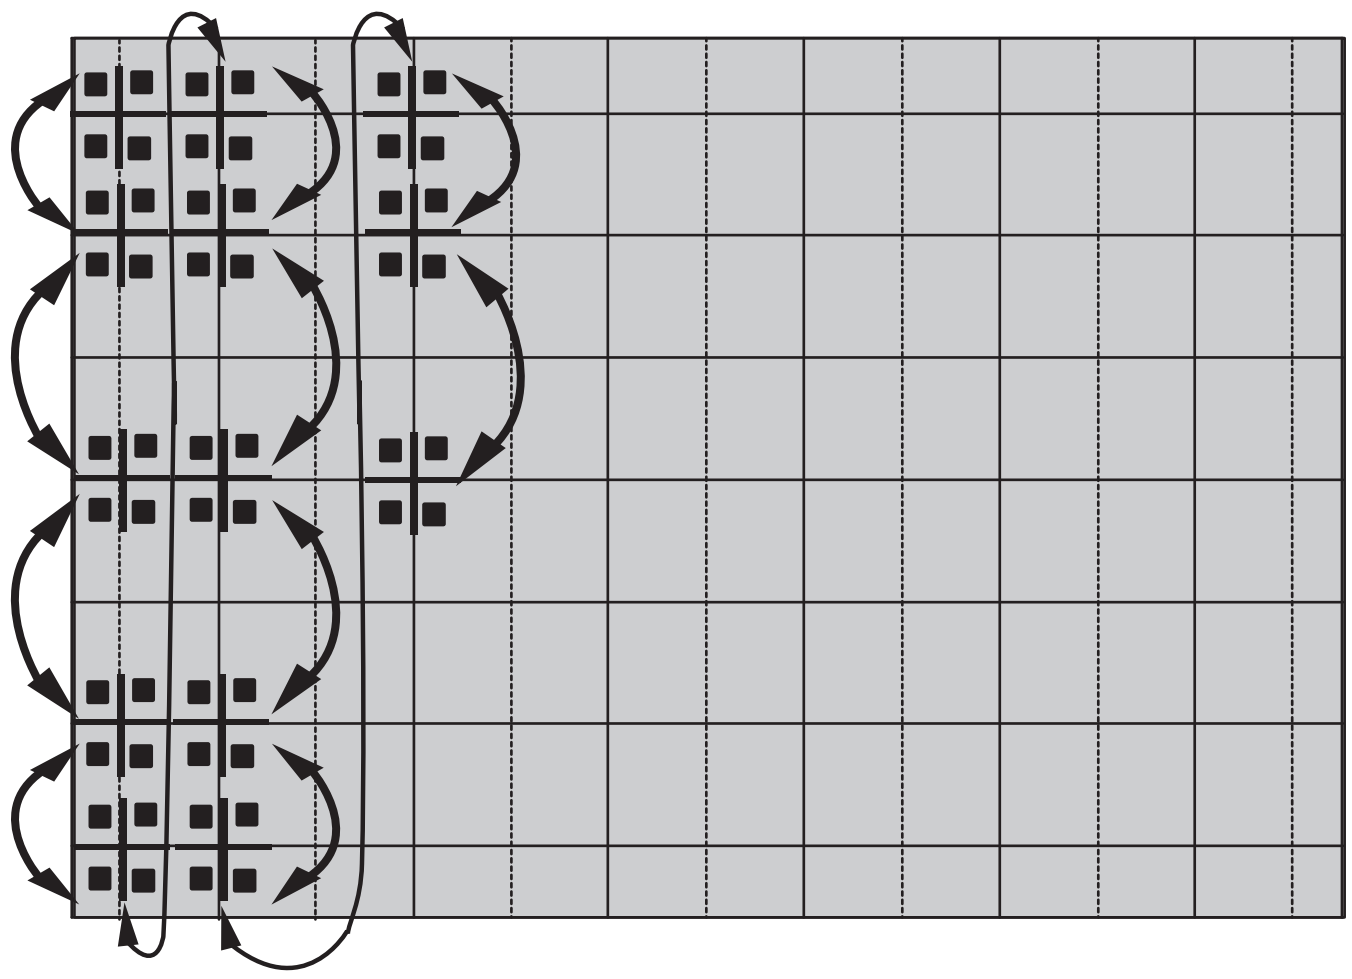


NOTE When the TV/Video key is pressed once again, the cursor moves horizontally.

6. The Mute key moves the cursor right, and the P.Mode key moves the cursor left.

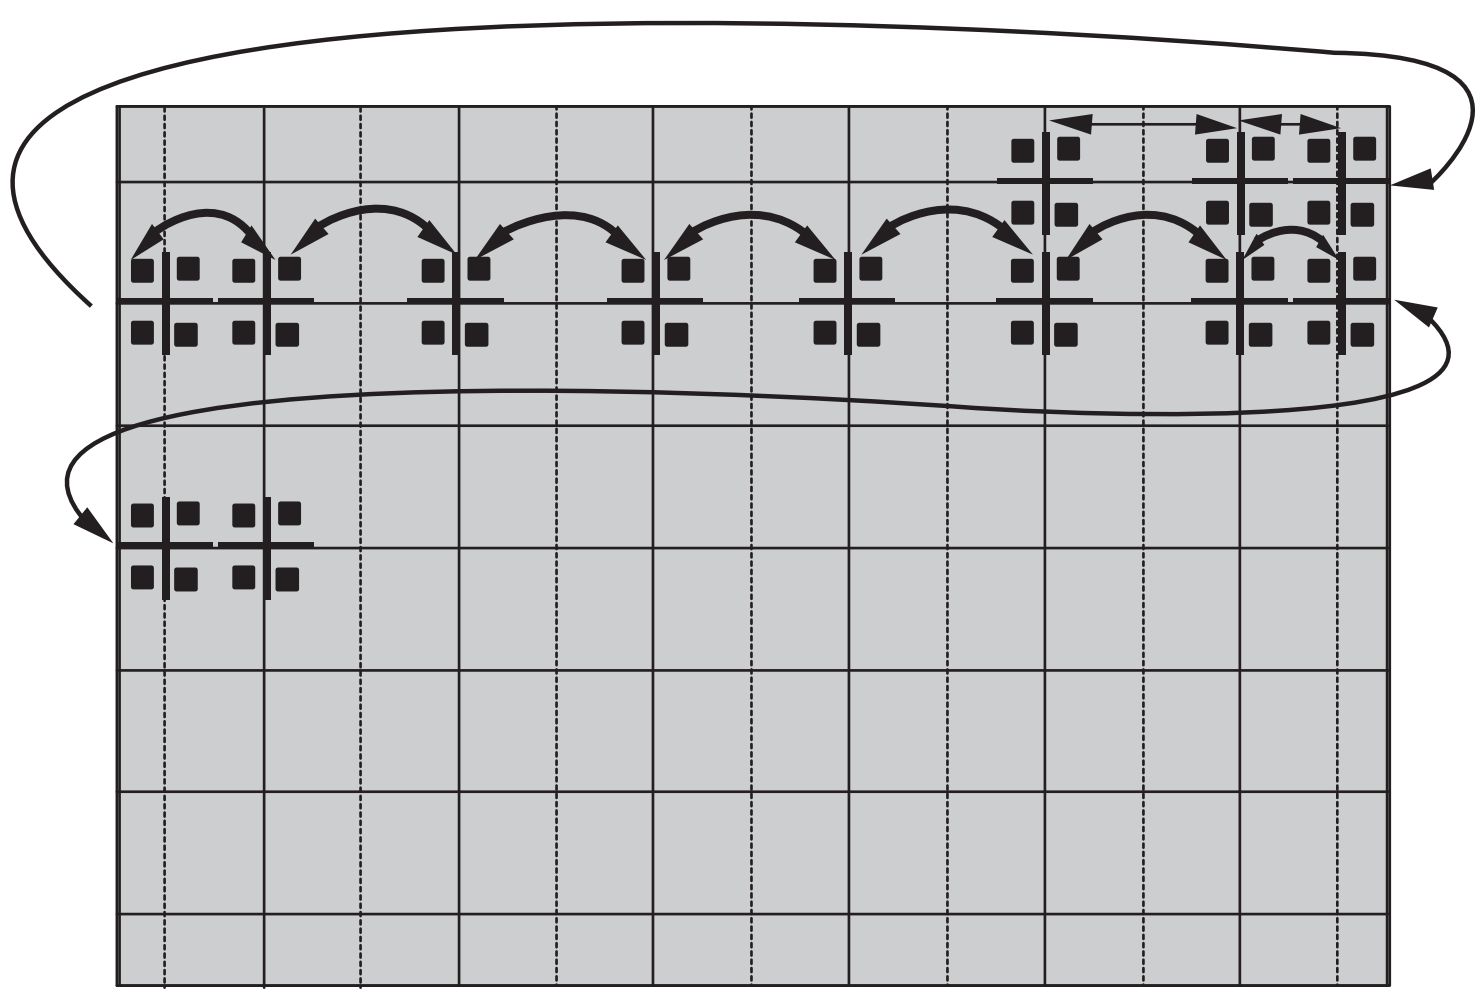


7. New Adjustment

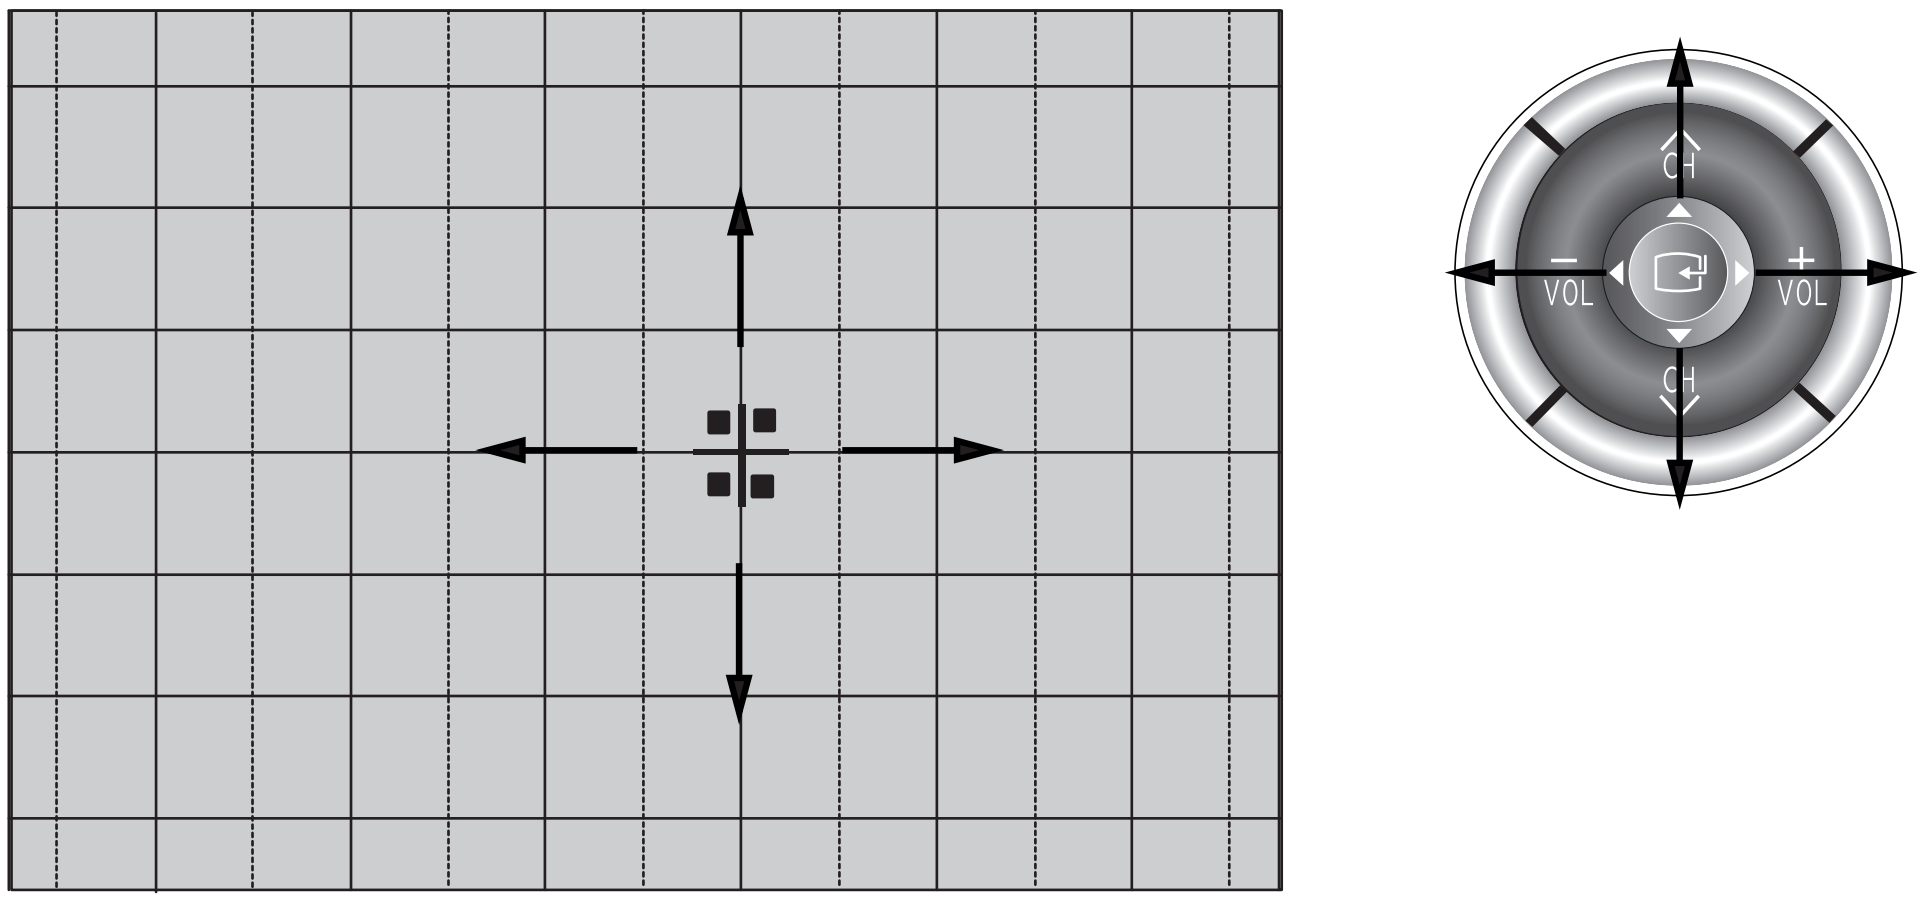

NOTE Use the joystick on the remote control(type: TM63) to move the cursor.
Move the joystick left/right/up/down to move the cursor left/right/up/down.

8. Use the (4) key for overall balance.

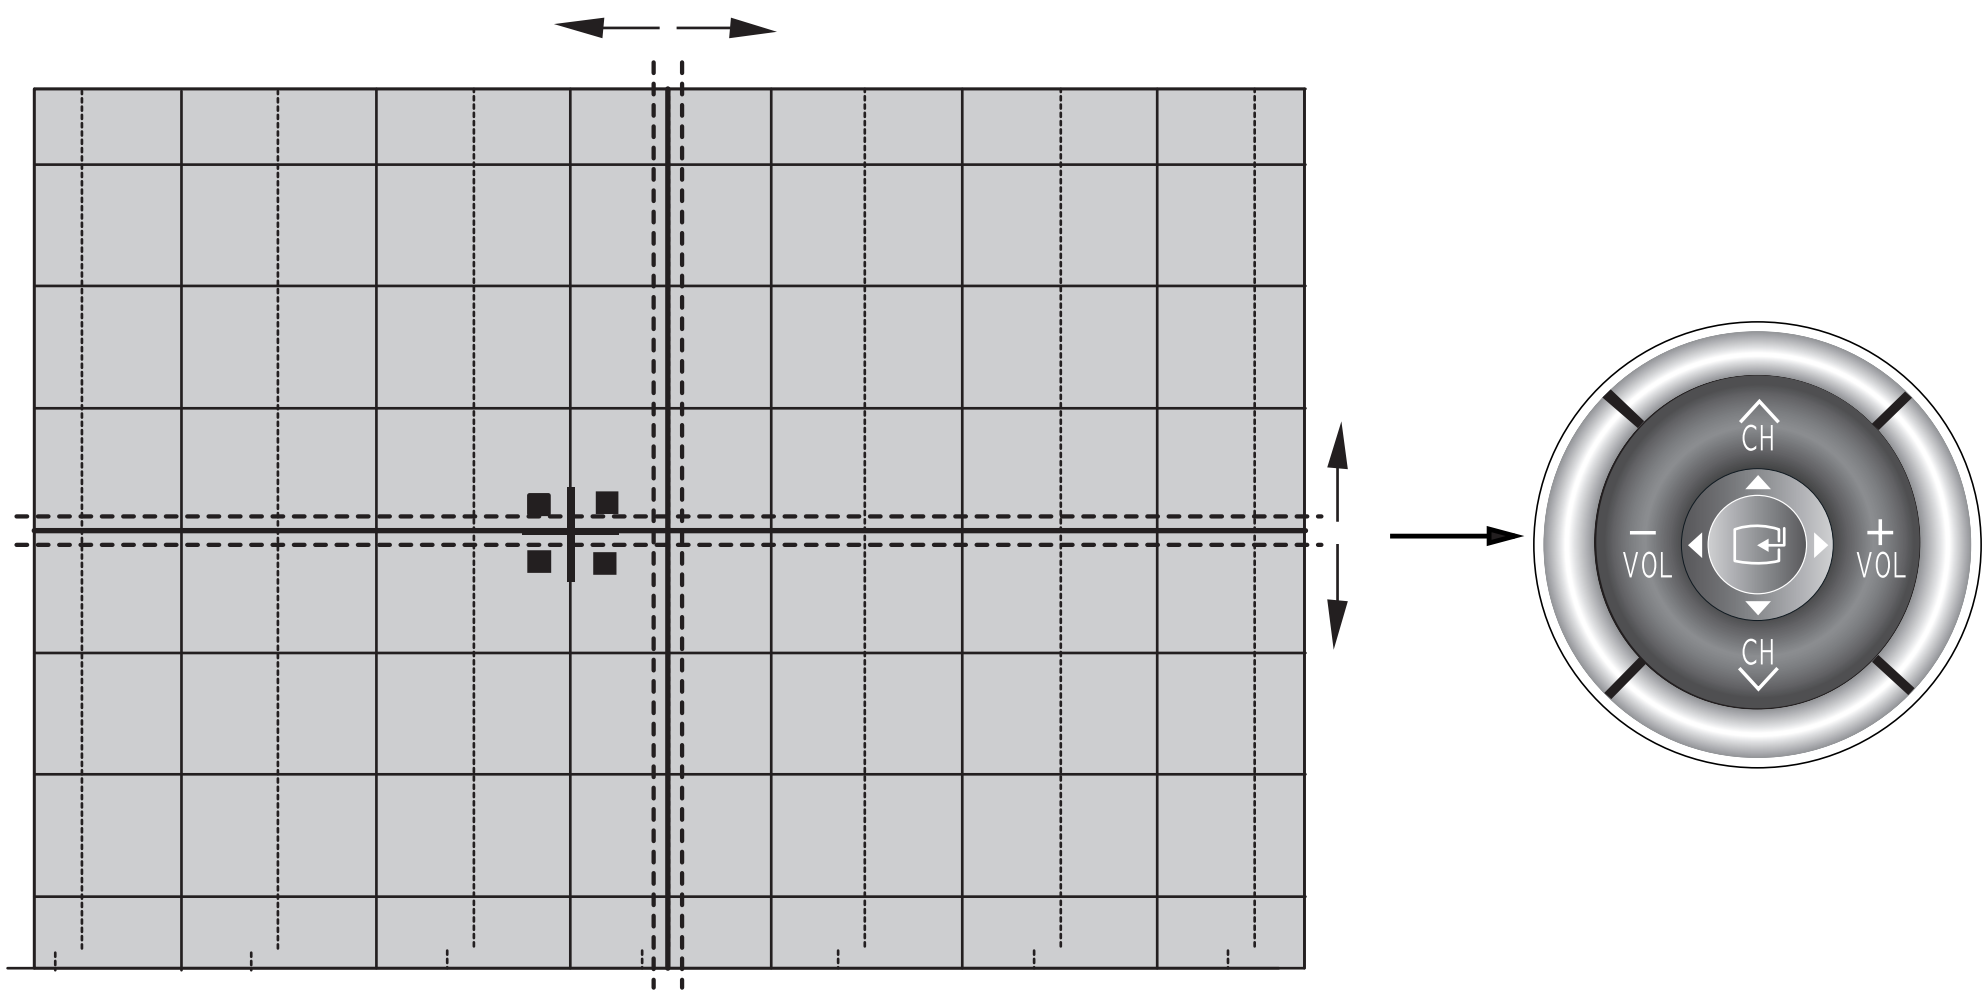


9. After the Line Shift is cancelled by pressing the (4) key, use the Channel and Volume keys (Up/Down) to make big adjustments.

10. After the green convergence adjustments are completed, press the Add/Erase key to save the data.

11. Superimpose the Red and Green colors by pressing the +100 and the 7 keys.

12. To adjust RED, redo steps 5~8.

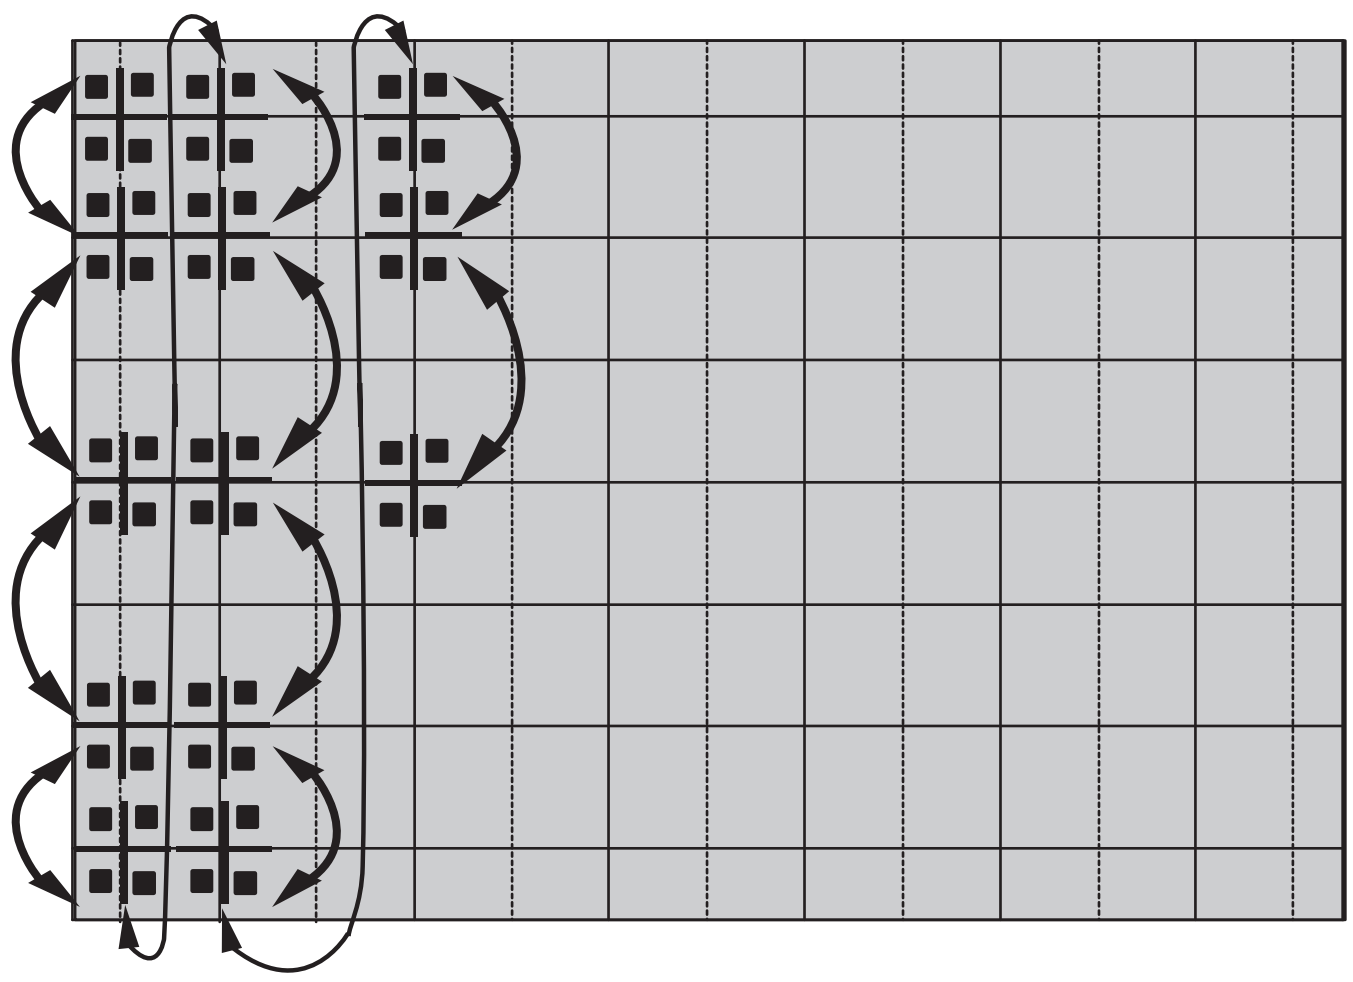

When the cursor moves vertically TV/Video


13. To superimpose the blue and green colors, press (1) the +100 key for R-Mute, (2) the Pre-CH key to cancel the B-Mute, and (3) the 9 key for B-select.

14. To adjust BLUE, redo steps 5 ~ 8, 12.

15. If any color is not properly adjusted when displaying the red, blue and green colors, readjust the color.

16. After the color adjustments are completed, press the (Add/Erase) key to save the data.


NOTE The cursor moves to center, and then automatically moves up and to the left about five seconds later.

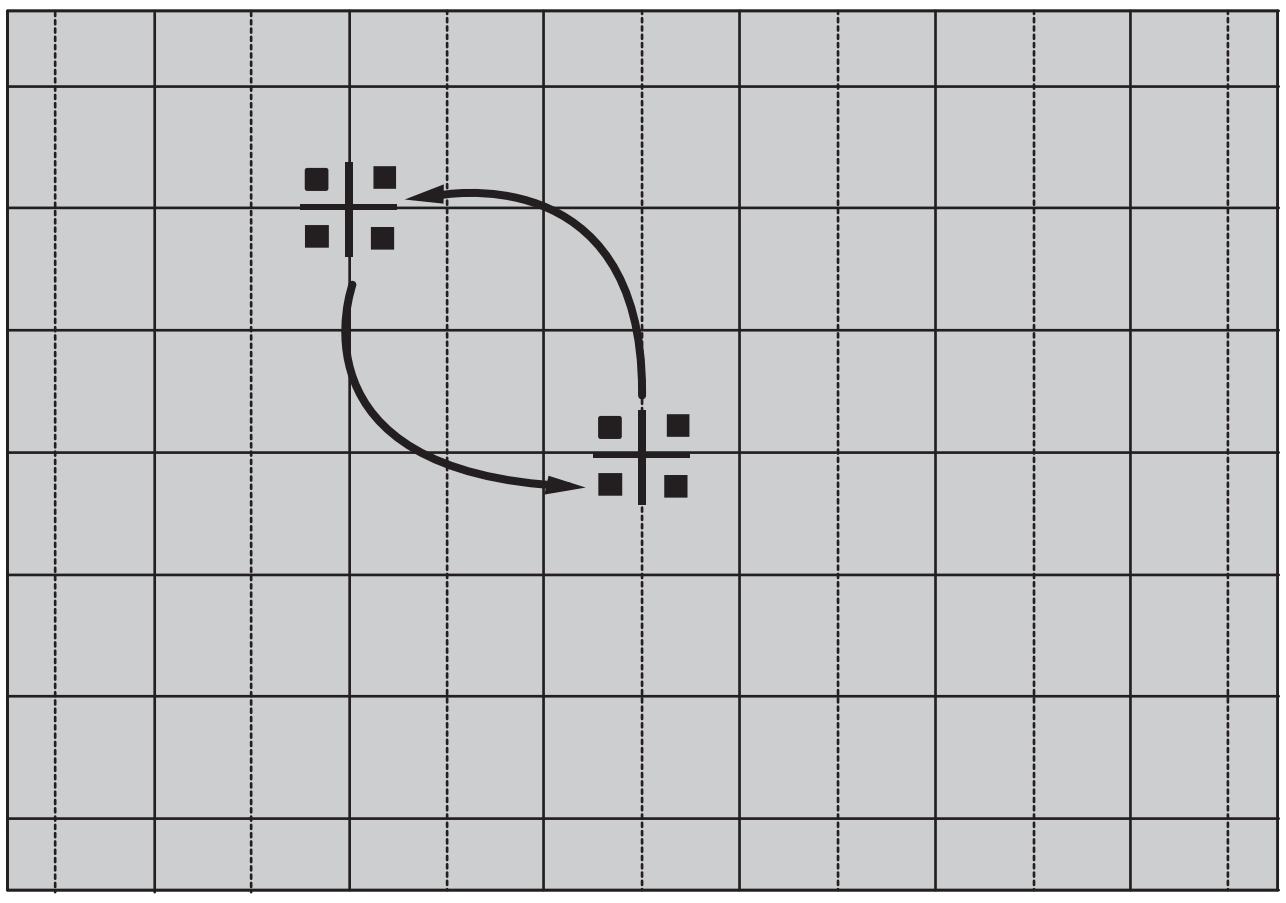

4-8-2 Perfect Focus (Factory Mode)

1. After the adjustment is completely saved, press the Perfect Focus key to perform Auto Convergence(Factory Mode). Auto Convergence is performed in the following sequences:

G ⟶ R ⟶ B
UP ⟶ LEFT ⟶ DOWN ⟶ RIGHT

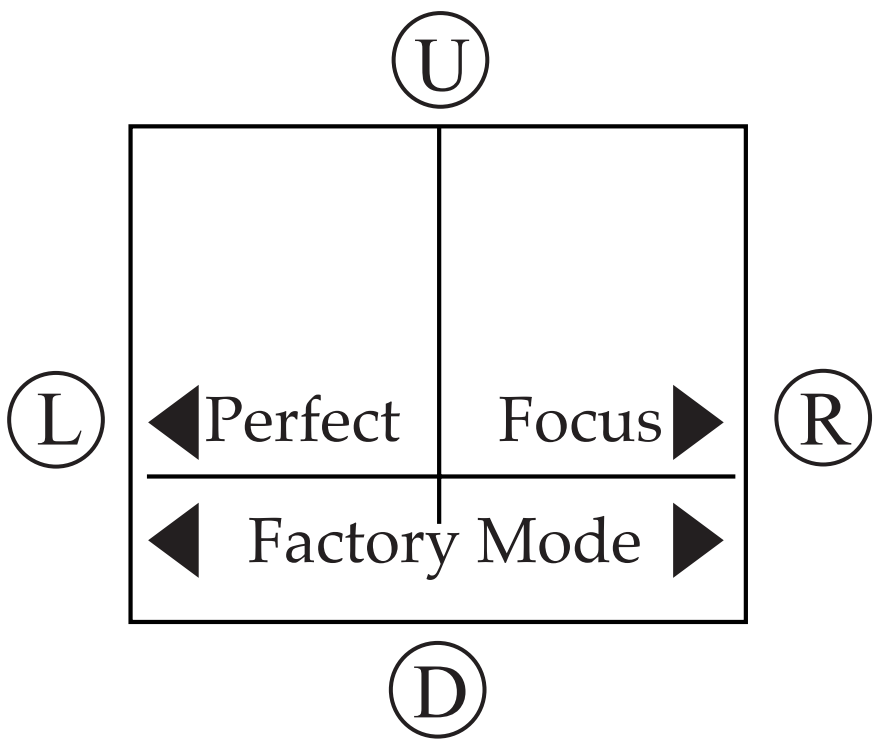

When Auto Convergence is complete, the data is automatically saved and the convergence pattern reverts.

NOTE
- After Factory Auto Convergence is complete, make sure that the cursor flickers for about 1 second on the center and then it is saved.
- Check the presence of error through the flicker of the cursor.
- When any error happens, be sure to re-do Factory Auto Convergence.
- When Convergence Adjustment is not normally done or the convergence center is misaligned with the sensing point, any adjustment error happens. Therefore, be sure to use a screen jig to correctly adjust during troubleshooting.

2 . After the Convergence Adjustments are completed, press the S.Mode key to exit.

3 . DTV Convergence Adjustment must be done same as the above Normal Mode Convergence Adjustment (Use a 16:9 screen jig for DTV)

4 . After DTV Convergence Adjustment is complete, do the following items for normal operation of Perfect Focus.

① Select a DTV mode (Pattern: Lion Head Pattern)

② Enter the Factory Mode to change OFS 0 → 1

③ Move the mode geometrically in V-Size increased.

④ Adjust VSO/VAO/VLO to change the value of V-Size/V-Shift offset.
(Vertical Size: 2.5~2:2.5~2/Horizontal Size: 5:5)

⑤ Re-change the OFS after all the adjustments are complete.
(OFS 1 → 0)

⑥ Exit the Factory Mode.

⑦ Enter the Convergence Adjustment Mode.

⑧ Press the Perfect Focus key.
(OSD: "Factory Mode")

⑨ If nothing is abnormal, then exit from the Convergence Adjustment Mode.

⑩ Re-do Perfect Focus in User Mode.
(OSD: "Mode ON")

⑪ If no error happens, complete Perfect Focus.


NOTE When Convergence Adjustment is not normally done or the convergence center is misaligned with the sensing point, any adjustment error happens. Therefore, be sure to use a screen jig to correctly adjust during troubleshooting.

4-8-3 Perfect Focus (User Mode)

1. Press the Perfect Focus button on the remote control or select Convergence from the menu.

2. Press the Menu button to exit (Available in only User mode).

Note : After adjustments 1~16 for each of R,G,B are complete, if the cursor flickers for a while at the center of screen while the figure of adjustment 8 is displayed, it means normal operation of Perfect Focus has been complete.

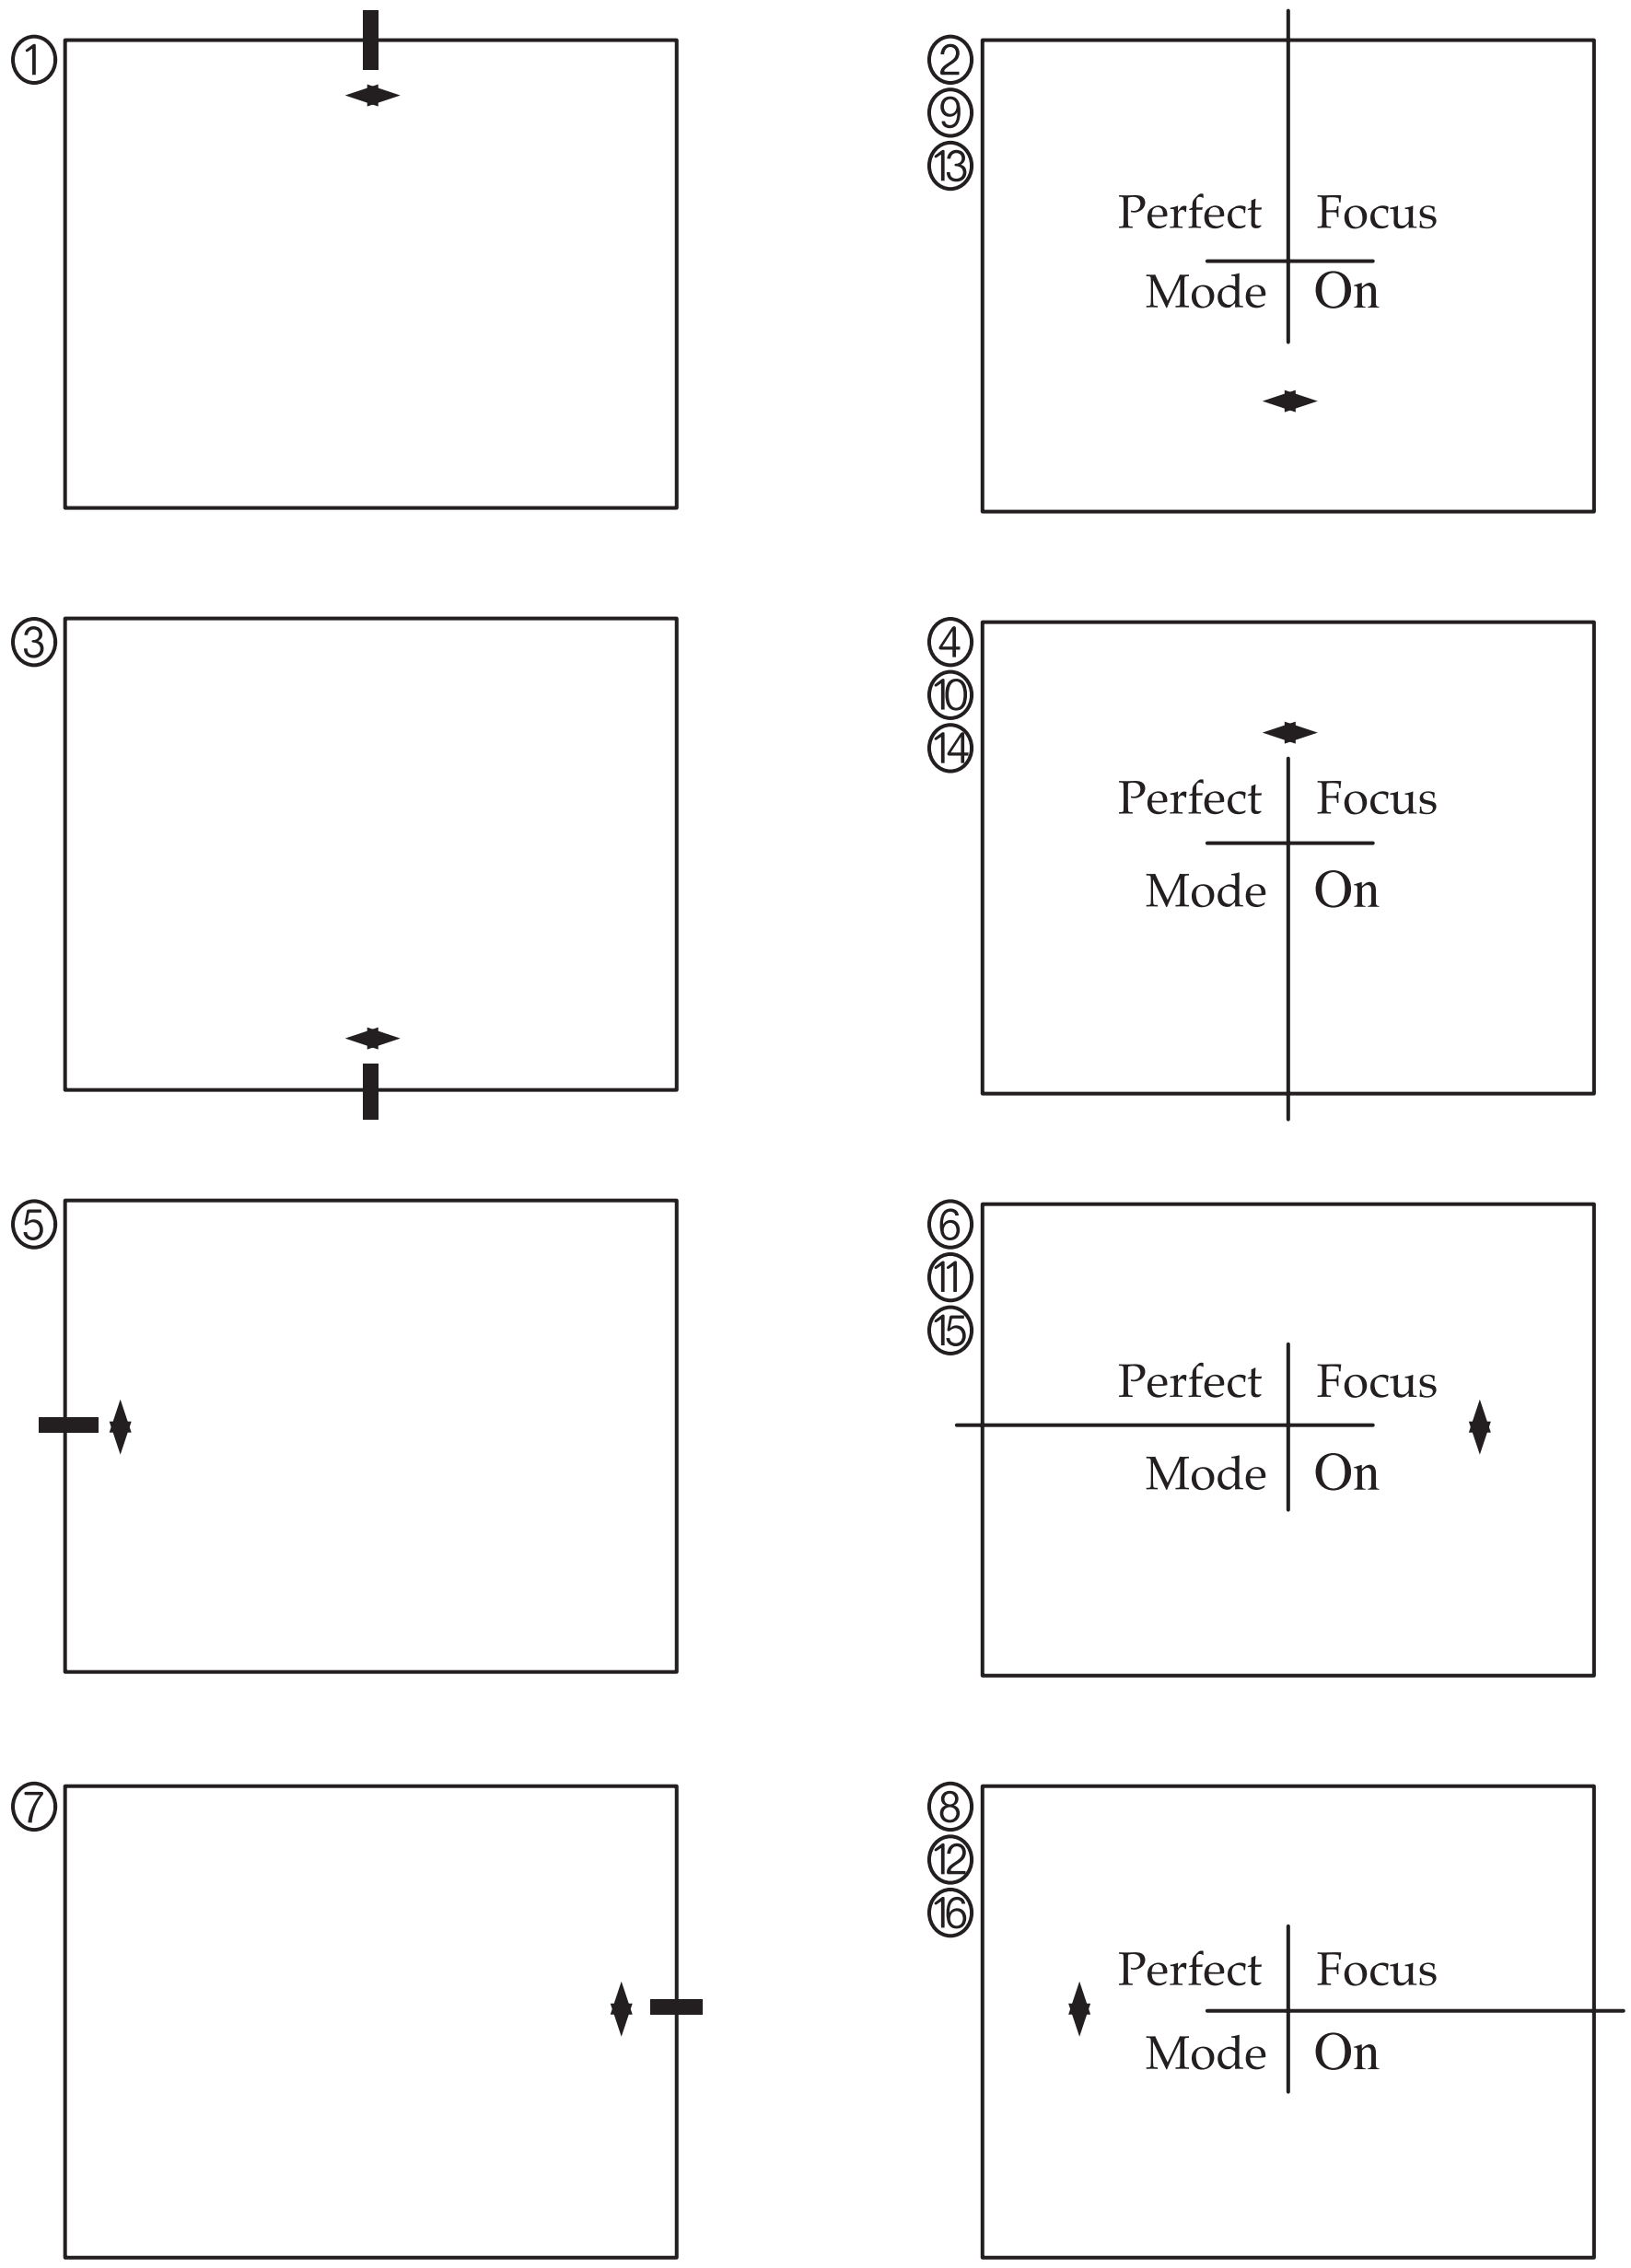

4-8-4 In / Out Voltage For Each Pin

	VCC	GND	CONVST	SCL	SDA	SIGNAL IN/OUT
MAX	+5V	0V	+5V	+5V	+5V	+5V
MIN	+5V	0V	0V	0V	0V	0V


4-8-5 Communication With Main Micom

D3	D2	D1	MODE	DIRECTION
0	1	0	AUTO Megnetic Field Standby Mode	MAIN → Cg
1	1	1	AUTO Megnetic Field Mode	MAIN → Cg
0	0	N/A	AUTO Megnetic Field Ends	Cg → MAIN
0	1	N/A	R DISPLAY	Cg → MAIN
1	0	N/A	B DISPLAY	Cg → MAIN
1	1	N/A	G DISPLAY	Cg → MAIN
N/A	N/A	0	AUTO Megnetic Field End Key In Entered	MAIN → Cg

NOTE : Main Micom operates within 50ms after a command is transmitted from Cg Micom.

4-9 MICOM and Pins Voltage

4-9-1 Pin Layout(Progressive)

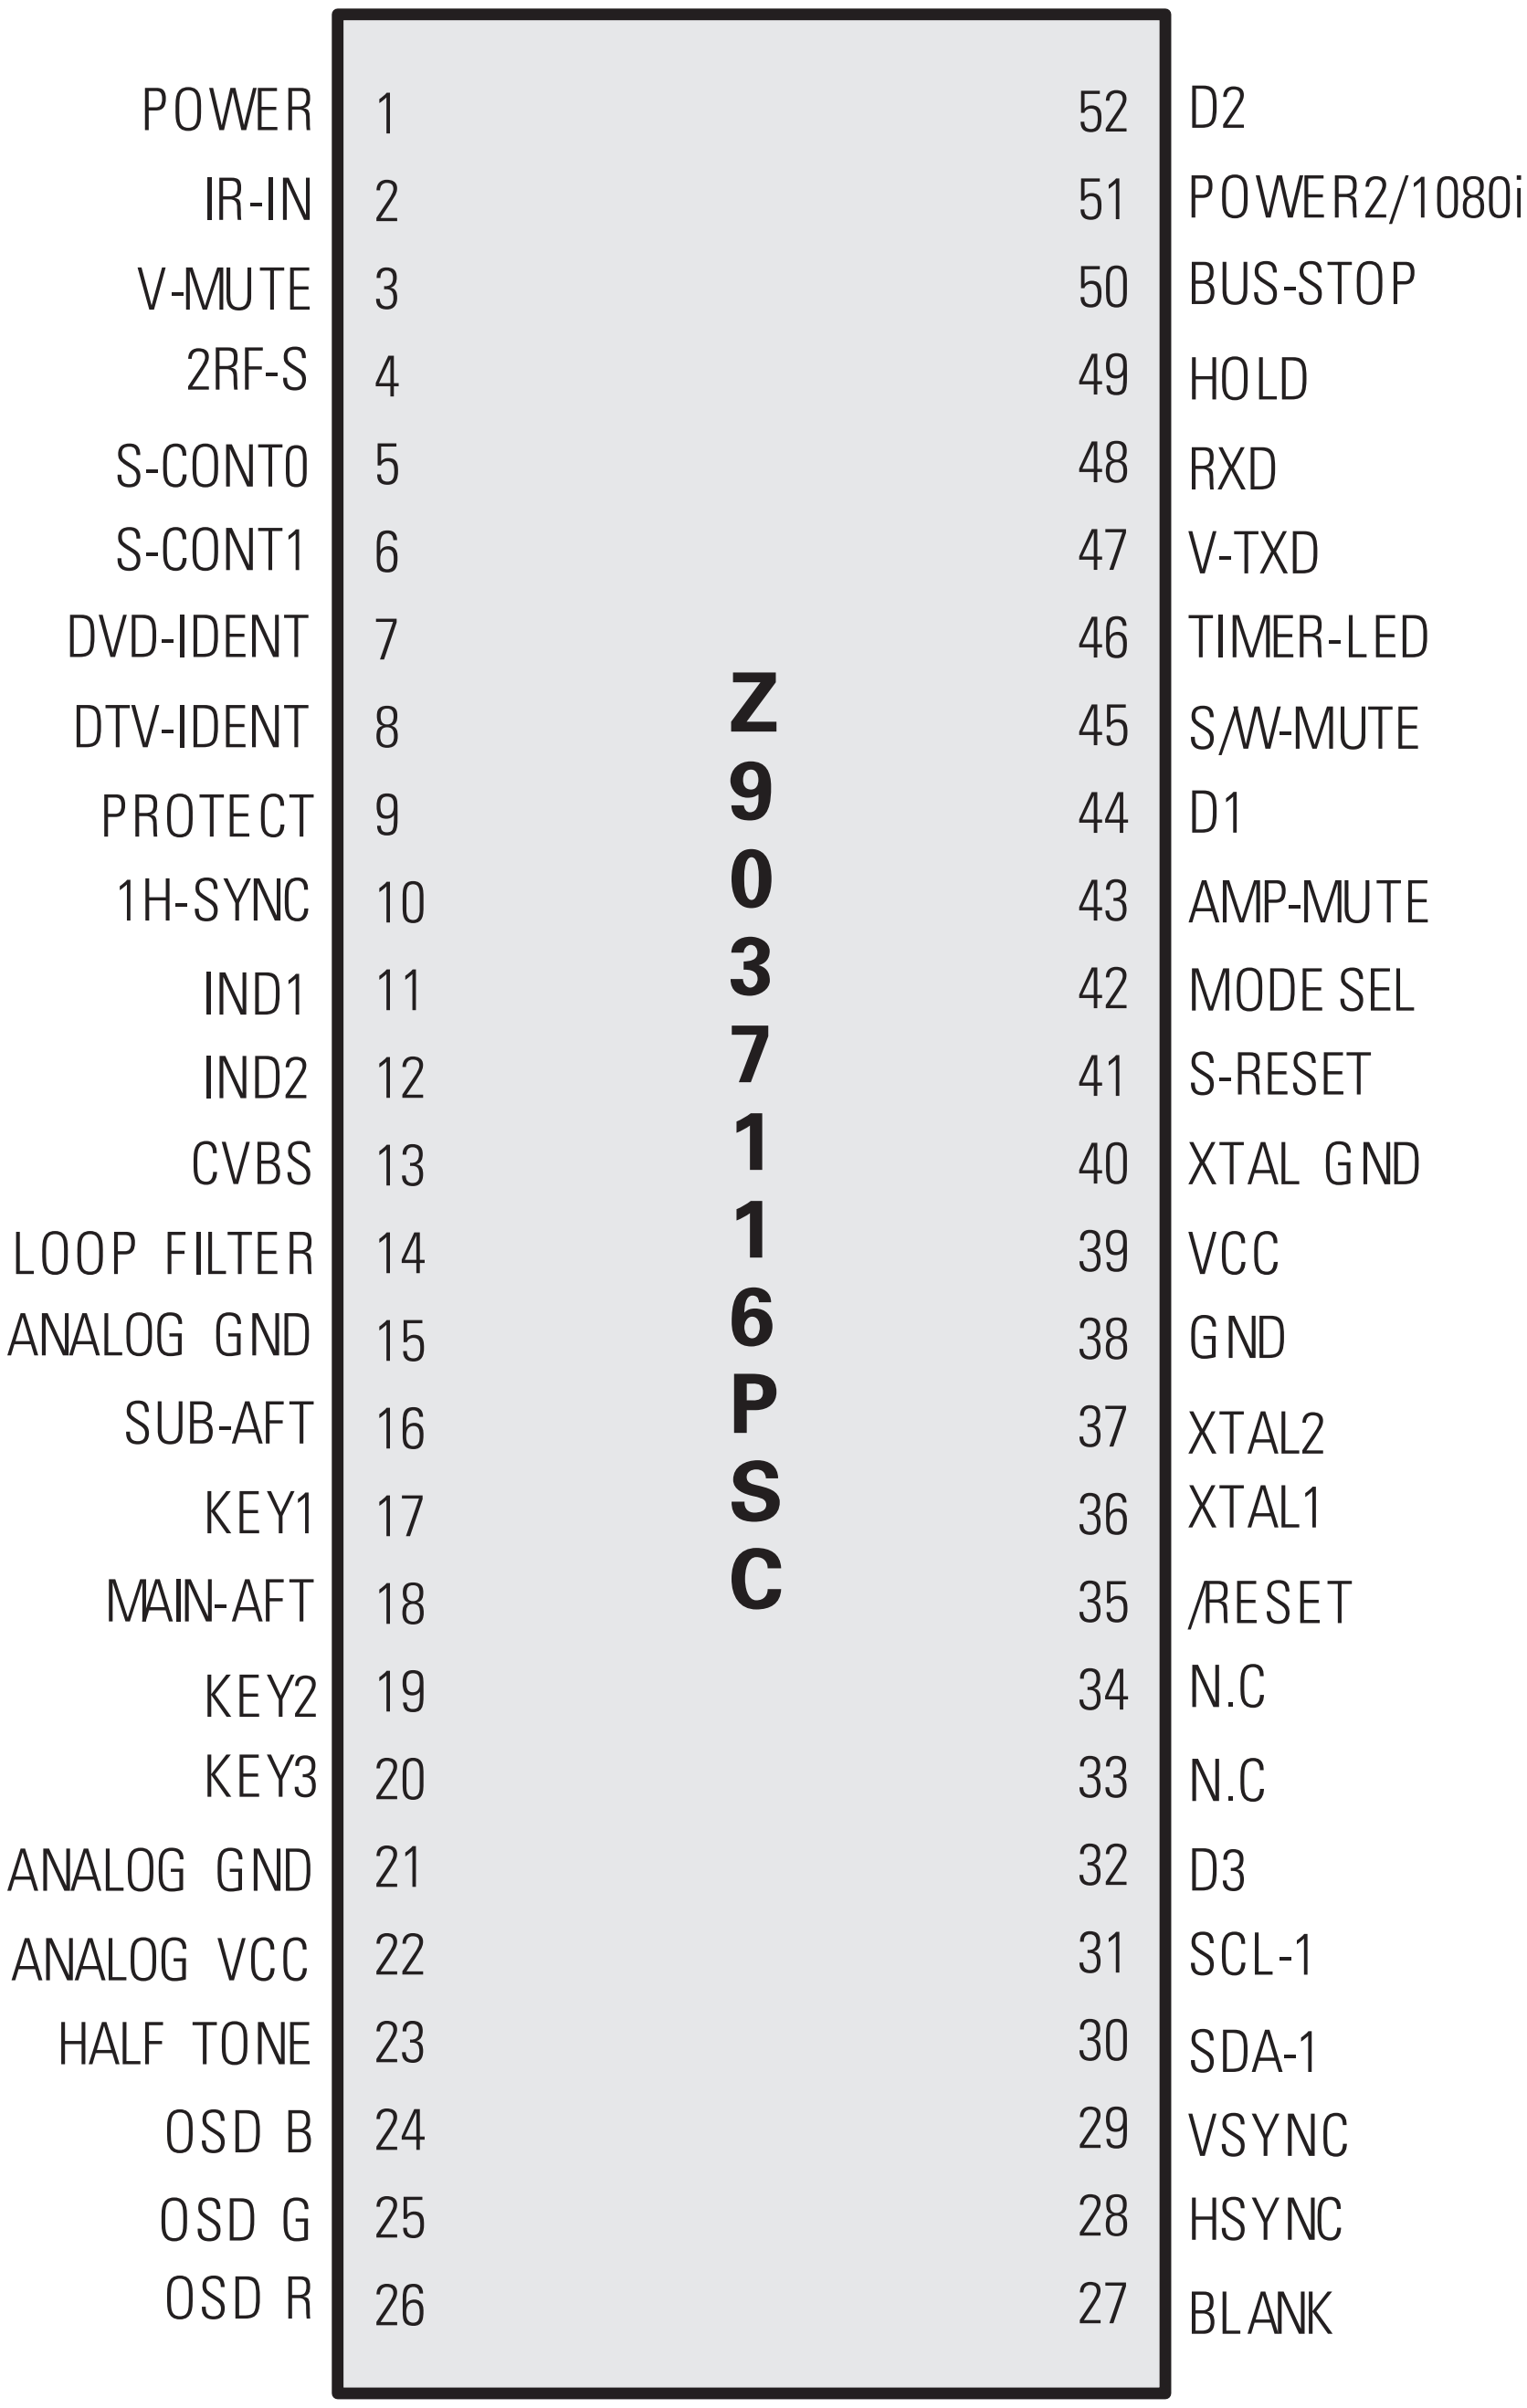

4-9-2 MICOM Pins(Progressive)

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	POWER	POWER ON/OFF RELAY CONTROL	L --> H
2	IR IN	REMOCON INPUT	5V
3	V-MUTE	VIDEO SIGNAL MUTE	3V
4	2RF-S	2RF-SWITCHING	5V
5	S-CONT0	SOUND MODE SELECT	5V
6	S-CONT1	SOUND MODE SELECT	5V
7	DVD-IDENT	DVD-IDENT	5V
8	DTV-IDENT	DTV-IDENT	-
9	PROTECT	PROTECT PORT	-
10	1H-SYNC	NORMAL H,V-SYNC	3.5V
11	IND1	CLOCK BUS LINE	4.5V
12	IND2	DATA BUS LINE	4.5V
13	CVBS	CVBS	1.7V
14	LOOP FILTER	LOOP FILTER	1.9V
15	ANALOG GND	GND	GND
16	SUB-AFT	SUB AUTO FINE TURNING CONTROL	2.64V
17	KEY 1	KEY SCAN 1	4.84V
18	MAIN-AFT	MAIN TUNER AFT	1.9V
19	KEY 2	KEY SCAN 2	-
20	KEY 3	KEY SCAN 3	-
21	ANALOG GND	GND	-
22	ANALOG VCC	VCC	5V
23	HALF TONE	SIGNAL FOR OSC-FREQUENCY OSD CONTROL	-
24	OSD B	ON SCREEN DISPLAY BLUE OUTPUT	-
25	OSD G	ON SCREEN DISPLAY GREEN OUTPUT	-
26	OSD R	ON SCREEN DISPLAY RED OUTPUT	-

PIN NO.	ITEM	FUNCTION	OUT VOLT
27	BLANK	BLAKING SIGNAL OUTPUT	-
28	HSYNC	HORIZONTAL SYNC INPUT	-
29	VSYNC	VERTICAL SYNC INPUT	-
30	SDA-1	DATA BUS LINE	4.5V
31	SCL-1	CLOCK BUS LINE	4.12V
32	D3	CONVERGENCE D3	-
33	N.C	N.C	-
34	N.C	N.C	-
35	/RESET	RESET	4.74V
36	XTAL1	XTAL 1	1.72V
37	XTAL2	XTAL 2	2.2V
38	GND	GND	-
39	VCC	VCC	5V
40	XTAL GND	GND	-
41	S-RESET	SOUND RESET	-
42	MODE SELECT	DVD MODE SELECT(480i/480p)	5V
43	AMP-MUTE	MAIN AMP MUTE	-
44	D1	CONVERGENCE D1	-
45	S/W-MUTE	SWITCH MUTE (NOT USED)	-
46	TIMER-LED	TIMER LED	4.7V
47	V-TXD	-	4.6V
48	RXD	-	4.6V
49	HOLD	HOLD	4.65V
50	BUS-STOP	I^2C BUS STOP	5V
51	POWER2/1080i	1080i RELAY CONTROL	4.65V
52	D2	CONVERGENCE D2	-

4-9-3 Proscan Module (Progressive)

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	SCP		-
2	EW	EAST WEST OUT	2.2V
3	V-BLK	V-BLANKING	-
4	ABL	ABL INPUT	2.15V
5	AD-	VERTICAL DRIVE(-VOLTAGE)	2.95V
6	AD+	VERTICAL DRIVE(+VOLTAGE)	2.90V
7	H-BLK	H-BLANKING INPUT	-
8	HD	H-DRIVE OUT	1.6V
9	GND	GND	GND
10	PIP-RF		-
11	PIP-C		-
12	PIP-V/Y		-
13	GND	GND	GND
14	CVBS-Y		-
15	CHR	CHROMA	-
16	GND	GND	GND
17	Pr/R	Pr/R INPUT	2.0V
18	Y/G	Y/G INPUT	2.0V
19	Pb/B	Pb/B INPUT	2.0V
20	FB	FAST BLANKING INPUT	0.25V
21	GND	GND	-
22	HC	5V INPUT	-
23	VS1	VS1 INPUT	-
24	GND	GND	-
25	SDA	SERIAL DATA LINE	4.7V
26	SCL	SERIAL CLOCK LINE	4.8V
27	5V	5V	5V
28	27M	OPTION	-
29	GND	GND	GND
30	5V-	5V-	5V-

PIN NO.	ITEM	FUNCTION	OUT VOLT
31	H-OUT	HORIZENTAL-OUT	N.C
32	V-OUT	VERTICAL-OUT	N.C
33	GND	GND GND	
34	R-OUT	R-OUT	-
35	G-OUT	G-OUT	-
36	B-OUT	B-OUT	-
37	GND	GND	GND
38	IK	IK OUT	3.65V
39	GND	SPOT OUT	-
40	GND	GND	GND
41	VM-Y	VM-Y OUT	5.42V
42	YD	N.C	-
43	GND	GND	GND
44	CG-SYND	CG-SYNC INPUT	-
45	CG-B	CG-B INPUT	-
46	CG-G	CG-G INPUT	-
47	CG-R	CG-R INPUT	-
48	GND	GND	GND
49	PC-R	N.C	-
50	PC-G	N.C	-
51	PC-B	N.C	-
52	PC-H	GND	GND
53	PC-V	OSD-R INPUT	-
54	GND	OSD-G INPUT	-
55	OSD-R	OSD-B INPUT	-
56	OSD-G	BLANK(MICOM OUT)	-
57	OSD-B	HALF TONE INPUT	-
58	YS/YM	VIDEO MUTE (V-CHIP ON)	4.72V
59	YS/YM	GND	GND
60	GND	9V	9V

PIN NO.	ITEM	FUNCTION	OUT VOLT
61	9V	D-Pr INPUT	-
62	HD-Pr	D-Y INPUT	-
63	HD-Y	D-Pb INPUT	-
64	HD-Pb	N.C	-

4-9-4 3D/COMB Module

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	VIDEO	MAIN VIDEO INPUT	2.74V
2	GND	GND	GND
3	9V	9V INPUT	9V
4	GND	GND	GND
5	SCL	SERIAL CLOCK LINE	4.1V
6	SDA	SERIAL DATA LINE	4.1V
7	V-3D	COPY GUARD REJECT SIGNAL	3.8V
8	5V	5V INPUT	5V
9	Y-OUT	MAIN Y OUT	-
10	GND	GND	GND
11	C-OUT	MAIN C OUT	-
12	GND	GND	GND

4-9-5 Sound Module

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	GND	GND	GND
2	GND	GND	GND
3	GND	GND	GND
4	S-RESET	SOUND RESET	-
5	MAIN-L	MAIN LEFT OUT	-
6	GND	GND	GND
7	GND	GND	GND
8	5V	5V	5V
9	MAIN-R	MAIN RIGHT OUT	-
10	GND	GND	GND
11	GND	GND	GND
12	GND	GND	GND
13	8V	8V	8V
14	SCL-1	SERIAL CLOCK LINE	-
15	GND	GND	GND
16	SDA-1	SERIAL DATA LINE	-
17	CENTER	CENTER OUT	-
18	GND	GND	GND
19	GND	GNAD	GND
20	12V	12V	12V
21	SURROUND	SURROUND OUT	-
22	GND	GND	GND
23	GND	GND	GND
24	S-F1	S-F1(ANT1)	-
25	GND	GND	GND
26	GND	GND	GND
27	AV4-L-IN	AV4 LEFT INPUT	-
28	A-MONO-IN	A-MONO INPUT	-
29	GND	GND	GND
30	GND	GND	GND

PIN NO.	ITEM	FUNCTION	OUT VOLT
31	AV4-R-IN	AV4 RIGHT INPUT	-
32	S-F2	S-F2(ANT2)	-
33	GND	GND	GND
34	GND	GND	GND
35	GND	GND	GND
36	GND	GND	GND
37	EXT-L-IN	EXTERNAL LEFT INPUT	-
38	H-PHONE-L	HEADPHONE LEFT OUT	-
39	GND	GND	GND
40	GND	GND	GND
41	EXT-R-IN	EXTERNAL RIGHT INPUT	-
42	H-PHONE-R	HEADPHONE RIGHT OUT	-
43	GND	GND	GND
44	GND	GND	GND
45	GND	GND	GND
46	GND	GND	GND
47	AV2-L-IN	AV2 LEFT INPUT	-
48	MONITOR-L	MONITOR OUT	-
49	GND	GND	GND
50	GND	GND	GND
51	AV2-R-IN	AV2 RIGHT INPUT	-
52	MONITOR-R	MONITOR OUT	-
53	GND	GND	GND
54	GND	GND	GND
55	GND	GND	GND
56	GND	GND	GND
57	AV1-L-IN	AV1 LEFT INPUT	-
58	AV1-L-OUT	AV1 LEFT OUTPUT	-
59	GND	GND	GND
60	GND	GND	GND

PIN NO.	ITEM	FUNCTION	OUT VOLT
61	AV1-R-IN	AV1 RIGHT INPUT	-
62	AV1-R-OUT	AV1 RIGHT OUT	-
63	GND	GND	GND
64	GND	GND	GND

4-9-6 Caption Module

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	C-OUT	MAIN C-OUT	-
2	C-IN	MAIN C-IN	-
3	OSD-F/B	OSD-F/B IN	-
4	OSD-B	OSD-B IN	-
5	OSD-G	OSD-G IN	-
6	OSD-R	OSD-R IN	-
7	H-SYNC	H-SYNC	-
8	GND	GND	GND
9	CVBS	CVBS	-
10	5V-D	5V-D	-5V
11	GND	GND	GND
12	SCL	SCL	-
13	SDA	SDA	-
14	GND	GND	GND
15	V-SYNC	V-SYNC	-
16	V-OUT	SUB-BLK/MAIN-Y	-
17	12V	12V	12V
18	GND	GND	GND
19	OSD-F/B	OSD-F/B OUT	-
20	OSD-B	OSD-B OUT	-
21	OSD-G	OSD-G OUT	-
22	OSD-R	OSD-R OUT	-


4-8-7 CONV-Module

PIN NO.	ITEM	FUNCTION	OUT VOLT
1	6V	6V	6V
2	GND	GND	GND
3	FOCUS	N.C	-
4	GND	GND	GND
5	D2	SDA	-
6	D1	SCL	-
7	GND	GND	GND
8	C-SYNC	C-SYNC OUT	4.41V
9	R	WHEN TEST PATTERN R OUT	-
10	TEST-Y/G	WHEN TEST PATTERN G OUT	-
11	B	WHEN TEST PATTERN B OUT	-
12	D3	D3/NT-PAL SEL	0.2V
13	CTRL	CTRL	-
14	IR	INPUT REMOCON	3V
15	COMP	COMP VIDEO OUTPUT	-
16	GND	GND	GND
17	GND	GND	GND
18	GND	GND	GND
19	BV	BLUE VERTICAL OUT	-
20	BH	BLUE HORIZONTAL OUT	-
21	GV	GREEN VERTICAL OUT	-
22	GH	GREEN HORIZONTAL OUT	-
23	RV	RED VERTICAL OUT	-
24	RH	RED HORIZONTAL OUT	-
25	GND	GND	GND
26	H-BLK	H-BLANKING OUT	0.52V
27	V-BLK	V-BLANKING OUT	-
28	GND	GND	GND
29	N.C	N.C	-
30	-5.4V	-5.4V	-5.4V


PIN NO.	ITEM	FUNCTION	OUT VOLT
31	5.4V	5.4V	5.4V
32	GND	GND	GND

5. Troubleshooting


5-1 Convergence Misaligned

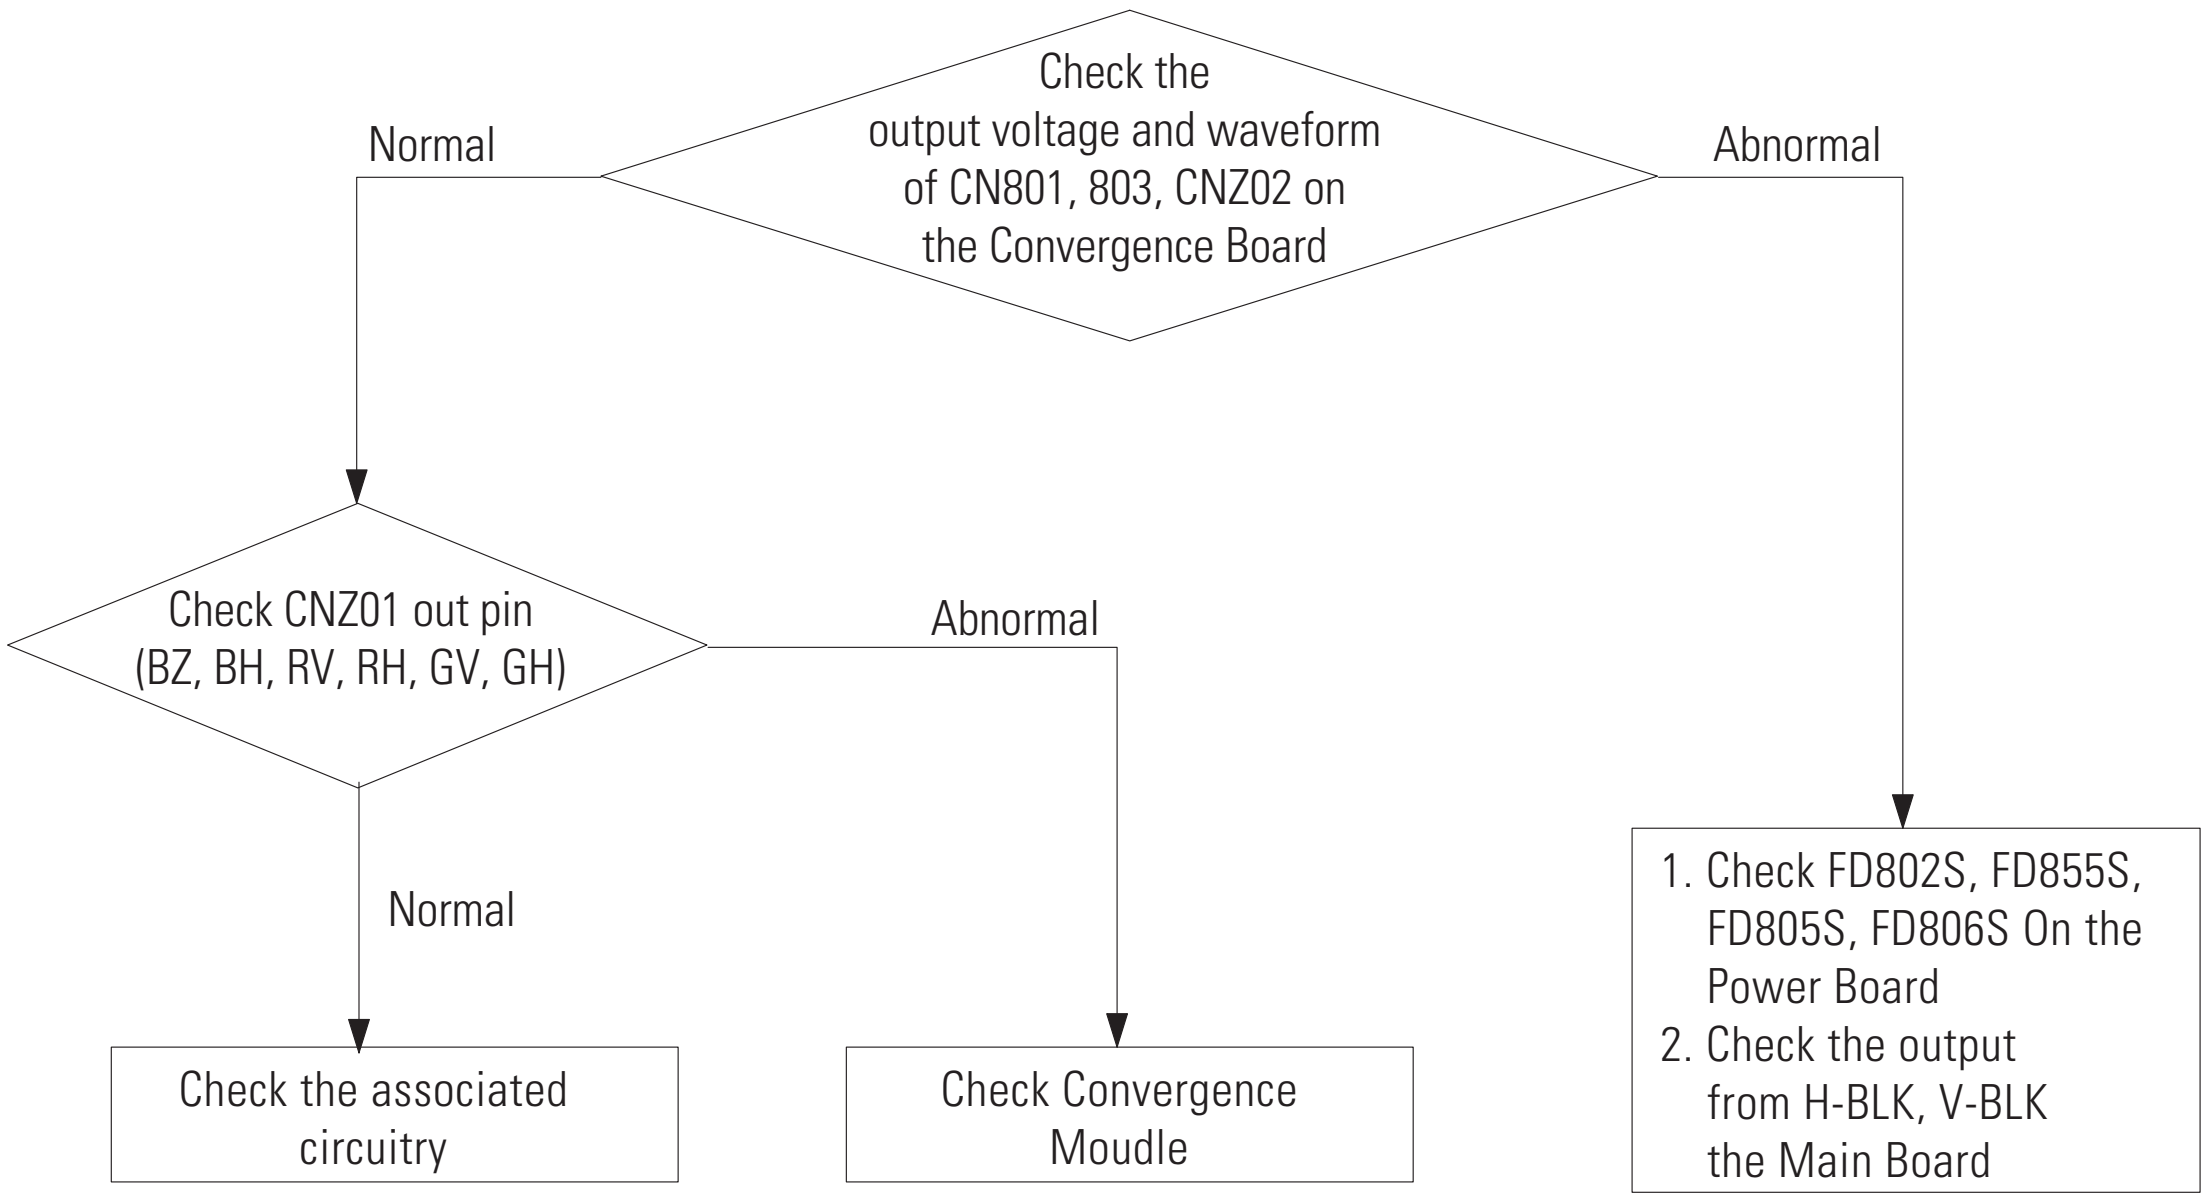

5-2 No Sound

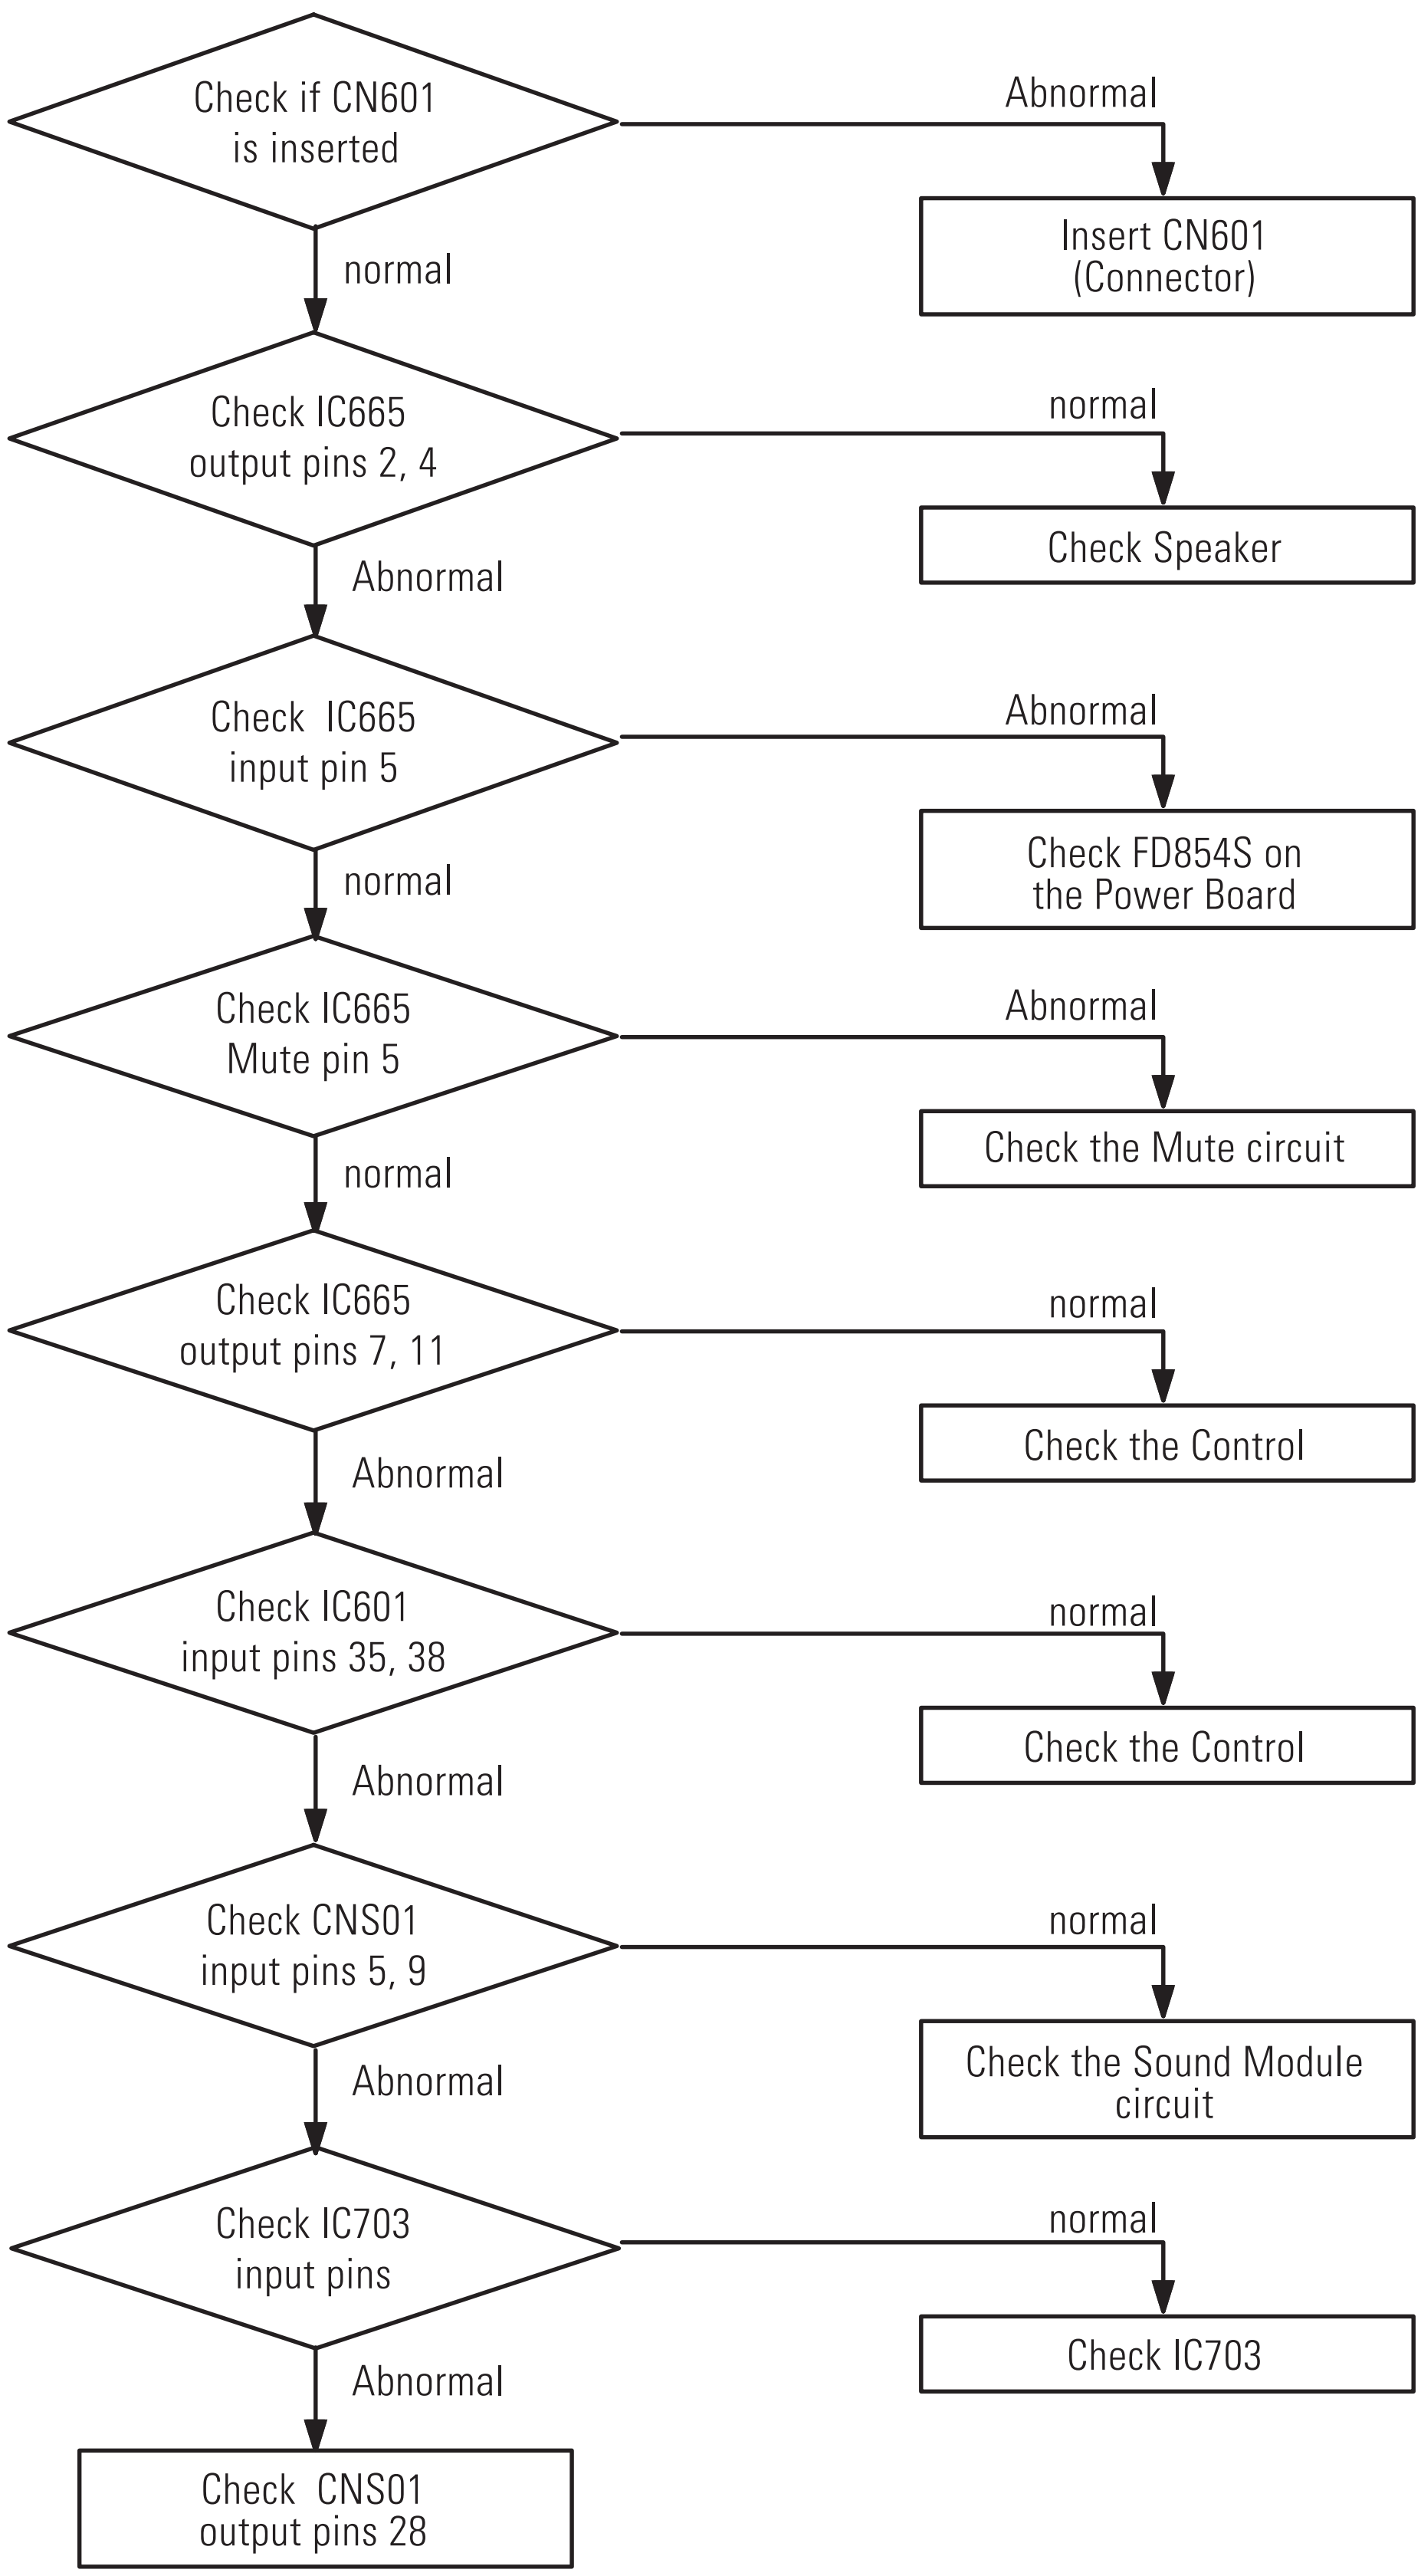
Check if CN601
is inserted
Abnormal
Insert CN601
(Connector)
normal
Check IC665
output pins 2, 4
normal
Check Speaker
Abnormal
Check IC665
input pin 5
Abnormal
Check FD854S on
the Power Board
normal
Check IC665
Mute pin 5
Abnormal
Check the Mute circuit
normal
Check IC665
output pins 7, 11
normal
Check the Control
Abnormal
Check IC601
input pins 35, 38
normal
Check the Control
Abnormal
Check CNS01
input pins 5, 9
normal
Check the Sound Module
circuit
Abnormal
Check IC703
input pins
normal
Check IC703
Abnormal
Check CNS01
output pins 28


5-3 No Raster (Sound OK)

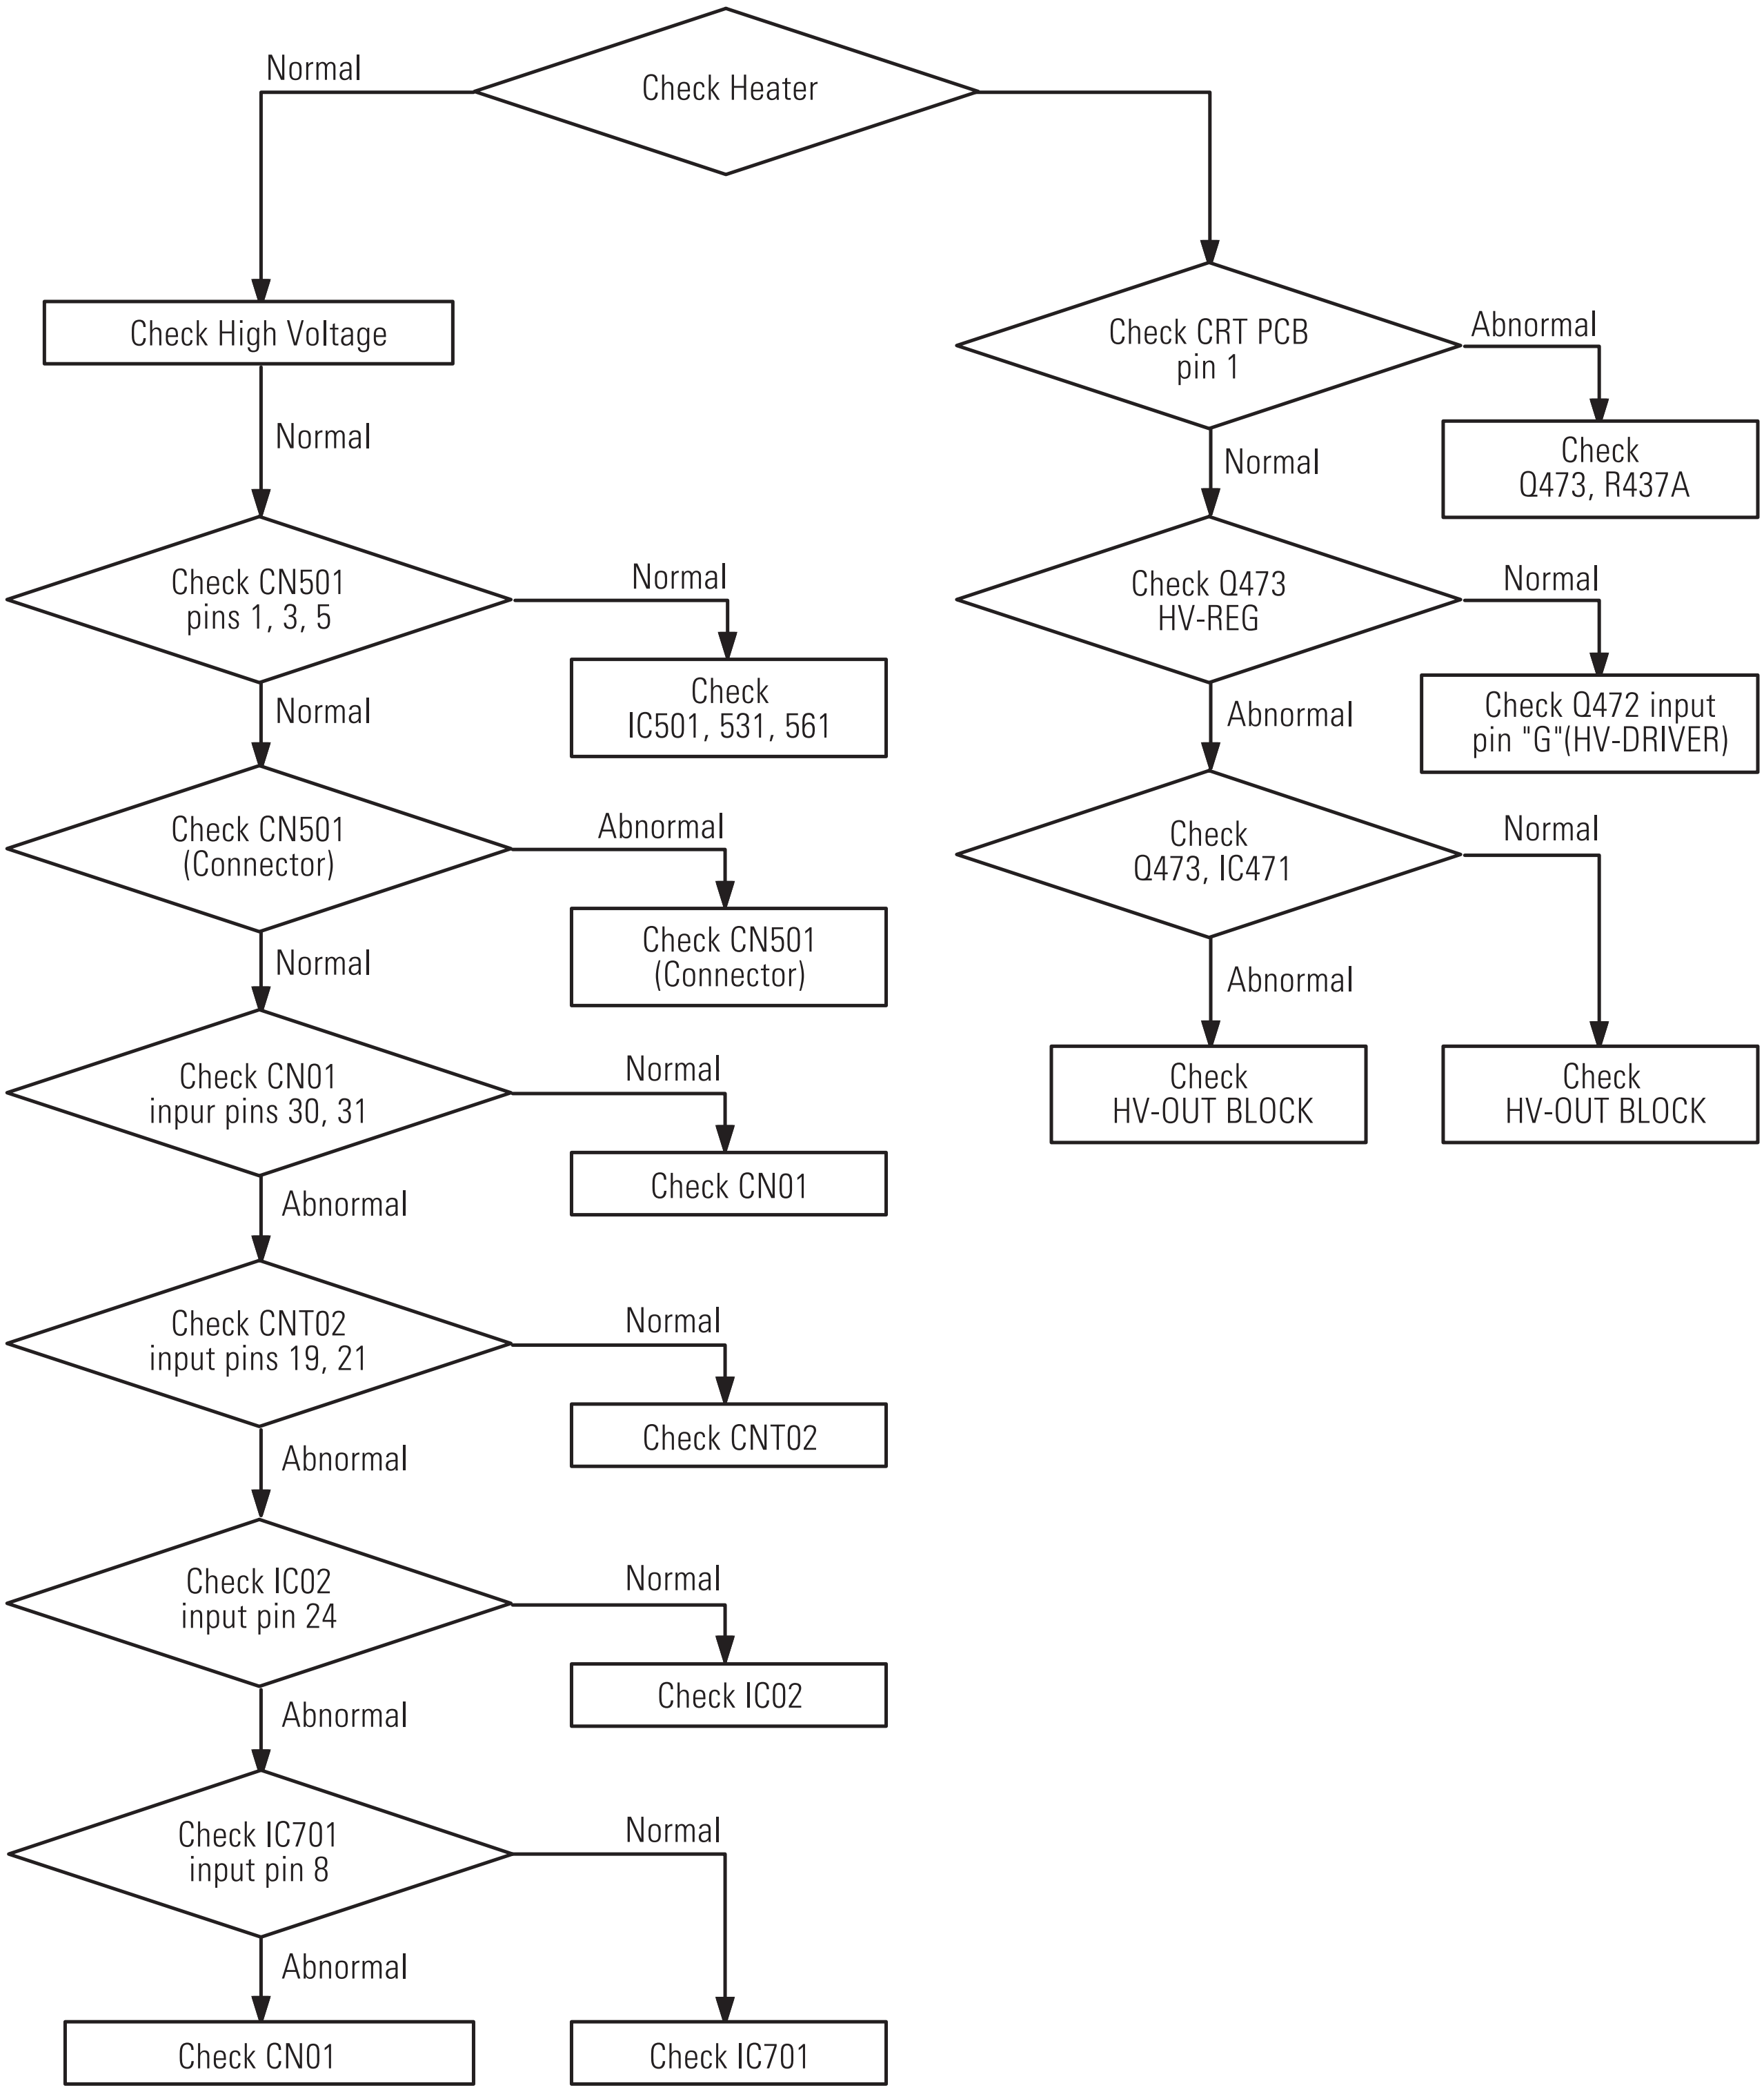

MEMO

6. Exploded View & Parts List

6-1 65W3

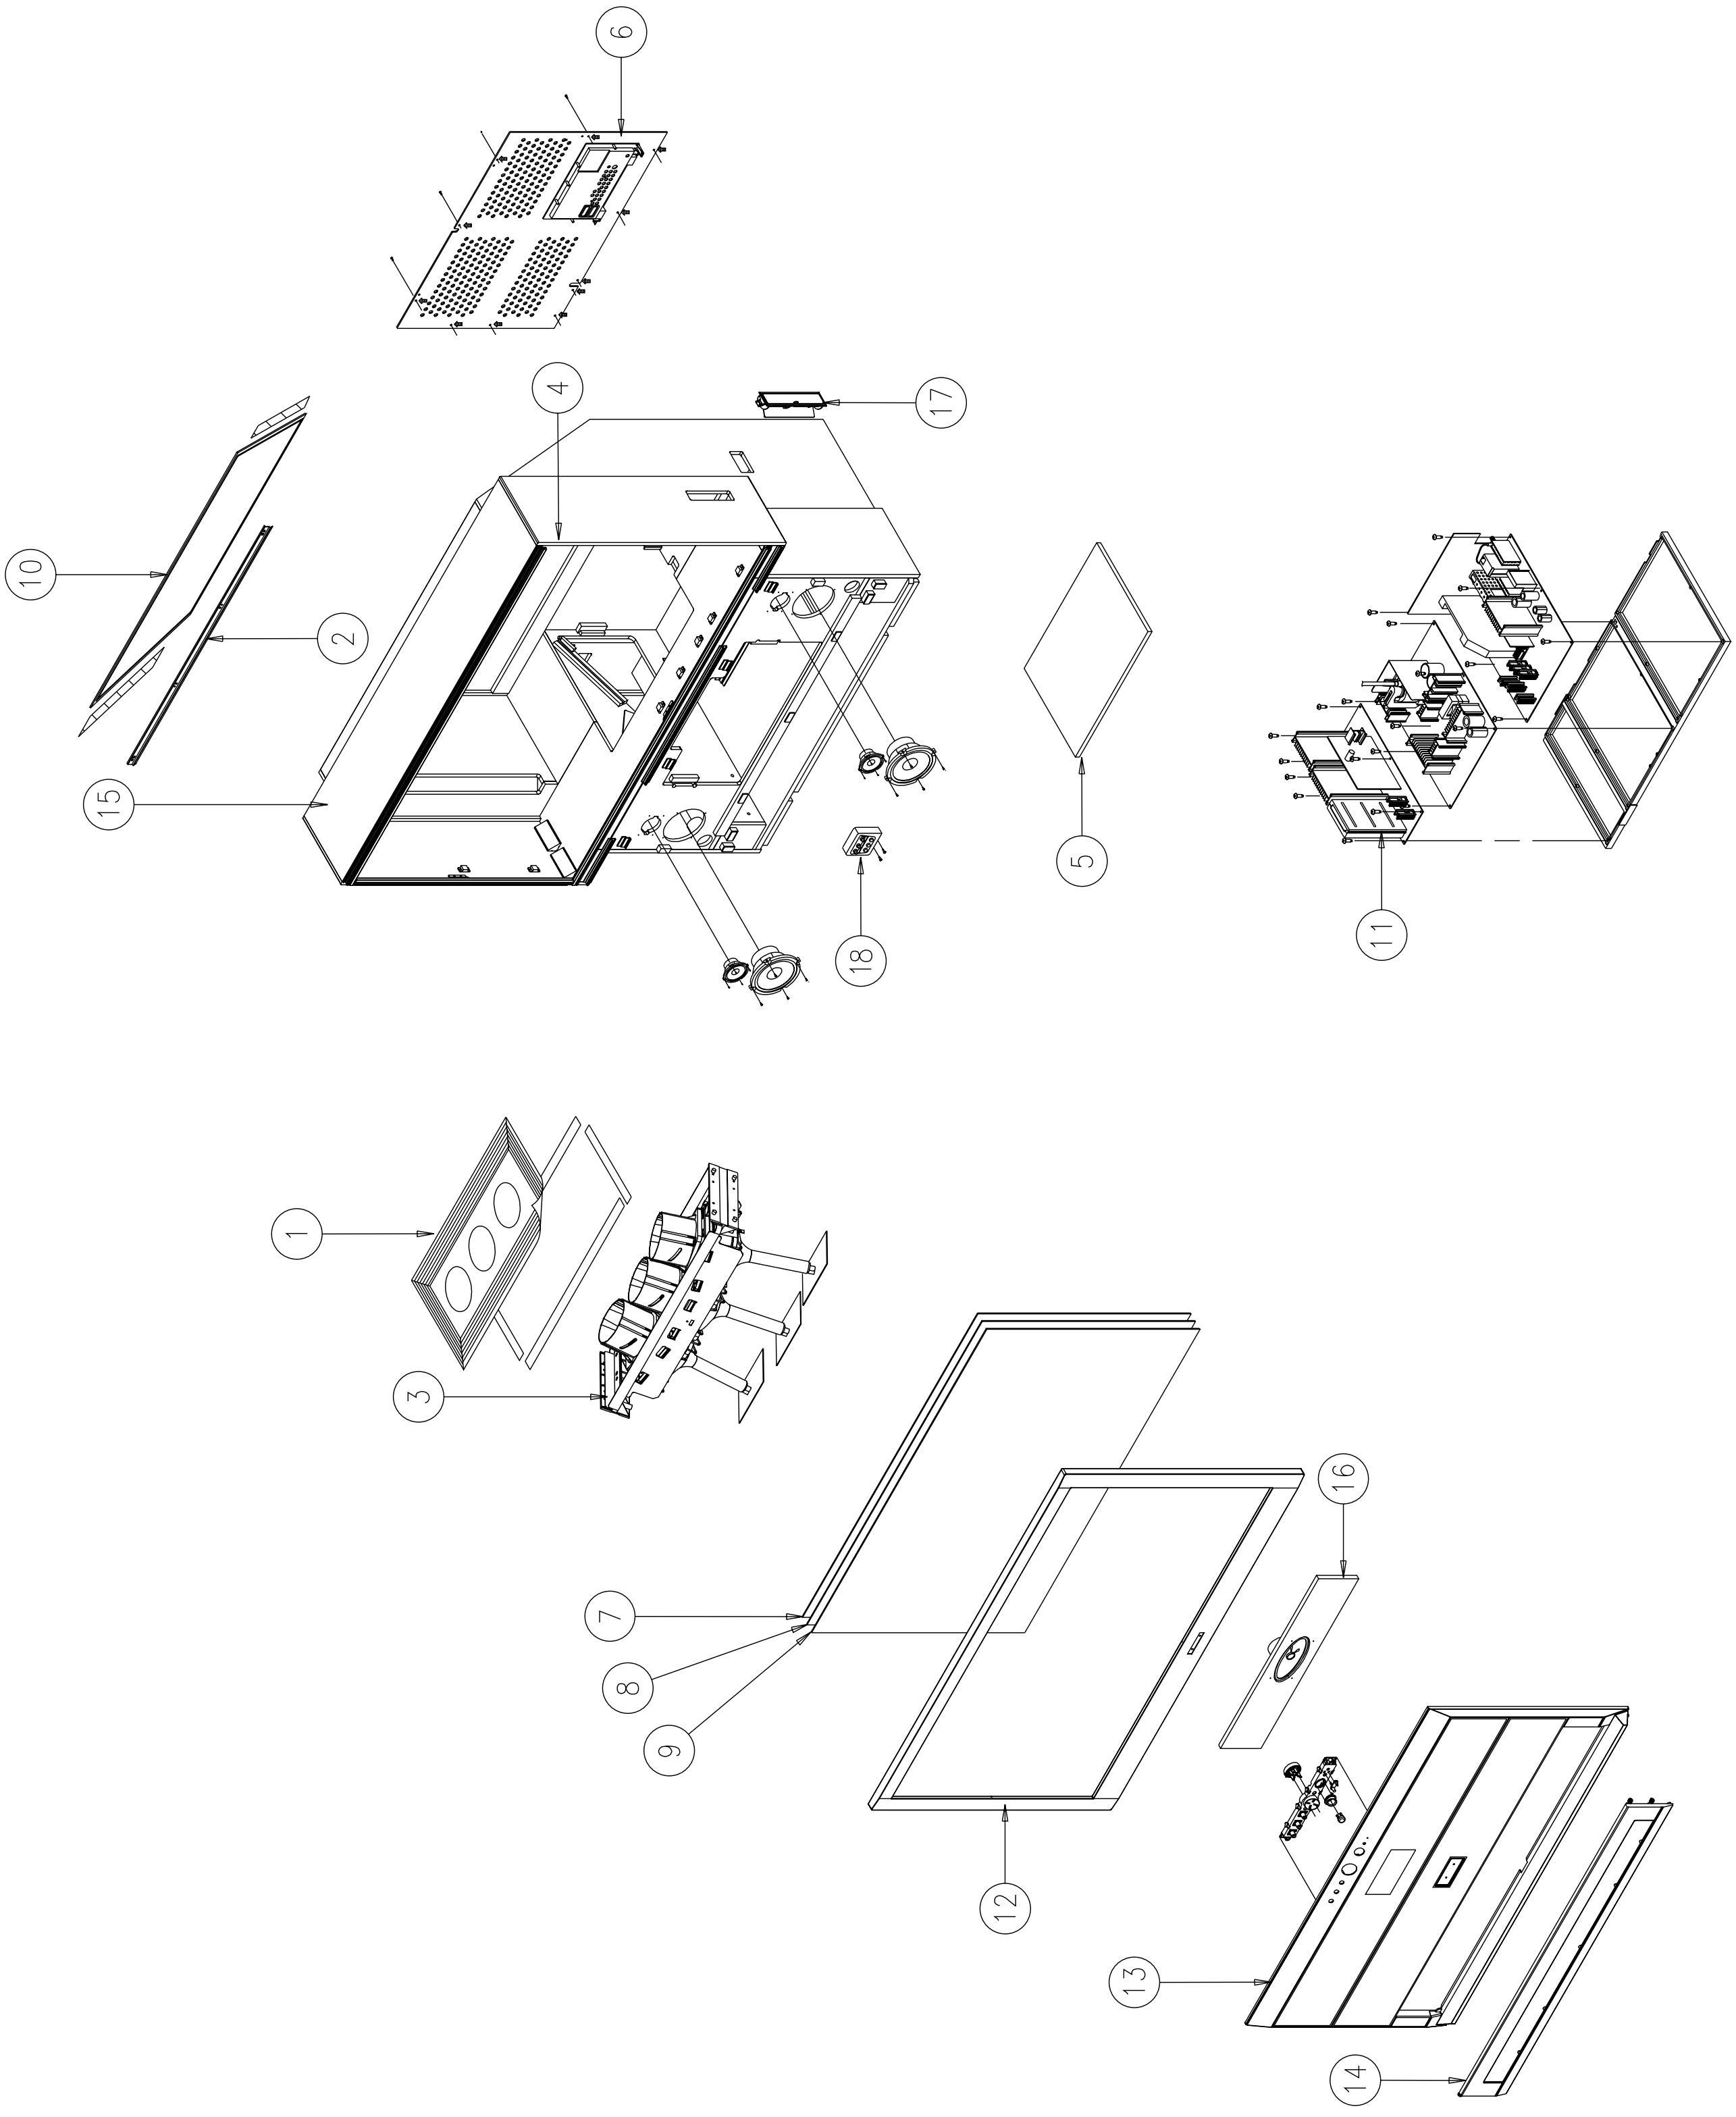


6-2 HCM653WX/XAA

No	Code No	Description;Specification	Q'ty	Remark	S.N.A
1	AA60-00134A	SPACER-COVER,DUST;65W3,SPONGE,T2.0,94HF-	1		S.N.A
2	AA61-00357H	HOLDER-MIRROR;W3,ABS HB,L1060,BLK	1		S.N.A
3	AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,-,-,-,-	1		S.N.A
4	AA61-00973D	HOLDER-SCREEN,L;65W3,ABS HB,BLK	1		S.N.A
5		COVER-DUST,WOOD	1		
6	AA64-02596A	CABINET BACK-BOT;55W3,HIPS V0,BLK	1		
7	AA67-00202A	SCREEN-TINT;65W,1466*862,T=0.73,P=0.52	1		
8	AA67-00125B	SCREEN-FRESNEL;65W,-,T2,1468*864,-,-,-,-	1		
9	AA67-00133A	SUN SCREEN-AG;65W,-,T=82%,1468*864*2,-,-	1		
10	AA67-00164A	MIRROR-FRONT;65W3,GLASS ,1177*891*614,FS	1		
11	AA91-04155A	ASSY CHASSIS;HCM653WX/XAA,P54A	1		S.N.A
12	AA91-00754D	ASSY-C/FRONT,MASK;ABS HB,DG703P,65W3(HCM	1		
13	AA91-00755M	ASSY-C/FRONT,BOT;,HIPS V0,SS1028+DG703P,	1		
14	AA91-00757C	ASSY-DOOR,RACK;,HB GRAY,SS1028+DG703P,W3	1		
15	AA91-00761C	ASSY-CABINET,WOOD;,WOOD,MIJU,65W3	1		S.N.A
16	AA91-00766A	ASSY-CENTER,SPK;,W3	1		
17	AA91-00762D	ASSY-JACK,SIDE;,P54A PAL XAA,W3	1		
18	AA59-00218A	MODULE;SVP-5200,F301-P03,BK	1		

6-3 HCM653WX/XAC

No	Code No	Description;Specification	Q'ty	Remark	S.N.A
1	AA60-00134A	SPACER-COVER,DUST;65W3,SPONGE,T3.0,94HF-	1		S.N.A
2	AA61-00357H	HOLDER-MIRROR;W3,ABS HB,L1060,BLK	1		S.N.A
3	AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,-,-,-,-	1		S.N.A
4	AA61-00973D	HOLDER-SCREEN,L;65W3,ABS HB,BLK	1		S.N.A
5		COVER-DUST,WOOD	1		
6	AA64-02596A	CABINET BACK-BOT;55W3,HIPS V0,BLK	1		
7	AA67-00202A	SCREEN-TINT;65W,1466*862,T=0.73,P=0.52	1		
8	AA67-00125B	SCREEN-FRESNEL;65W,-,T2,1468*864,-,-,-,-	1		
9	AA67-00133A	SUN SCREEN-AG;65W,-,T=82%,1468*864*2,-,-	1		
10	AA67-00164A	MIRROR-FRONT;65W3,GLASS ,1177*891*614,FS	1		
11	AA91-04375A	ASSY CHASSIS;HCM653WX/XAC,P54A,	1		S.N.A
12	AA91-00754D	ASSY-C/FRONT,MASK;ABS HB,DG703P,65W3(HCM	1		
13	AA91-00755M	ASSY-C/FRONT,BOT;,HIPS V0,SS1028+DG703P,	1		
14	AA91-00757C	ASSY-DOOR,RACK;,HB GRAY,SS1028+DG703P,W3	1		
15	AA91-00761E	ASSY-CABINET,WOOD;,WOOD,XAC,65W3	1		S.N.A
16	AA91-00766A	ASSY-CENTER,SPK;,W3	1		
17	AA91-00762D	ASSY-JACK,SIDE;,P54A PAL XAA,W3	1		
18	AA59-00218A	MODULE;SVP-5200,F301-P03,BK	1		

6-4 55w3

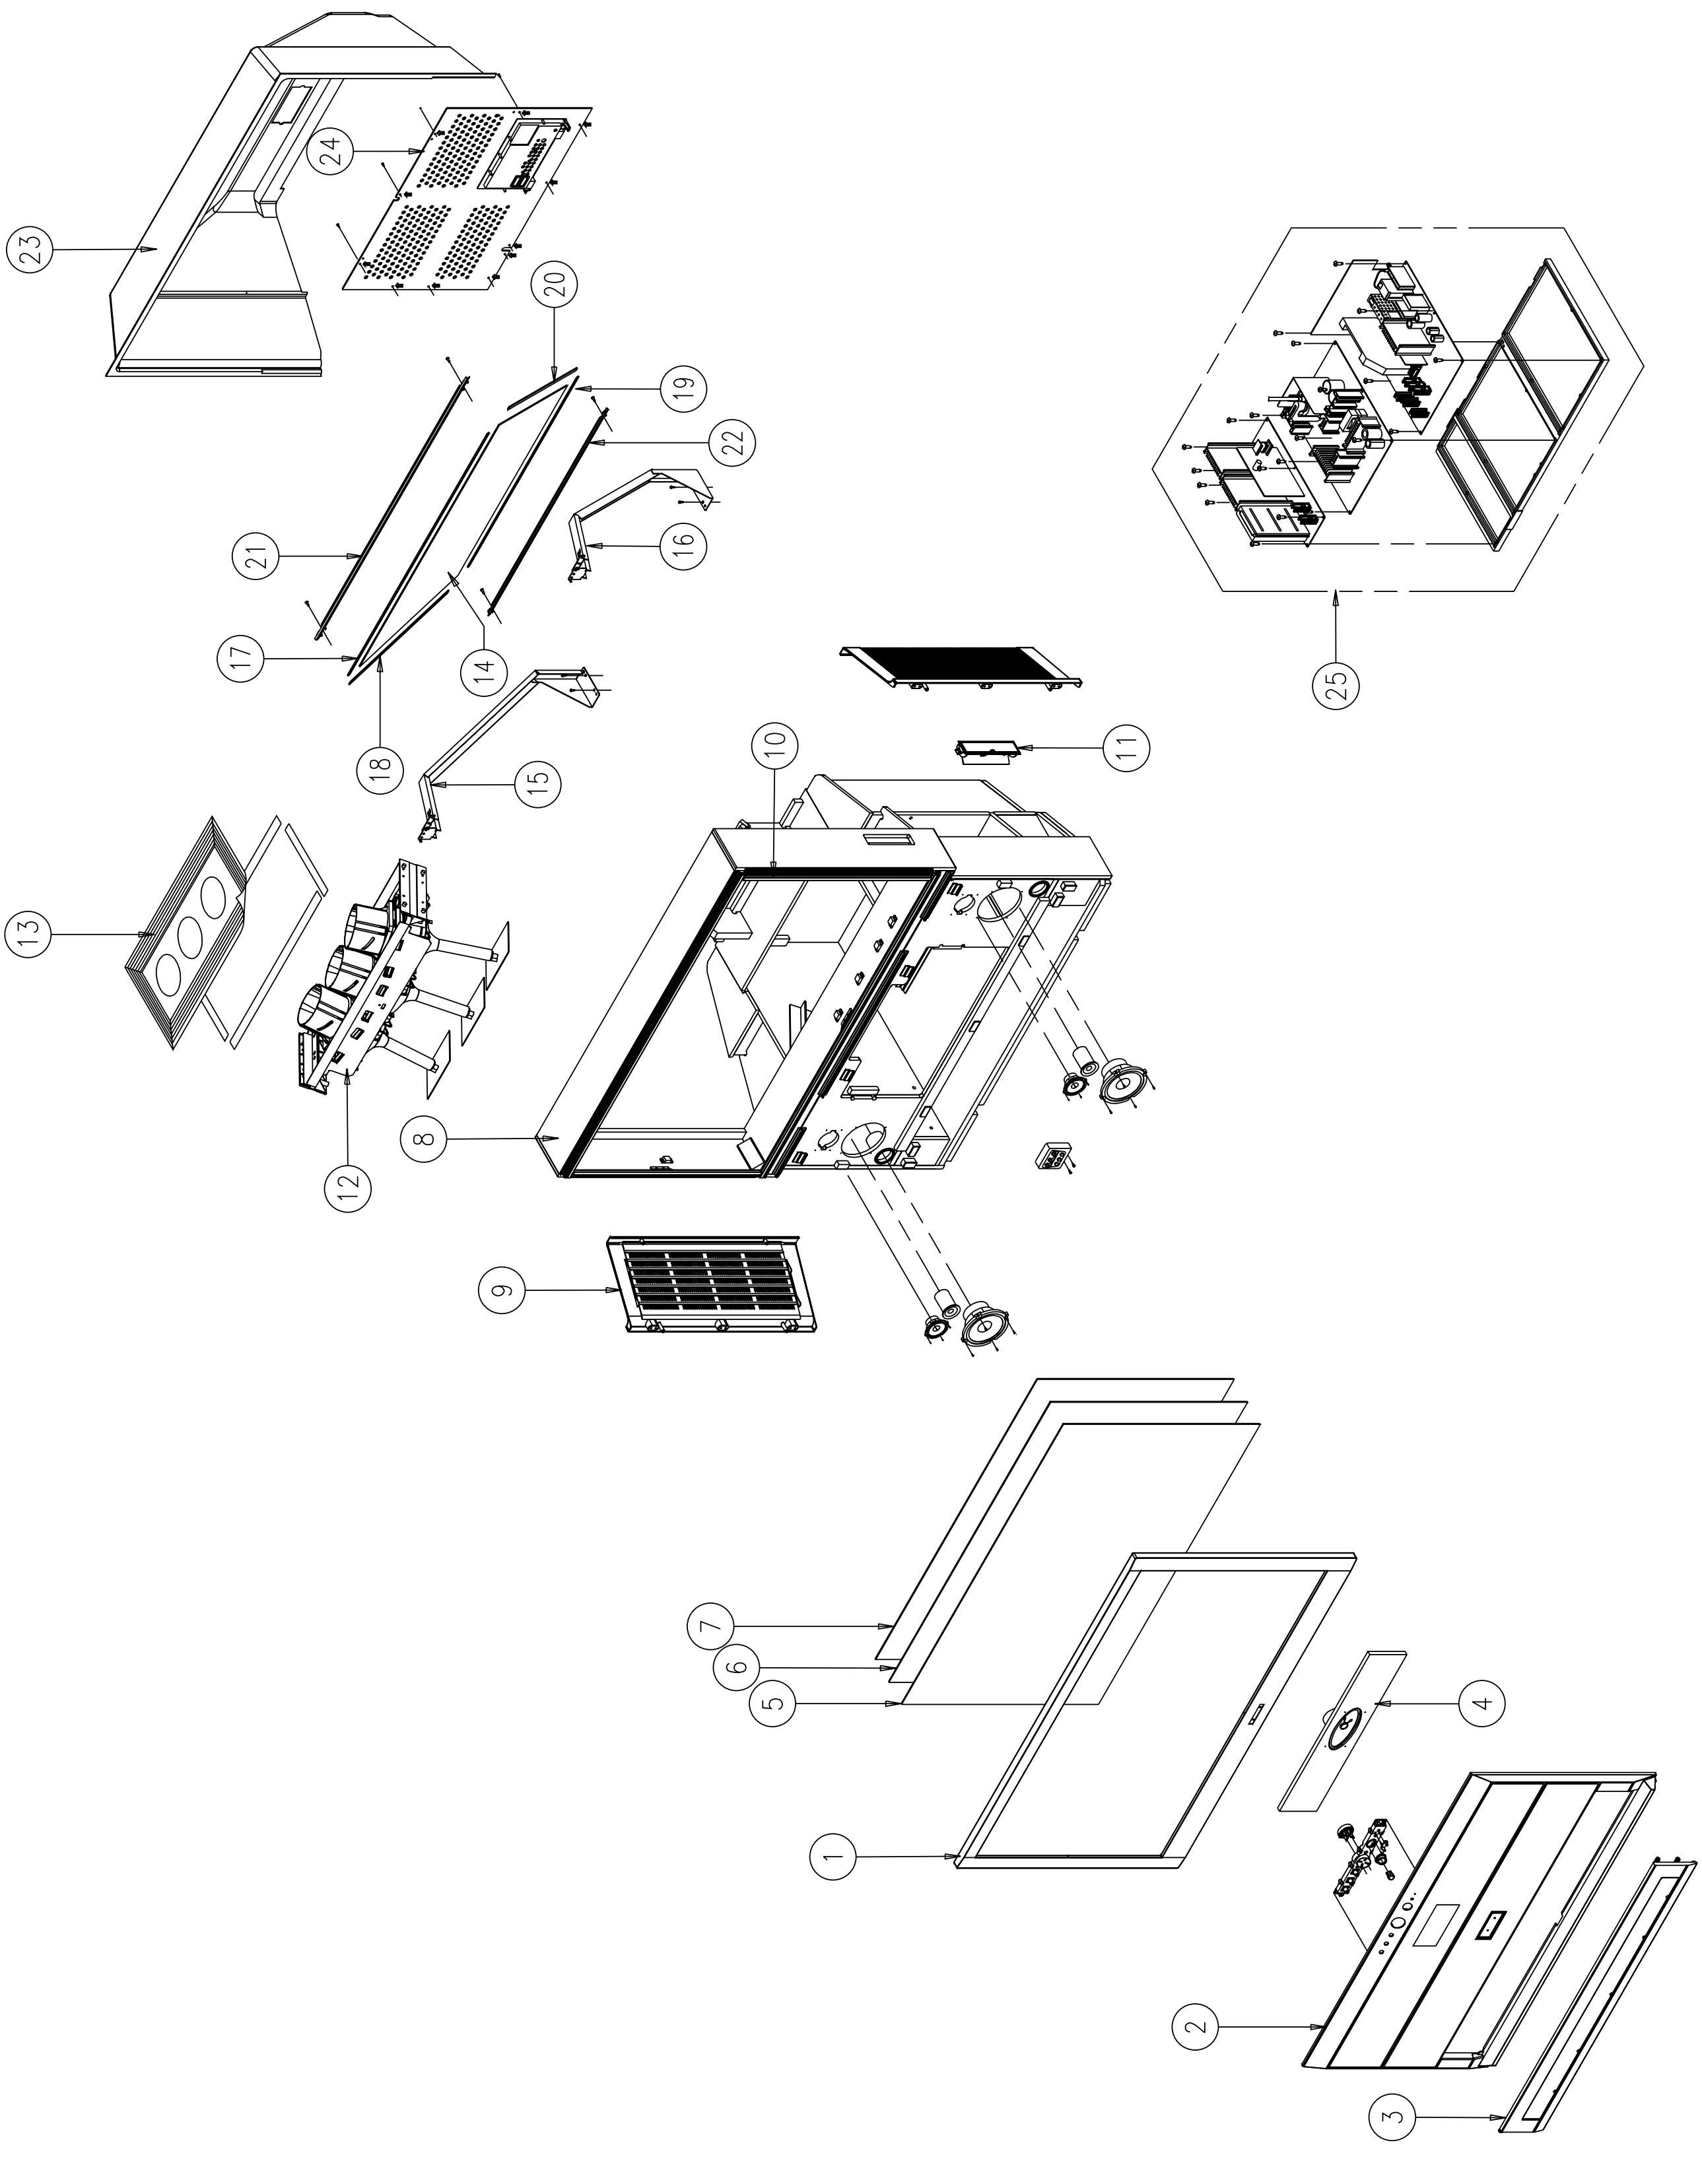

6-5 HCM5525WX/XAA

No	Code No	Description;Specification	Q'ty	Remark	S.N.A
1	AA91-00843C	ASSY-C/FRONT,MASK;DP,64-02059F,55W3	1	CF/MAS	
2	AA91-00842H	ASSY-C/FRONT,BOT;DP,64-02064L MIJU,55,65	1	CF/BOT	
3	AA91-00774H	ASSY-DOOR,RACK;DP,W3,HB GRAY,02066H	1	A/DOOR	
4		ASSY-CENTER,SPK	1		
5	AA67-00132A	SUN SCREEN-AG;55W,-,T=82%,1251*712*2,-,-	1	SUN/SC	
6	AA67-00124B	SCREEN-FRESNEL;55W,T2,1251*712	1	S/FRES	
7	AA67-00200A	SCREEN-TINT;55W,1249*710,T=0.73,P=0.52	1	S/TINT	
8	AA64-02208D	CABINET-WOOD;55W3HD,WOOD,MIJU	1	CW	
9	AA64-02225C	CABINET-BACK,SIDE DP,47.55W3,HIPS HB,BLK	2	C/BSID	
10	AA61-00971C	HOLDER-SCREEN,TB;55W3,ABS,HB,BLK,L1282	2	H/SCRE	
11	AA91-00762D	ASSY-JACK,SIDE;,P54A PAL XAA,W3	1		
12	AA61-00475B	BRACKET-CRT,MAIN;SECC,T1.6,-,-,-,-	1	BCRTM	
13	AA60-00072B	SPACER-COVER,DUST;43,54,62J9,SPONGE V0(9	1	SCDUST	
14	AA67-00206A	MIRROR-FRONT;55W9,FSM,1027*799*540	1	M/FRON	
15	BP61-00032A	BRACKET-F/MIRROR(L);DP,55W3,61-01091A	1	BRA/ML	
16	BP61-00031A	BRACKET-F/MIRROR(R);DP,55W3,61-01090A	1	BRA/MR	
17	AA63-00021L	SPACER-MIRROR;TOP,50J6,PVC,BLK,HB L1020	1	S/MIRR	
18	AA63-00021K	SPACER-MIRROR;50J6,PVC,BLK,HB L500	1	S/MIRR	
19	AA63-00021M	SPACER-MIRROR,BOT;50J6,PVC,B,L799,BLK	1	S/MIRR	
20	AA63-00021K	SPACER-MIRROR;50J6,PVC,BLK,HB L500	1	S/MIRR	
21	BP61-00033A	BRACKET-MIRROR(TOP);DP,553W,61-01092A	1	BRA/MT	
22	BP61-00034A	BRACKET-MIRROR(BOT);DP,553W,61-01093A	1	BRA/MB	
23	BP64-00030A	CABINET-BACK,TOP;DP,55W3,BP64-00014A	1	C/BTOP	
24	AA64-01849C	CABINET-BACK,BOT DP,62J8,VO,AA64-01384B	1	C/BBOT	
25	AA91-04133A	ASSY-CHASSIS-P54A;HCM5525W3S/XAA	1	A/CHAS	

6-6 HCM553WX/XAA

No	Code No	Description;Specification	Q'ty	Remark	S.N.A
1	AA91-00843B	ASSY-C/FRONT,MASK;DP,64-02059E,55W3	1	CF/MAS	
2	AA91-00842G	ASSY-C/FRONT,BOT;DP,64-02064K MIJU,55,65	1	CF/BOT	
3	AA91-00774G	ASSY-DOOR,RACK;DP,W3,HB GRAY,64-02066E	1	A/DOOR	
4	AA91-00766A	ASSY-CENTER,SPK;,W3	1	A/CENT	
5	AA67-00132A	SUN SCREEN-AG;55W,-,T=82%,1251*712*2,-,-	1	SUN/SC	
6	AA67-00124B	SCREEN-FRESNEL;55W,T2,1251*712	1	S/FRES	
7	AA67-00200A	SCREEN-TINT;55W,1249*710,T=0.73,P=0.52	1	S/TINT	
8	AA64-02208D	CABINET-WOOD;55W3HD,WOOD,MIJU	1	CW	
9	AA64-02225C	CABINET-BACK,SIDE DP,47.55W3,HIPS HB,BLK	2	C/BSID	
10	AA61-00971C	HOLDER-SCREEN,TB;55W3,ABS,HB,BLK,L1282	2	H/SCRE	
11	AA91-00762D	ASSY-JACK,SIDE;,P54A PAL XAA,W3	1		
12	AA61-00475B	BRACKET-CRT,MAIN;SECC,T1.6,-,-,-,-	1	BCRTM	
13	AA60-00072B	SPACER-COVER,DUST;43,54,62J9,SPONGE V0(9	1	SCDUST	
14	AA67-00206A	MIRROR-FRONT;55W9,FSM,1027*799*540	1	M/FRON	
15	BP61-00032A	BRACKET-F/MIRROR(L);DP,55W3,61-01091A	1	BRA/ML	
16	BP61-00031A	BRACKET-F/MIRROR(R);DP,55W3,61-01090A	1	BRA/MR	
17	AA63-00021L	SPACER-MIRROR;TOP,50J6,PVC,BLK,HB L1020	1	S/MIRR	
18	AA63-00021K	SPACER-MIRROR;50J6,PVC,BLK,HB L500	1	S/MIRR	
19	AA63-00021M	SPACER-MIRROR,BOT;50J6,PVC,B,L799,BLK	1	S/MIRR	
20	AA63-00021K	SPACER-MIRROR;50J6,PVC,BLK,HB L500	1	S/MIRR	
21	BP61-00033A	BRACKET-MIRROR(TOP);DP,553W,61-01092A	1	BRA/MT	
22	BP61-00034A	BRACKET-MIRROR(BOT);DP,553W,61-01093A	1	BRA/MB	
23	BP64-00030A	CABINET-BACK,TOP;DP,55W3,BP64-00014A	1	C/BTOP	
24	AA64-01849C	CABINET-BACK,BOT DP,62J8,VO,AA64-01384B	1	C/BBOT	
25	AA91-04006A	ASSY CHASSIS;HCM5525W3S/XAA,P54A	1	A/CHAS	

7. Electrical Parts List

7-1 HCM653WX/XAA

ASSY CHASSIS

Loc. No.	Code No.	Description ; Specification	Remark
1 *	AA91-04155A	ASSY CHASSIS;HCM653WX/XAA,P54A	S.N.A
..2 PM+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2 PP+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2 PS+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	AA95-01841A	ASSY SUB-PCB,SENSOR;PCL545R,P54A,AA95-01	
...3 CN01	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
...3 D01	0603-001067	PHOTO DIODE;-,10V,560nm,BK	
...3	AA97-05352A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
....4 PCB	AA41-00433B	PCB-SENSOR;PCL545R,CEM-1,1L,A,1.6T,245X2	S.N.A
....4 Q01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 R01	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R02	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R03	2001-000454	R-CARBON;2.2MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
..2	AA95-01846D	ASSY SUB-PCB,SUB;PCL545R,P54A,AA95-00705	
...3 C432	2306-000267	C-FILM,MPPF;8.2nF,5%,1.6KV,TP,28.5x18.5x	
...3 C438	2306-000267	C-FILM,MPPF;8.2nF,5%,1.6KV,TP,28.5x18.5x	
...3 C491	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
...3 C876	2401-000787	C-AL;220uF,20%,160V,GP,TP,16x31.5mm	
...3 CN202	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
...3 CN801	AA39-00180A	LEAD CONNECTOR ASSY;,14P,YBNH250-14,3515	
...3 CN802	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
...3 CN803	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
...3 CNW801	AA39-20061G	LEAD CONNECTOR-ASSY;,3P,YFH800-03,S,100M	
...3 CNZ02	AA39-00115A	LEAD CONNECTOR-ASSY;,10P,YBNH250-10,3515	
⚠ ...3 CR430S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
⚠ ...3 CR431S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
⚠ ...3 CR436S	2306-000235	C-FILM,MPPF;560nF,5%,400V,TP,26*22.5*14,	
⚠ ...3 CR471S	2301-001091	C-FILM,MPPF;470nF,5%,400V,TP,26x21.5x14.	
⚠ ...3 CR473S	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
⚠ ...3 CR474S	2306-000326	C-FILM,MPPF;4.7nF,5%,1.6KV,TP,28.5x16x9m	
⚠ ...3 CS803	2401-003370	C-AL;47uF,20%,450V,GP,BK,16X35.5,7.	
⚠ ...3 CY811S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
⚠ ...3 CY812S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
...3 D464	0402-000562	DIODE-RECTIFIER;UF5406,600V,3A,DO-201AD,	
⚠ ...3 D811S	0402-000102	DIODE-BRIDGE;D2SB60,600V,1.5A,-	
...3 IC301	AA96-50406A	ASSY-H/S;-,-,AA62-30180K,LA7845,-	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	1204-000517	IC-VERTICAL DEF.;LA7845,SIP,7P,-,PLASTIC	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30180K	HEAT-SINK,ES;-,A6063 EXTR,-,WHT,50/13,-,	S.N.A
⚠ ...3 IC421	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
⚠ ...3 IC430	1203-000162	IC-POSI.ADJUST REG.;317,TO-220,3P,-,PLAS	
⚠ ...3 IC431	1201-000191	IC-OP AMP;4558,DIP,8P,300MIL,DUAL,20V/mV	
⚠ ...3 IC471	1203-000610	IC-PWM CONTROLLER;494,DIP,16P,300MIL,PLA	
...3 ICS801	AA13-00024A	IC-HYBRID;-,TNY253P,-,8PIN,-,-	
...3 ICS807	AA96-00111P	ASSY H/S;-,MAIN,AA62-30013L,KA278RA05,FA	S.N.A
....4	1203-001978	IC-VOLTAGE REGULATOR;KA278RA05,TO-220F,4	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30013L	HEAT-SINK,ES;-,-,-,-,44/22,-,WHT,-,-,-,-	S.N.A
...3 ICZ103	AA96-00891A	ASSY H/S;-,CONVERGENCE,AA62-30173L,STK39	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	1201-001225	IC-VIDEO AMP;392,SIP,22P,-,TRIPLE,-,PLAS	
....4	6003-001021	SCREW-TAPTITE;RH,+,B,M3,L15,ZPC(YEL),SWR	S.N.A
....4	AA62-30173L	HEAT SINK;PJT,A6063,T2.0,H130,CG MODULE	S.N.A
...3 ICZ104	AA96-00891A	ASSY H/S;-,CONVERGENCE,AA62-30173L,STK39	S.N.A
...3 L432	AA27-00095A	COIL HORIZ. WIDTH;-,600uH,YL9N 15x27.5 C	
...3 L434	AA27-00221A	COIL HORIZ. WIDTH;600UH,600UH,SB5S OS6X2	
...3 L435	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3 L854	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3 L860	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3 L862	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3 L872	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3 L874	AA27-10002L	COIL-CHOKE;-,24uH,K,-,2A,-,24UH-K,10x10m	
⚠ ...3 LC431S	AA27-30003M	COIL-LINEARLITY;-,5uH,OWA14x15,USRC0.1x6	
⚠ ...3 PC811S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
...3 Q353	0502-000442	TR-POWER;2SC4636RB,NPN,2W,TO-220,ST,10-	
...3 Q431	AA96-00033E	ASSY H/S;-,H-OUT,AA62-30173C,2SC5446, FM	S.N.A
....4	AA62-30173C	HEAT-SINK,ES;-,-,T1.0,WHITE,SCREW-HOLE(2	S.N.A
....4	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,-,SBHG	S.N.A
....4	AA02-00007A	MICA;DPM-04,MICA,22x29x0.15mm	S.N.A
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	0502-001175	TR-POWER;2SC5446,NPN,200000mW,TO-3PL,BK,	
....4	0402-001296	DIODE-RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
...3 Q433	AA96-50407A	ASSY-H/S;-,-,AA62-30154G,KSD73Y,-	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	0502-000298	TR-POWER;KSD73,NPN,30000mW,TO-220,TP,120	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30154G	HEAT-SINK,ES;-,A6063 EXTR,-,WHT,50/16,-,	S.N.A
...3 Q441	AA96-50383F	ASSY-H/S;-,-,AA62-30180D,2SD921,-	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	0502-001104	TR-POWER;2SD921,NPN,80W,TO-3P,BK,700-	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30180D	HEAT-SINK,ES;-,A6063 EXTR.,2,WHT,50mm,-,	S.N.A
...3 Q473	AA96-00037A	ASSY-H/S;-,-,AA62-30181N,2SC4125, IRFS64	S.N.A
....4	AA62-30181N	HEAT-SINK,ES;-,-,T1.0,WHITE,SCREW-HOLE(2	S.N.A
....4	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,-,SBHG	S.N.A
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	0505-001202	FET-SILICON;IRFS640A,N,200V,9.8A,0.18ohm	
....4	0502-001100	TR-POWER;2SC4125,NPN,70W,TO-3PML,BK,8-	
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
⚠ ...3 RL811S	3501-001053	RELAY-POWER;5Vdc,530mW,10A,1FormA,15mS,5	
⚠ ...3 RL812S	3501-001040	RELAY-POWER;12VDC,500mW,10A,1FormA,15mS,	
⚠ ...3 T431	AA26-50001U	TRANS-HORIZ.DRIVE;-,-,-,28mH,-,-,105uH,-	
⚠ ...3 T432	AA26-00012A	TRANS-DUMMY;-,-,-,-,-,-,-,-,-,-,-,-,-,EER4	
⚠ ...3 T433	AA26-00011A	TRANS-DUMMY;-,-,-,-,-,-,-,-,-,-,-,-,-,EE28	
⚠ ...3 T444S	AA26-00100A	TRANS FBT;FFA97513L,CT29A7DR,0.3mH,-,-,-	
⚠ ...3 T461	AA26-50001V	TRANS-HORIZ.DRIVE;-,-,-,6.0mH,-,-,113uH,	
⚠ ...3 T481	AA26-00091A	TRANS-HV-STORAGE;4mH,-,14P,830uH,180V,10	
⚠ ...3 TS811S	AA26-00055B	TRANS SWITCHING;,HLK436W,AC80V,AC80~280V	
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	AA97-05175A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
....4 C301	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
....4 C302	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4 C303	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
....4 C304	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4 C305	2201-002022	C-CERAMIC,DISC;0.005nF,0.25pF,500V,NP0,T	
....4 C307	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
....4 C308	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
....4 C309	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
....4 C311	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C351	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
....4 C352	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
....4 C353	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C354	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
....4 C355	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
....4 C405	2201-000558	C-CERAMIC,DISC;0.47nF,10%,50V,Y5P,TP,5x3	
....4 C406	2201-000370	C-CERAMIC,DISC;0.22nF,10%,50V,Y5P,TP,4x3	
....4 C412	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C413	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C417	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
....4 C418	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C419	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
....4 C426	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C427	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
....4 C428	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C429	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
....4 C437	2401-003114	C-AL;4.7uF,20%,250V,WT,TP,10x16,5	
....4 C445	2401-001622	C-AL;6.8uF,20%,50V,BP,TP,16x25mm,7.	
....4 C449	2201-000406	C-CERAMIC,DISC;0.27nF,10%,2kV,Y5P,TP,6.3	
....4 C450	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C451	2401-001160	C-AL;33uF,20%,160V,GP,-,16x35mm,7.5	
....4 C452	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
....4 C453	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
....4 C454	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
....4 C455	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
....4 C456	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
....4 C457	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
....4 C458	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
....4 C459	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
....4 C460	2303-000331	C-FILM,PPF;4.7nF,5%,630V,TP,19.5x12x7,7.	
....4 C467	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C468	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C469	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
....4 C472	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
....4 C476	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
....4 C477	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
....4 C478	2301-000020	C-FILM,PEF;27nF,5%,100V,TP,7.3x4x12.5mm,	
....4 C479	2301-000200	C-FILM,PEF;2.2nF,5%,200V,TP,11.0x6.0x9.0	
....4 C480	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C481	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
....4 C483	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
....4 C484	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
....4 C487	2305-000178	C-FILM,MPEF;10nF,5%,100V,TP,-,5mm	
....4 C488	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 C489	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C490	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C492	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
....4 C857	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
....4 C866	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 C869	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 C873	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
....4 CN401	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
....4 CN403	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
⚠ 4 CR401S	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
⚠ 4 CR402S	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,	
⚠ 4 CR403S	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,	
....4 CS804	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 CS805	2401-001101	C-AL;330uF,20%,16V,GP,TP,8x11.5,5	
....4 CS807	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 CS808	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 CS809	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
....4 CS812	2201-002076	C-CERAMIC,DISC;0.068nF,5%,1kV,SL,TP,8x4m	
....4 CS813	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
....4 CS814	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
....4 CZ101	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
....4 CZ102	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
....4 CZ108	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
....4 CZ109	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
....4 CZ110	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
....4 CZ111	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
....4 CZ112	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
....4 CZ113	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
....4 CZ114	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
....4 CZ115	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
....4 CZ116	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
....4 CZ117	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
....4 CZ118	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
....4 CZ126	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
....4 CZ127	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
....4 CZ128	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
....4 CZ132	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
....4 CZ133	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
....4 CZ134	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
....4 CZ135	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
....4 CZ136	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
....4 CZ137	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
....4 CZ138	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
....4 CZ139	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
....4 CZ140	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 CZ141	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 CZ151	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
....4 CZ152	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
....4 CZ153	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
....4 CZ154	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
....4 CZ155	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
....4 CZ156	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
....4 D302	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D353	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D384	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 D385	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D433	0402-000537	DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
....4 D434	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D435	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 D436	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D440	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4 D441	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4 D442	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D443	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D444	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D445	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4 D451	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4 D453	0402-001286	DIODE-RECTIFIER;RP1H,2000V,.1A,-,TP	
....4 D472	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D474	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D477	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D478	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D479	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D480	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 D484	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 D501	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 4 DR401S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4 DR402S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4 DR404S	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
....4 DS805	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
....4 DS807	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DS809	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
....4 DZ301	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
....4 DZ304	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
....4 DZ305	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
....4 DZ306	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500mW,D	
....4 DZ307	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
....4 DZ386	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO	
....4 DZ395	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
....4 DZ400	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
....4 DZ413	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
....4 DZ473	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
....4 DZ474	0403-000734	DIODE-ZENER;TZP15B,15V,14.7-16.5V,1W,DO-	
....4 DZ481	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
⚠ 4 DZ482S	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
....4 DZ483	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
....4 DZ801	0406-001106	DIODE-TVS;P6KE300A,285/-/315V,600W,DO-20	
....4 DZ802	0406-001106	DIODE-TVS;P6KE300A,285/-/315V,600W,DO-20	
....4 DZ803	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ804	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m	
....4 DZ805	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
....4 EL01	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EY101	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY102	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY103	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY104	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY105	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY107	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY108	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY109	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY110	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY111	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY112	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY113	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY114	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY115	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY116	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY117	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY118	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY120	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY121	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY122	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY123	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY124	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY125	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY126	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY127	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY128	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY129	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY130	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 EY131	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY132	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY133	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY134	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY136	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY137	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY138	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY139	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY140	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY141	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY142	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY143	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY144	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY145	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY146	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY147	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY148	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY149	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY150	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY151	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY152	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY153	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY154	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY155	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY156	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY157	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY158	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY159	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY160	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY161	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY162	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY163	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY164	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY165	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY166	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY167	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY168	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY171	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY172	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY173	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY174	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY175	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY176	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY177	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY178	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY179	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY180	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY181	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY182	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY183	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY184	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY185	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY186	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY187	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY188	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY189	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY190	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY191	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY192	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY193	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY194	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY195	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY196	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY197	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY198	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY199	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY200	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY201	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY202	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY203	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY204	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY205	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY206	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY207	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY208	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY209	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY210	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY211	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY212	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY213	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY214	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY215	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY216	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY217	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY218	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY219	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY220	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY221	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY222	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY223	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY224	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY225	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY226	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY227	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY228	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY229	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY230	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY231	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY232	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY233	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EYS01	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EYS02	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EYS03	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EYS04	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EYS05	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EYS06	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EYS07	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EYS08	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EYS09	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
⚠ 4 FD101S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
⚠ 4 FD102S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
....4 GT01	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT02	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT03	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT04	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT05	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT06	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT07	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT08	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT09	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT10	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT11	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT12	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT16	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT17	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT18	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT19	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT21	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT22	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT23	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT24	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT25	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT26	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT27	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT28	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT29	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT30	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT31	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT32	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT33	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT34	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT35	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT37	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT403	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT404	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT405	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT812A	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT813A	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT814A	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
⚠ 4 ICR01S	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
....4 L341	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
....4 L480	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L481	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L482	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	

Loc. No.	Code No.	Description ; Specification	Remark
....4 L483	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
....4 L493	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L494	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
....4 L495	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L499	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 LS801	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 LS802	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 LZ107	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ108	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ109	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ110	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ111	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ112	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 PCB	AA41-00340C	PCB-SUB;PCL545R,CEM-1,1L,C,1.6T,330X245,	S.N.A
....4 Q301	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q350	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q351	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q352	0501-000366	TR-SMALL SIGNAL;KSC2330-Y,NPN,1W,TO-92L,	
....4 Q381	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q382	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q401	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q402	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q421	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q422	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
....4 Q432	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q435	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
....4 Q436	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q451	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q461	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q471	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q472	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
....4 Q474	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q481	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q482	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
⚠ 4 QR401S	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 QS801	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
....4 R301	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
....4 R302	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
....4 R303	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R305	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R306	2003-002129	R-METAL OXIDE(S);3.9ohm,5%,2W,AF,TP,3.9x	
....4 R307	2003-002129	R-METAL OXIDE(S);3.9ohm,5%,2W,AF,TP,3.9x	
....4 R308	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4 R310	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
....4 R312	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R313	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R314	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R332	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 R333	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 R334	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 R350	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R351	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R352	2001-000837	R-CARBON;51KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R353	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R354	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R355	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R356	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R357	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R358	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R359	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R360	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R361	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R362	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R363	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R364	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R365	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R366	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R384	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R385	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R386	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R387	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R388	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R389	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R397	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R405	2009-001109	R-TEMPERATURE;240ohm,5%,1/4W,AA,TP,2.3x6	
....4 R406	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R407	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
....4 R408	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R409	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R410	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R411	2008-001113	R-FUSIBLE(S);0.22ohm,10%,2W,AG,TP,3.9x12	
....4 R412	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R413	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R414	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R415	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R416	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R417	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R418	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R419	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R420	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R421	2003-002159	R-METAL OXIDE;150OHM,5%,1W,AG,TP,4.3X12M	
....4 R422	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R423	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R424	2008-000205	R-FUSIBLE(S);10ohm,5%,1/2W,AF,TP,2.5x6.5	
....4 R425	2003-000417	R-METAL OXIDE(S);1.2Kohm,5%,3W,AA,TP,6x1	
....4 R426	2003-002153	R-METAL OXIDE;4.7OHM,5%,2W,AG,TP,6X16MM	
....4 R427	2003-002279	R-METAL OXIDE(S);1.2OHM,5%,2W,AG,TP,5.6X	
....4 R427A	2003-002279	R-METAL OXIDE(S);1.2OHM,5%,2W,AG,TP,5.6X	
....4 R428	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R428A	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R429	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R430	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R432	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R433	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R434	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R435	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 R436	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R437	2008-001087	R-FUSIBLE(S);1.8ohm,5%,2W,AG,TP,3.9x12mm	
....4 R438	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R439	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R440	2008-000282	R-FUSIBLE;0.47ohm,5%,1W,AA,TP,3.9x12mm	
....4 R441	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R442	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R442A	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R443	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
....4 R443A	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
....4 R444	2003-000995	R-METAL OXIDE(S);3.3Kohm,5%,2W,AF,TP,3.9	
....4 R445	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R446	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R447	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R448	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R449	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R454	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R455	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R456	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R458	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R459	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R460	2003-002044	R-METAL OXIDE(S);100ohm,5%,1W,AF,TP,2.5x	
....4 R461	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R462	2008-001145	R-FUSIBLE;4.7OHM,5%,1/2W,AF,TP,2.5X6.5MM	
....4 R463	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
....4 R464	2003-002158	R-METAL OXIDE;0.68OHM,5%,1W,AG,TP,4.3X12	
....4 R465	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R466	2004-001386	R-METAL(S);16.9Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R467	2004-001986	R-METAL(S);35.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R468	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R469	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R470	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R471	2004-002011	R-METAL(S);110Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R472	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
....4 R473	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R474	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R475	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R482	2001-001031	R-CARBON;91KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R483	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R484	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R485	2008-001137	R-FUSIBLE(S);3.3ohm,5%,1W,AF,TP,3.9x10mm	
....4 R486	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
....4 R487	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R488	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R489	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R490	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R491	2001-000745	R-CARBON;4.7OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R492	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R494	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R495	2001-000262	R-CARBON;1.8MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R501	2004-001376	R-METAL(S);11Kohm,1%,1/2W,AA,TP,2.4x6.4m	
....4 R502	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R856	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R857	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RFS802	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP,3.9x10mm	
....4 RFZ19	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ20	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ21	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ22	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ50	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ51	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ52	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ53	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
⚠ 4 RR401S	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 4 RR402S	2103-001086	VR-SEMI;100KOHM,25%,0.3W,TOP	
⚠ 4 RR403S	2004-004001	R-METAL(S);180Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 4 RR404S	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 4 RR405S	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 4 RR406S	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 4 RR407S	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
⚠ 4 RR408S	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
⚠ 4 RR409S	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
⚠ 4 RR410S	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
⚠ 4 RR471S	2103-001024	VR-SEMI;50Kohm,25%,0.3W,TOP	
....4 RS801	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS803	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS804	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS805	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 RS806	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS807	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS808	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS809	2001-001099	R-CARBON(S);2.7KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RZ104	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ105	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ106	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ107	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ108	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ109	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ110	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ111	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ112	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ113	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ114	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ115	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ116	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ117	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ118	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ123	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ124	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ125	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ126	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ127	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ128	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ129	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ129A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ130	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ130A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ131	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ131A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ132	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ132A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ133	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ134	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ135	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ136	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ137	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ138	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ139	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ140	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ141	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ142	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ143	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ144	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ145	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ146	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ147	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ148	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ148A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ149	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ149A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
⚠ 4 VP811S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
..2	AA95-01847E	ASSY SUB-PCB,SUB AMP;SVP-47W3HR,P54A,KOR	
...3 CNSW60	AA39-20020D	LEAD CONNECTOR-ASSY;,5P,67096-005,S,600,	
...3 CNSW60	BP39-00006A	LEAD CONNECTOR ASSY;P54A/SVP-42W5HD,UL10	
...3 CS603	2401-000732	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
...3 ICS601	AA96-50367A	ASSY-H/S;-,-,AA62-30181D,TDA7265,-	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30181D	HEAT-SINK,ES;-,AL6063 EXTR.,2,WHT,70MM,-	S.N.A
...3	AA97-05521A	ASSY AUTO-SUB;SVP-47W3HR,P54A,KOREA	S.N.A
....4 CNS602	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
....4 CNS603	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CNS604	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
....4 CS602	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 CS605	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
....4 CS606	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
....4 CS608	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 CS611	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 CS612	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 CS614	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
....4 DS601	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 EL01	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EL02	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EL03	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EL04	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 LS601	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 PCB	AA41-00459A	PCB-SUB AMP;SP43T6HF,FR-1,1L,A,1.6T,245X	S.N.A
....4 QS602	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 RS603	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS605	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS606	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS607	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS611	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 RS612	2001-001050	R-CARBON(S);1.5KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS614	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS616	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS618	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 RS619	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS621	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS622	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS623	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS626	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2	AA95-01849A	ASSY SUB-PCB,TERMINAL;HCL552W,P54A,AA95-	S.N.A
...3 CNT01	3711-003630	CONNECTOR-HEADER;BOX,32P,2R,2.54mm,ANGLE	
...3 CNT02	3711-003630	CONNECTOR-HEADER;BOX,32P,2R,2.54mm,ANGLE	
...3 CNY01	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
...3 CNY02	AA39-20052D	LEAD CONNECTOR-ASSY;,4P,YBNH025-04,YSH02	
...3 IC703	0904-001121	IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,30	
...3 IC705	0801-000213	IC-CMOS LOGIC;4052,MULTIPLEXER,DIP,16P,3	
...3 ICD01	1204-001510	IC-SEPARATOR;EL4583CN,DIP,16P,-,PLASTIC,	
...3 ICD02	0801-000284	IC-CMOS LOGIC;4528,MULTIVIBRATOR,DIP,16P	
...3 ICD03	1204-001510	IC-SEPARATOR;EL4583CN,DIP,16P,-,PLASTIC,	
...3 JKV02	3722-001039	JACK-PIN;9P,3.4mm,SN,BLK,#16-22	
...3 JKV03	3722-001382	JACK-PIN;5P(9P),3.4MM,NI,R/W/G/BLUE,-	
...3 JKV04	3722-001626	JACK-PIN;8P/9P,3.4MM,NI,BLK,-	
...3 JKV08	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
...3 RD18	2001-000954	R-CARBON;750KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	AA97-05194A	ASSY AUTO-SUB;HCL552W,P54A	S.N.A
....4 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 C716	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 C730	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
....4 C731	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
....4 C738	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 C740	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 C760	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C761	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C762	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C763	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C764	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C765	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C766	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C767	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C780	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 CD01	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
....4 CD03	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
....4 CD06	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
....4 CD11	2401-000404	C-AL;10uF,20%,16V,BP,TP,5x11,5	
....4 CD12	2401-000404	C-AL;10uF,20%,16V,BP,TP,5x11,5	
....4 CD16	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
....4 CD17	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
....4 L701	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L702	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L711	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L720	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L721	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L722	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L723	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L724	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L725	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L726	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 LD01	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 LD02	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 LD04	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 RN701	2011-000160	R-NETWORK;10Kohm,5%,1/8W,A,SIP,9P,TP	
....4	AA97-06154A	ASSY SMD-SUB;HCL552W,P54A	S.N.A
.....5 C702	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C704	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
.....5 C705	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
.....5 C706	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C707	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C708	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C709	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C710	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C711	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C712	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C713	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C714	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C715	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C717	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C718	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C719	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C720	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C721	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C722	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C723	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C724	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C727	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C732	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C733	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C734	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C735	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C736	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C737	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C739	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C741	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C768	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C769	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 CD02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD05	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
.....5 CD07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD09	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 CD10	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 CD13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD15	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD18	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
.....5 IC701	1001-001030	IC-VIDEO SWITCH;TDA6920X,-,SOP,28P,300MI	
.....5 IC702	1001-001030	IC-VIDEO SWITCH;TDA6920X,-,SOP,28P,300MI	
.....5 PCB	AA41-00343A	PCB-TERMINAL;PCL545R,FR-4,2L,A,1.6T,180X	S.N.A
.....5 Q701	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q702	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q703	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q704	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q705	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q706	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q707	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q711	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q712	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q714	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 QD01	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 QD02	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 QD03	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 QD04	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 R701	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R702	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R703	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R704	2007-001157	R-CHIP;750ohm,5%,1/16W,DA,TP,1608	
.....5 R705	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R706	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R707	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R708	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R709	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R710	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R712	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R713	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R714	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R715	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R716	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R717	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R718	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R719	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R720	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R721	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R722	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R723	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R724	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R725	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R726	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R727	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R728	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R729	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R734	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.....5 R735	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.....5 R740	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R741	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R742	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R743	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R744	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R745	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R748	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R749	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R750	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R751	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R752	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R753	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
.....5 R754	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
.....5 R755	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R756	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R757	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R758	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R759	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R760	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R761	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
.....5 R762	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R763	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R764	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
.....5 R765	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R766	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R767	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R768	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R769	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R774	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R775	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R776	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R777	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R779	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R780	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R788	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R791	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R792	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R793	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R794	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R795	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R796	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R797	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R820	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R821	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R829	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R830	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 RD01	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 RD02	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 RD03	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
.....5 RD04	2007-000096	R-CHIP;30Kohm,5%,1/16W,DA,TP,1608	
.....5 RD05	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 RD06	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 RD07	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
.....5 RD08	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 RD09	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
.....5 RD11	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
.....5 RD12	2007-000913	R-CHIP;43Kohm,5%,1/16W,DA,TP,1608	
.....5 RD13	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 RD14	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
.....5 RD15	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
.....5 RD16	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 RD17	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 RD19	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 RD20	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 RD21	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 RP784	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 RY701	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 RY702	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 RY703	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
..2	AA95-01853A	ASSY SUB-PCB,V/M;PCL545R,P54A,AA95-00714	
...3 CNZ101	AA39-20055E	LEAD CONNECTOR-ASSY;,6P,YBNH025-06,67096	
...3 QZ101	AA96-50162F	ASSY-H/S;-,POWER,AA62-30013E,2SA1011,30M	S.N.A
....4	0502-000131	TR-POWER;2SA1011-D,PNP,1.2W,TO-220,-,60	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30013E	HEAT-SINK,ES;-,A6063 EXTR,-,-,30(21) T02	S.N.A
...3 QZ102	AA96-50162G	ASSY-H/S;-,AMP,AA62-30013E,2SC2344,30MM	S.N.A
....4	0502-000153	TR-POWER;2SC2344-D,NPN,1.2W,TO-220,-,60	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30013E	HEAT-SINK,ES;-,A6063 EXTR,-,-,30(21) T02	S.N.A
...3 RZ120	2008-001097	R-FUSIBLE(S);33OHM,5%,1/2W,AC,BK,2.5X6.5	
...3	AA33-00011A	MAGNET CONVERGENCE;JH92LTU-36C,29.1MM,0.	
...3	AA97-05191A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
....4 CNZ102	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CNZ103	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CNZ104	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CZ101	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 CZ102	2401-001157	C-AL;33uF,20%,160V,GP,TP,12.5x20,5	
....4 CZ103	2201-000516	C-CERAMIC,DISC;4.7nF,+100-0%,500V,Y5U,TP	
....4 CZ104	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
....4 CZ105	2201-000516	C-CERAMIC,DISC;4.7nF,+100-0%,500V,Y5U,TP	
....4 CZ106	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
....4 CZ107	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
....4 CZ108	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
....4 CZ109	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
....4 CZ110	2201-000604	C-CERAMIC,DISC;0.056nF,+100-0%,500V,SL,T	
....4 CZ111	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 CZ112	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
....4 DZ101	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DZ102	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DZ103	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DZ104	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DZ105	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DZ106	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 LZ101	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
....4 PCB	AA41-00344A	PCB-VM;PCL545R,FR-1,1L,A,1.6T,245X245,P5	S.N.A
....4 QZ103	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 QZ104	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QZ105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QZ106	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 RFZ101	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
....4 RZ101	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ102	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ103	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	

Loc. No.	Code No.	Description ; Specification	Remark
....4 RZ104	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ105	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ106	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ107	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ108	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ109	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ110	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ111	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4 RZ112	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4 RZ113	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4 RZ114	2003-000532	R-METAL OXIDE(S);18ohm,5%,2W,AF,TP,4x12m	
....4 RZ115	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ116	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ117	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ118	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ119	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ121	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ122	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 RZ123	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
⚠ ..2	AA96-00156E	ASSY POWER CORD;-,EP2/YES(US),H/S 150MM,	S.N.A
..2	AA94-11166D	ASSY PCB MISC-CRT;PCL545R,P54A	
...3 CN501	3711-003051	CONNECTOR-HEADER;BOX,8P,1R,2.5MM,STRAIGH	
...3 CN502	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3 CN502B	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3 CN503	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3 CN503B	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3 CNW401	AA39-20027B	LEAD CONNECTOR-ASSY;,6P,67096-006,S,400,	
...3 CNW501	AA39-00127C	LEAD CONNECTOR-ASSY;,8P,35155-0800,S,500	
...3 CNW502	AA39-00112A	LEAD CONNECTOR-ASSY;,10P,35155-1000,S,30	
...3 CNW503	AA39-00112A	LEAD CONNECTOR-ASSY;,10P,35155-1000,S,30	
...3 FOCUS-	AA39-20115A	LEAD CONNECTOR-ASSY;,1P,BUSHING,500,3239	
...3 FOCUS-	AA39-20115D	LEAD CONNECTOR ASSY;P54A/SVP-55W3HD,UL32	
...3 FOCUS-	AA39-20115D	LEAD CONNECTOR ASSY;P54A/SVP-55W3HD,UL32	
...3 GBW-GN	AA39-00047E	LEAD CONNECTOR-ASSY;,1P,JUMPER,BLK,300MM	
...3 GBW-SC	AA39-00049A	LEAD CONNECTOR-ASSY;,1P,JUMPER,RED,300MM	
...3 GNDWIR	AA39-00198C	LEAD CONNECTOR ASSY;P54A/SVP-55W3HD,UL16	
...3 GRW-GN	AA39-00047E	LEAD CONNECTOR-ASSY;,1P,JUMPER,BLK,300MM	
...3 GRW-SC	AA39-00049A	LEAD CONNECTOR-ASSY;,1P,JUMPER,RED,300MM	
...3 IC501	AA96-50151B	ASSY-H/S;-,AMP,AA61-10060A,TDA6111Q,-	S.N.A
....4	1201-001131	IC-VIDEO AMP;6111,SIP,9P,-,SINGLE,-,PLAS	
....4	6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH1	S.N.A
....4	6021-000222	NUT-HEXAGON;2C,M3,ZPC(YEL),SM20C 1	S.N.A
....4	AA61-10060A	BRACKET-TR;W3220,CUS-1 1/2H,T0.5,-,-,-,-	S.N.A
...3 IC531	AA96-50151B	ASSY-H/S;-,AMP,AA61-10060A,TDA6111Q,-	S.N.A
...3 IC561	AA96-50151B	ASSY-H/S;-,AMP,AA61-10060A,TDA6111Q,-	S.N.A
...3 SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3 SG532	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3 SG562	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3 V501	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 V531	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 V561	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 VR501	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3 VR531	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3 VR561	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	AA97-05330A	ASSY AUTO-SUB;PCL545R,P54A,U.S.A,54	S.N.A
....4 C502	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C503	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C504	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
....4 C505	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C506	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C507	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C510	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C511	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
....4 C512	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
....4 C513	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
....4 C514	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
....4 C532	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C533	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C534	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
....4 C535	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C536	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C537	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C540	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C541	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
....4 C542	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
....4 C543	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
....4 C562	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C563	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C564	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
....4 C565	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C566	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C567	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C570	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C571	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
....4 C572	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
....4 C573	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
....4 CN401	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
....4 D501	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D502	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D503	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 D504	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D509	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D510	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D531	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D532	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D533	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 D561	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D562	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D563	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 DZ501	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ502	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ503	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 DZ531	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ532	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ533	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 DZ561	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ562	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ563	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 EL503	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL504	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL505	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL533	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL534	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL535	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL563	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL564	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL565	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 GT501	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT502	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT503	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT504	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT531	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT532	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT533	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT534	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT561	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT562	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT563	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT564	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT565	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT566	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 L501	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L531	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L561	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 PCB	AA41-00406B	PCB-CRT;PCL545R,FR-1,1L,B,1.6T,245X245,P	S.N.A
....4 Q501	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 Q502	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q504	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q531	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 Q533	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q561	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 Q563	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 R500	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R502	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R503	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R504	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R505	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R506	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R507	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R508	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R509	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R510	2001-001000	R-CARBON;82KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R511	2001-000313	R-CARBON;11KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R513	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 R514	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R516	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R517	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R518	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R519	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R520	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R521	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R522	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R523	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R524	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R526	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R527	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R528	2001-001015	R-CARBON;9.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R529	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R532	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R533	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R536	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R537	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R538	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R540	2001-000837	R-CARBON;51KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R541	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R543	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 R544	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R545	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R546	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R547	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R548	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R549	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R550	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R551	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R552	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R553	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R554	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R555	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R556	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R557	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R559	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 R562	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R563	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R564	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R566	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R567	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R568	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R569	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R570	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R571	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R572	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R573	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 R574	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R575	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R576	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R577	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R578	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R579	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R580	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R581	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R582	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R583	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R584	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R589	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 SG351	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG501	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG503	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG533	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG561	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG563	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
..2	AA95-01797U	ASSY SUB-PCB,CONTROL;SVP-47W3HR,P54A,AA9	
...3 CNW01	AA39-00223A	LEAD CONNECTOR ASSY;,11P,67096-011,35155	
...3 CNY01	3711-003353	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,ANGLE,	
...3 CNY02	3711-000447	CONNECTOR-HEADER;3WALL,3P,1R,2.5mm,ANGLE	
...3 CNYW02	AA39-00259A	LEAD CONNECTOR ASSY;,UL1007#26,UL/CSA,3P	

Loc. No.		Code No.	Description ; Specification	Remark
...3	LEDY01	0601-001381	LED;ROUND,RED/GRN,5.0MM,650/563NM	
...3	RMY01	AA32-00012A	MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES	
...3	SWY01	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY02	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY03	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY04	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY05	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY06	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY07	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY08	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3		AA97-05321A	ASSY AUTO-SUB;SVP-47W3HR,P54A	S.N.A
....4	CY01	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4	DZY02	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4	DZY03	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4	PCB	AA41-00518A	PCB-CONTROL;SVP-47W3HR,FR-1,1L,A,1.6T,24	S.N.A
....4	QY01	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
....4	RY02	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RY03	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RY04	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RY05	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RY06	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RY07	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4	RY08	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RY09	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3		3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2		AA61-00504B	HOLDER-CHASSIS;43,54,62J8,ABS,-,-,-,GRAY	S.N.A
..2		AA91-00766A	ASSY-CENTER,SPK;,W3	
...3	PCS+SP	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3		AA61-00859A	PLATE-CENTER,SPK;W3,WOOD	S.N.A
...3		AA96-10153A	ASSY-SPEAKER;-,8ohm,15w,001052,20609A,CE	S.N.A
....4	C-SPK	3001-000151	SPEAKER;20W,8ohm,92dB,130Hz	
....4		AA39-20609A	LEAD CONNECTOR-ASSY;,2P,SMH250-02,REC,40	
..2		AA94-07576A	ASSY PCB POWER;PCL545R,P54A,53	
...3	C812	2401-000701	C-AL;2200uF,20%,250V,GP,-,35x70mm,1	
...3	C813	2401-000701	C-AL;2200uF,20%,250V,GP,-,35x70mm,1	
...3	C831	2306-000323	C-FILM,MPPF;2.2nF,5%,1.6KV,TP,28.5x15.5x	
...3	C862	2401-003076	C-AL;3300uF,20%,50V,WP,BK,18x35.5mm	
...3	C865	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
...3	C868	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
...3	C875	2401-002251	C-AL;470uF,20%,200V,GP,BK,25x40mm,1	
...3	CN802	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
...3	CN803	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
⚠ ...3	CX801S	2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
⚠ ...3	CX802S	2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
⚠ ...3	CY801S	2201-000987	C-CERAMIC,DISC;2.2nF,20%,400V,Y5U,TP,12.	
⚠ ...3	CY802S	2201-000987	C-CERAMIC,DISC;2.2nF,20%,400V,Y5U,TP,12.	
⚠ ...3	D801S	AA96-50310A	ASSY-H/S;-,POWER,AA62-30150C,RBV606,-	S.N.A
....4		AA62-30150C	HEAT-SINK,ES;-,A6063 EXTR,-,WHT,40(24.5)	S.N.A
....4		AA60-30003A	WASHER;-,-,-,T1.5,-,SBHG-1,-	S.N.A
....4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4		0402-000549	DIODE-BRIDGE;RBV606,600V,6A,-,BK	
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
⚠ ...3	D810	0402-000250	DIODE-RECTIFIER;RG4C,1000V,1A,-	
⚠ ...3	D854	AA96-50153C	ASSY-H/S;-,-,AA62-30013D,FLM-G12S,-	S.N.A
....4		0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
....4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4		AA62-30013D	HEAT-SINK,ES;-,A6063 EXTR,-,-,55(21) T02	S.N.A
⚠ ...3	D855	AA96-50153C	ASSY-H/S;-,-,AA62-30013D,FLM-G12S,-	S.N.A
⚠ ...3	D856	AA96-50153C	ASSY-H/S;-,-,AA62-30013D,FLM-G12S,-	S.N.A
⚠ ...3	D857	AA96-50153C	ASSY-H/S;-,-,AA62-30013D,FLM-G12S,-	S.N.A
⚠ ...3	D858	AA96-50153C	ASSY-H/S;-,-,AA62-30013D,FLM-G12S,-	S.N.A
⚠ ...3	D859	AA96-50153A	ASSY-H/S;-,TR,AA62-30013D,FMG-G26S,-	S.N.A
....4		0402-000231	DIODE-RECTIFIER;FMG-G26S,600V,4A,TO-220F	
....4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4		AA62-30013D	HEAT-SINK,ES;-,A6063 EXTR,-,-,55(21) T02	S.N.A
⚠ ...3	FD802S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ ...3	FD804S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ ...3	FD855S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ ...3	FP801S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ ...3	IC801S	AA96-00035A	ASSY-H/S;-,POWER,AA62-30181P,STR-F6656,-	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4		AA13-00018A	IC-HYBRID;-,STR-F6656,LF1351,5PIN,-,-	
....4		AA62-30181P	HEAT-SINK,ES;-,-,T1.0,WHITE,SCREW-HOLE(2	S.N.A
⚠ ...3	IC804	1203-001400	IC-POWER PRESCALER;SE110N,T0-220(SIP),3P	
⚠ ...3	LX801S	AA29-30002L	FILTER-LINE NOISE;-,10mHMIN,5A,AC90~260V	
⚠ ...3	LX802S	AA29-30002M	FILTER-LINE NOISE;-,1mHMIN,5A,AC90~260V,	
⚠ ...3	LX803S	AA29-30002M	FILTER-LINE NOISE;-,1mHMIN,5A,AC90~260V,	
⚠ ...3	NT801S	1404-001195	THERMISTOR-NTC;5.1ohm,15%,2900,27mW/C,BK	
⚠ ...3	PC801S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
⚠ ...3	R817	2009-001096	R-METAL PLATE;0.07ohm,5%,5W,CL,BK,5x14x1	
⚠ ...3	R841	2008-001093	R-FUSIBLE(S);22OHM,5%,1/2W,AC,BK,2.5X6.5	
⚠ ...3	T801S	AA26-00099A	TRANS SWITCHING;EER5345,PCL544R,AC220V,1	
...3		AA97-05241A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
....4	C809	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4	C814	2201-002041	C-CERAMIC,DISC;0.82nF,10%,2kV,Y5P,TP,9x5	
....4	C815	2201-000406	C-CERAMIC,DISC;0.27nF,10%,2kV,Y5P,TP,6.3	
....4	C816	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
....4	C817	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
....4	C818	2301-001216	C-FILM,PPF;47nF,5%,630V,TP,20x14.5x22,7.	
....4	C819	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
....4	C833	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4	C834	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
....4	C851	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4	C852	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
....4	C853	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
....4	C854	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4	C855	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
....4	C861	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4	C864	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4	C871	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4	C872	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
....4	C874	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4	C877	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
⚠ 4	D834	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
⚠ 4	D843	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
⚠ 4	D851	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
⚠ 4	D853	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4	DZ858	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
....4	EL01	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4	EL02	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4	EL03	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4	EL04	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4	EL05	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4	EL06	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4	EL09	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4	EL10	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4	EL15	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4	EL18	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4	EL22	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4	EL25	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4	EY01	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY05	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY06	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY100	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY101	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY104	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY107	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY108	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY109	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY110	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY111	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY112	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY113	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY114	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY115	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY116	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY138	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY139	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY140	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY141	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY142	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY143	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY158	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY159	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY163	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY164	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY165	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY166	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY167	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY168	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY170	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EY171	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 EY172	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY173	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY174	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY175	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY176	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY177	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY178	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY179	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY180	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY181	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY182	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY183	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY184	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY185	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY186	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY187	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY188	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY189	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY190	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY191	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY192	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY193	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY71	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY72	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY79	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY80	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY81	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY82	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY83	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY84	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY85	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY86	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY87	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY88	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY89	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY90	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY91	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY92	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY93	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY94	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY95	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY99	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F802A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F802B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F804A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F804B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F855A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F855B	3602-000114	FUSE-HOLDER;-,-,30mohm	
⚠ 4 FD805S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 4 FD806S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
⚠ 4 FD854S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 4 FD871S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
....4 GT801	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT802	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT810	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT811	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT812	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT813	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT814	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 L806	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L807	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L808	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L810	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L811	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L812	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L813	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L814	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L815	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L816	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L831	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L832	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L851	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L857	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L859	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 PCB	AA41-00342A	PCB-POWER;PCL545R,CEM-1,1L,A,1.6T,330X24	S.N.A
....4 Q801	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 R808	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R808A	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R812	2003-002170	R-METAL OXIDE(S);15Kohm,5%,2W,AG,TP,3.9x	
....4 R814	2003-002170	R-METAL OXIDE(S);15Kohm,5%,2W,AG,TP,3.9x	
....4 R815	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
....4 R815A	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
....4 R832	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R834	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R837	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R838	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R855	2001-001196	R-CARBON(S);9.1KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R871	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R872	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R873	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R874	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R875	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 4 RP801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 4 RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 4 RY801S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 4 VP801S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
⚠ 4 VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
...3	AA39-20009B	LEAD CONNECTOR-ASSY;,1P,YFH800-01,300,16	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
..2	AA94-07625H	ASSY PCB MAIN;HCL473WX/XAA,P54A,U.S.A	
...3 C664	2401-001068	C-AL;3300uF,20%,50V,GP,BK,22x40,10	
...3 C665	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
...3 CG-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3 CG-TOP	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3 CN01	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
...3 CN02	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
...3 CNM01	3703-001187	CONNECTOR-DIN;64P,2R,FEMALE,STRAIGHT,AU	
...3 CNS01	3703-001187	CONNECTOR-DIN;64P,2R,FEMALE,STRAIGHT,AU	
...3 CNT01	3710-001208	CONNECTOR-SOCKET;32P,2R,2.54mm,STRAIGHT,	
...3 CNT02	3710-001208	CONNECTOR-SOCKET;32P,2R,2.54mm,STRAIGHT,	
...3 CNZ01	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
...3 DW-BOT	AA63-00395B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3 DW-TOP	AA63-00394B	SHIELD CASE-TOP;PRJT P54A,SPTE,T0.5,-,-,	S.N.A
...3 IC102	AA96-00110C	ASSY-H/S;-,-,AA62-30013K,SI-3090C,-	S.N.A
....4	1203-000577	IC-VOLTAGE REGULATOR;3090,ZIP,5P,-,PLAST	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30013K	HEAT-SINK,ES;-,-,-,-,44/18,-,WHT,A6063 E	S.N.A
...3 IC104	AA96-00110A	ASSY-H/S;-,-,AA62-30013K,SI-3050C,-	S.N.A
....4	1203-000203	IC-POSI.ADJUST REG.;3050,TO-220,5P,-,PLA	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30013K	HEAT-SINK,ES;-,-,-,-,44/18,-,WHT,A6063 E	S.N.A
...3 IC106	AA96-00110A	ASSY-H/S;-,-,AA62-30013K,SI-3050C,-	S.N.A
...3 IC655	AA96-00038A	ASSY-H/S;-,SOUND AMP,AA62-30173E,TDA7265	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30173E	HEAT-SINK,ES;-,-,T1.0,WHITE,SCREW-HOLE(1	S.N.A
...3 ICZ101	AA96-50321B	ASSY-H/S;-,-,AA62-30013G,SI3050C,-	S.N.A
....4	1203-000203	IC-POSI.ADJUST REG.;3050,TO-220,5P,-,PLA	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30013G	HEAT-SINK,ES;-,AL,-,WHT,55(18),-,-,-	S.N.A
...3 ICZ102	1203-000119	IC-NEGA.FIXED REG.;7905,TO-220,3P,-,PLAS	
...3 L601	AA29-00004A	FILTER-LINE NOISE;-,20UH,3A,AC80-260V,TQ	
...3 L602	AA27-10001C	COIL-CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3 MI-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3 MI-TOP	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3 SO-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3 SO-TOP	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
⚠ ...3 TU103S	AA59-00164A	MODULE-RF,SPLITTER;-,UMX-NT-005,-,2IN/3O	
...3 WIRE	AA65-30018A	CLAMP-WIRE;DONG-A,NYLON-66,-,-,-,DATL-60	S.N.A
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	AA39-20010F	LEAD CONNECTOR-ASSY;,1P,YFH800-01,S,700,	
...3	AA95-01844K	ASSY SUB-PCB,SOUND;PCL545R,P54A,AA95-007	
....4 CN601	3703-001175	CONNECTOR-DIN;64P,2R,MALE,ANGLE,AU	
....4 XD601	2801-000186	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,8pF,	
....4	AA97-06988A	ASSY AUTO-SOUND;PCL545R,P54A,AA95-00712C	S.N.A
.....5 CD601	2401-000444	C-AL;10uF,20%,25V,GP,TP,5x5mm,5mm	
.....5 CD603	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 CD604	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
.....5 CD605	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 CD607	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 CD608	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 CD609	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 CD610	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 CD611	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 CD612	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 CD614	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
.....5 CD616	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
.....5 CD621	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD622	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD623	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD624	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD625	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD626	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
.....5 CD627	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD628	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD630	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
.....5 CD632	2401-000444	C-AL;10uF,20%,25V,GP,TP,5x5mm,5mm	
.....5 CD639	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 CD641	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 CD644	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD645	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD650	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 CD652	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 CD653	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD654	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD655	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 CD656	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD657	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD660	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD661	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD663	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 LD601	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
.....5 LD602	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
.....5 LD603	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
.....5	AA97-06895A	ASSY SMD-SOUND;PCL545R,P54A,AA95-00712C	S.N.A
......6 CD602	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD606	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD613	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD617	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
......6 CD618	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
......6 CD619	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
......6 CD620	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
......6 CD629	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 CD631	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD633	2203-000332	C-CERAMIC,CHIP;0.012nF,5%,50V,NP0,TP,160	
......6 CD634	2203-000332	C-CERAMIC,CHIP;0.012nF,5%,50V,NP0,TP,160	
......6 CD635	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
......6 CD636	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
......6 CD637	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
......6 CD638	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
......6 CD640	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD642	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 CD643	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 CD646	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 CD647	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 CD648	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 CD649	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 CD662	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD664	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 CD665	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 CD670	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
......6 CD678	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
......6 CD679	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
......6 ICD601	1204-001830	IC-SOUND PROCESSOR;MSP3452G-A2,QFP,80P,7	
......6 ICD602	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
......6 ICD603	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
......6 PCB	AA41-00335A	PCB-SOUND;PCL545R,FR-4,2L,A,1.6T,180X245	S.N.A
......6 QD601	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
......6 QD602	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
......6 RD601	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD602	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD603	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD604	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD605	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD606	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD607	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD608	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD609	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD610	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD611	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD612	2007-001010	R-CHIP;51Kohm,5%,1/16W,DA,TP,1608	
......6 RD613	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 RD614	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD615	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD616	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD617	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD618	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 RD619	2007-001179	R-CHIP;8.2Kohm,5%,1/16W,DA,TP,1608	
......6 RD620	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
......6 RD621	2007-001010	R-CHIP;51Kohm,5%,1/16W,DA,TP,1608	
......6 RD622	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
......6 RD623	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
......6 RD624	2007-001010	R-CHIP;51Kohm,5%,1/16W,DA,TP,1608	
......6 RD625	2007-001179	R-CHIP;8.2Kohm,5%,1/16W,DA,TP,1608	
......6 RD626	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
......6 RD627	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 RD628	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD629	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD630	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 RD631	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 RD632	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
......6 RD633	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
......6 RD634	2007-001179	R-CHIP;8.2Kohm,5%,1/16W,DA,TP,1608	
......6 RD635	2007-001179	R-CHIP;8.2Kohm,5%,1/16W,DA,TP,1608	
......6 RD636	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
......6 RD637	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
......6 RD638	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD639	2007-001010	R-CHIP;51Kohm,5%,1/16W,DA,TP,1608	
......6 RD647	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD648	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD649	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD650	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	AA95-01824C	ASSY SUB-PCB,MICOM;PCL545R,P54A,AA95-007	S.N.A
....4 CN901	3703-001175	CONNECTOR-DIN;64P,2R,MALE,ANGLE,AU	
....4 IC901	AA09-00199A	IC MICOM;SZM422A1-R519N,SZM422A1-R519N,5	
....4 IC902	1103-001213	IC-EEPROM;M24C16-WBN6,2048x8Bit,SDIP,8P,	
....4 L903	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
....4 X901	2801-003224	CRYSTAL-UNIT;32.768KHz,20ppm,28-AAY,12.5	
....4	AA97-05187A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
.....5 C901	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
.....5 C904	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C905	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 C906	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C907	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
.....5 C908	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
.....5 C909	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
.....5 C910	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
.....5 C911	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
.....5 C912	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C913	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
.....5 C914	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
.....5 C915	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C916	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
.....5 C917	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 C918	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C919	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
.....5 C920	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C925	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C926	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
.....5 C927	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
.....5 C928	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
.....5 F901	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 IC903	1203-001274	IC-VOL. DETECTOR;7545,TO-92,3P,-,PLASTIC	
.....5 IC904	1203-000515	IC-VOL. DETECTOR;7042,TO-92,3P,177MIL,PL	
.....5 L902	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.....5 L910	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L911	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L912	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L913	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.....5 Q901	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q902	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q903	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q909	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 Q910	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q911	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5	AA97-06149A	ASSY SMD-SUB;PCL545R,P54A	S.N.A
......6 C902	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C903	2203-000595	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,2012	
......6 C921	2203-000595	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,2012	
......6 D901	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 D902	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 D903	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 D904	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 D905	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 DZ903	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 DZ904	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 DZ905	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 DZ911	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
......6 DZ912	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
......6 DZ913	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
......6 DZ916	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 DZ917	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 DZ918	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 PCB	AA41-00338B	PCB-MICOM;PCL545R,FR-4,2L,B,1.6T,180X245	S.N.A
......6 R901	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R902	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 R903	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R904	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R905	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R907	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R908	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R911	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R912	2007-000076	R-CHIP;330ohm,5%,1/16W,DA,TP,1608	
......6 R913	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 R914	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R915	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R916	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
......6 R917	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
......6 R918	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
......6 R919	2007-000458	R-CHIP;18Kohm,5%,1/16W,DA,TP,1608	
......6 R920	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 R921	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
......6 R922	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
......6 R923	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R924	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R925	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
......6 R926	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
......6 R927	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
......6 R928	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
......6 R929	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
......6 R930	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R931	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R932	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R934	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R935	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R936	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R937	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R945	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	
......6 R946	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R947	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R948	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R949	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	
......6 R950	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R951	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	
......6 R958	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R959	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R960	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R961	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R962	2007-000098	R-CHIP;56Kohm,5%,1/16W,DA,TP,1608	
......6 R963	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	
......6 R964	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R965	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R967	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R968	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R969	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R971	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
......6 R972	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
......6 R973	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R974	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R976	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R977	2007-000305	R-CHIP;10Mohm,5%,1/16W,DA,TP,1608	
......6 R978	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R981	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
......6 R982	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
......6 R983	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3	AA95-01806C	ASSY SUB-PCB,DW-SRC;PCL545R,P54A,AA95-00	
....4 CN01	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
....4 CN02	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
....4 CX01	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
....4 DX01	2801-003811	CRYSTAL-UNIT;24.576MHZ,20PPM,28-AAM,30PF	
....4 PX01	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
....4	AA97-05338A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
.....5 CC17	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
.....5 CC19	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CC28	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CC32	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
.....5 CC42	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CC44	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CC45	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
.....5 DC16	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 DC17	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 DC19	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 DC27	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 DC39	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 DL07	2702-001092	INDUCTOR-RADIAL;2.2uH,10%,6x4mm	
.....5 IC12	1203-001140	IC-VOL. DETECTOR;7039,TO-92P,3P,-,PLASTI	
.....5 PC14	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
.....5 PC16	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 PC23	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 PC27	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
.....5 PC41	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 PC43	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 SC01	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 SC03	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 SC22	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
.....5 SC30	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 SC31	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 SC36	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 SC51	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 SC53	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 YC21	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 YC26	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 YC31	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
.....5 YC38	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
.....5 YC57	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 YC62	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 YL02	2702-000160	INDUCTOR-RADIAL;4.7uH,10%,6x6.4mm	
.....5	AA97-06191A	ASSY SMD-SUB;PCL545R,P54A	S.N.A
......6 CC01	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 CC02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CC03	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 CC04	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 CC05	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 CC06	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
......6 CC07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CC08	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
......6 CC09	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 CC10	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CC11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CC12	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CC13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CC14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CC15	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
......6 CC16	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
......6 CC18	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
......6 CC20	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 CC21	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 CC22	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
......6 CC23	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 CC24	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 CC25	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 CC26	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 CC27	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 CC29	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 CC30	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
......6 CC31	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
......6 CC33	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
......6 CC35	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 CC36	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 CC37	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
......6 CC38	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
......6 CC39	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
......6 CC40	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
......6 CC41	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
......6 CC43	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CC47	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CC48	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
......6 CC49	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
......6 CC50	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
......6 CC51	2203-000783	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,1608	
......6 CD01	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 CD02	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 CF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
......6 CF02	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
......6 CL03	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
......6 CL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 CL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 CL07	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 CQ01	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 CQ02	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 CQ03	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 CQ04	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 CQ05	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 CR01	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
......6 CR02	2007-000028	R-CHIP;39OHM,5%,1/10W,DA,TP,2012	
......6 CR03	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
......6 CR04	2007-000028	R-CHIP;39OHM,5%,1/10W,DA,TP,2012	
......6 CR05	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 CR06	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 CR07	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 CR08	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 CR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 CR10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 CR12	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 CR13	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 CR14	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 CR15	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
......6 CR16	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
......6 CR20	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 CR22	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 CR25	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
......6 CR27	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 CR28	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 CR29	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
......6 CR30	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
......6 CR31	2007-000643	R-CHIP;270ohm,5%,1/16W,DA,TP,1608	
......6 CR32	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
......6 CR33	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
......6 CR35	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 CR37	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 CR38	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 CR45	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 CR46	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 CR47	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 CR48	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 CR49	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 CR50	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 CR51	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 CR52	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 CR53	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 CR54	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 CR55	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 CR56	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
......6 DC18	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 DC20	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 DC21	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
......6 DC22	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
......6 DC23	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 DC24	2203-001656	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,1608	
......6 DC25	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 DC26	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 DC28	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
......6 DC29	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 DC30	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 DC31	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 DC32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 DC33	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 DC34	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
......6 DC35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 DC36	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
......6 DC37	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 DC38	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
......6 DD01	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 DD02	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 DD03	0403-001127	DIODE-ZENER;02DZ5.1,5.1,200mW,SOD-323,TP	
......6 DD06	0403-001127	DIODE-ZENER;02DZ5.1,5.1,200mW,SOD-323,TP	
......6 DD07	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 DL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 DL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 DQ01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 DR16	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 DR17	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 DR18	2007-000101	R-CHIP;82Kohm,5%,1/16W,DA,TP,1608	
......6 DR19	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 DR20	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
......6 DR22	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 DR23	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 DR24	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
......6 DR25	2007-000129	R-CHIP;27Kohm,5%,1/16W,DA,TP,1608	
......6 DR26	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 DR27	2007-000127	R-CHIP;9.1Kohm,5%,1/16W,DA,TP,1608	
......6 DR29	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 DR30	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 DR31	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 DR32	2007-000118	R-CHIP;390ohm,5%,1/16W,DA,TP,1608	
......6 DR33	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 DR34	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 DR35	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 DR36	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 DR37	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 DR38	2007-000079	R-CHIP;1.8Kohm,5%,1/16W,DA,TP,1608	
......6 DR40	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 DR41	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 DR44	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 DR46	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
......6 IC01	1204-001598	IC-VIDEO PROCESS;VPC3230D-B2,QFP,80P,-,P	
......6 IC02	1204-001623	IC-VERTICAL PROCESSO;SDA9400,QFP,64P,-,P	
......6 IC03	1002-001045	IC-D/A CONVERTER;9280,8BIT,PLCC,68P,-,-,	
......6 IC06	1204-001372	IC-HOR./VER.PROCESSO;SDA9361,QFP,44P,-,P	
......6 IC07	1204-001550	IC-VIDEO PROCESS;CXA2101AQ,QFP,80P,-,PLA	
......6 IC11	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
......6 IC13	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
......6 PC01	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 PC02	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 PC03	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
......6 PC04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC05	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
......6 PC06	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 PC07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC09	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC10	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC12	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
......6 PC13	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
......6 PC15	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
......6 PC17	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 PC18	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 PC19	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
......6 PC20	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 PC21	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 PC22	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 PC24	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 PC25	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 PC26	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
......6 PC28	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
......6 PC29	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC30	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC31	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
......6 PC32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC33	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC34	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC36	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC37	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC38	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC39	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC40	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC42	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC47	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
......6 PC48	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
......6 PC49	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
......6 PC52	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 PC53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC54	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 PC55	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 PC56	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 PC57	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 PC58	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 PC78	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PCB	AA41-00418C	PCB-DW;SP55W3HR,FR-4,4L,C,1.6T,245X245,J	S.N.A
......6 PIC01	1204-001598	IC-VIDEO PROCESS;VPC3230D-B2,QFP,80P,-,P	
......6 PIC02	1109-001144	IC-FIFO;81V04160,2x256Kx8Bit,TQFP,100P,1	
......6 PIC04	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
......6 PL01	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 PL02	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 PR01	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
......6 PR02	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
......6 PR03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 PR04	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 PR06	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 PR07	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 PR08	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 PR11	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
......6 PR12	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
......6 PR19	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
......6 PR20	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
......6 SC02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC05	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC06	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC09	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC12	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC23	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC24	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC25	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 SC26	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
......6 SC27	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC28	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
......6 SC29	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC33	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
......6 SC34	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC37	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC38	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
......6 SC52	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
......6 SL01	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 SL02	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 SL03	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 SL04	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 SL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 SL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 SL08	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 SL09	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
......6 SR01	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 SR02	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 SR03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 SR04	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
......6 SR05	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
......6 SR06	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
......6 SR07	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
......6 SR08	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 SR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 SR11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 SR12	2007-001056	R-CHIP;6.2Kohm,5%,1/16W,DA,TP,1608	
......6 SR13	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
......6 SR14	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 SR15	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 SR16	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
......6 SR17	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 SR18	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 SR19	2007-000381	R-CHIP;13Kohm,5%,1/16W,DA,TP,1608	
......6 SR21	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
......6 SR22	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 SR23	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 SR24	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 SR25	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP,2012	
......6 YC01	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC02	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC03	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC04	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC05	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC06	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC07	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC08	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC09	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC10	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC11	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC12	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC13	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC14	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC15	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC16	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC17	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC18	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC19	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC20	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC22	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC23	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 YC24	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC25	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC27	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 YC28	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 YC29	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 YC30	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC32	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 YC33	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 YC34	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 YC35	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 YC36	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 YC37	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 YC39	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
......6 YC40	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
......6 YC45	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC46	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 YC47	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 YC48	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 YC49	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC50	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC51	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
......6 YC52	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
......6 YC53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC55	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC56	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC58	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC59	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC60	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC63	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
......6 YC66	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
......6 YD01	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
......6 YD02	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
......6 YD03	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
......6 YD04	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	

Loc. No.	Code No.	Description ; Specification	Remark
......6 YD05	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
......6 YF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
......6 YF02	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
......6 YF03	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
......6 YF04	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
......6 YF05	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
......6 YL01	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
......6 YQ01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 YQ02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 YQ03	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 YQ06	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 YQ08	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 YQ11	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 YQ12	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 YR05	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR06	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR07	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR08	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR100	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR101	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR102	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR103	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 YR104	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
......6 YR105	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
......6 YR11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR12	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR14	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 YR15	2007-000939	R-CHIP;47Kohm,1%,1/16W,DA,TP,1608	
......6 YR18	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR23	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 YR24	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 YR25	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR26	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR27	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR28	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR29	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
......6 YR30	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR31	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
......6 YR32	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR33	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
......6 YR40	2007-000691	R-CHIP;3.3Mohm,5%,1/16W,DA,TP,1608	
......6 YR41	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR43	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
......6 YR44	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
......6 YR45	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
......6 YR46	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR47	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR48	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR50	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
......6 YR51	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR53	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR56	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR59	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
......6 YR60	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR61	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 YR62	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 YR63	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR64	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR65	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
......6 YR77	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
......6 YR78	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
......6 YR79	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
......6 YR83	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR85	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR86	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR88	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 YR89	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 YR90	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR91	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR92	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR98	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 YR99	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3	AA97-03130A	ASSY ROBOT-MAIN;HCL473WX/XAA,P54A,U.S.A	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 CN201	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
....4 CN501	3711-003051	CONNECTOR-HEADER;BOX,8P,1R,2.5MM,STRAIGH	
....4 CN801	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
....4 CN901	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
....4 CNZ02	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
....4 IC103	AA96-50147B	ASSY-H/S;-,TR,AA62-30012B,KA7808,-	S.N.A
.....5	1203-000293	IC-POSI.FIXED REG.;7808,TO-220,3P,-,PLAS	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30012B	HEAT-SINK,ES;-,A6063 EXTR,-,-,45(16) T02	S.N.A
....4 IC107	AA96-00111L	ASSY-H/S;-,-,AA62-30013L,KA78R12,-	S.N.A
.....5	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30013L	HEAT-SINK,ES;-,-,-,-,44/22,-,WHT,-,-,-,-	S.N.A
⚠ 4 TU101S	AA40-00032A	TUNER-F/S;TCPN3081PC09A(S),NTSC,TR,181CH	
⚠ 4 TU102S	AA40-00032A	TUNER-F/S;TCPN3081PC09A(S),NTSC,TR,181CH	
....4	AA97-04483A	ASSY AUTO-MAIN;HCL473WX/XAA,P54A,U.S.A	S.N.A
.....5 C100	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
.....5 C101	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
.....5 C102	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
.....5 C103	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C104	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
.....5 C105	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C106	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C107	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C110	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C111	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
.....5 C117	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C118	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C119	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C120	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C121	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C122	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C123	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C124	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C125	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C126	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C127	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C128	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C129	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C130	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C131	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C132	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C133	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C134	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C135	2401-003034	C-AL;220uF,20%,16V,WT,TP,8x11.5,5	
.....5 C136	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C137	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
.....5 C138	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
.....5 C140	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C142	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C144	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C145	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C147	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C149	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C150	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C151	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C152	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C153	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C154	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C155	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C157	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C191	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C666	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C667	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
.....5 C668	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
.....5 C669	2401-000404	C-AL;10uF,20%,16V,BP,TP,5x11,5	
.....5 C676	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
.....5 C686	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
.....5 C687	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
.....5 C688	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
.....5 C689	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C690	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C691	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
.....5 C701	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C801	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
.....5 C901	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
.....5 C902	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C903	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 CN101	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
.....5 CN601	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
.....5 CN602	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
.....5 CN902	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
.....5 CNY01	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
.....5 CZ101	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
.....5 CZ102	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 CZ103	2401-000689	C-AL;2200uF,20%,16V,GP,TP,13x25,5	
.....5 CZ105	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 CZ106	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 CZ107	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 CZ109	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 CZ110	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 D603	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D604	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D605	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D606	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D664	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 D665	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D701	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D702	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D703	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 DZ665	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
.....5 DZ701	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
.....5 DZ801	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
.....5 EL01	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL02	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL03	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL05	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL06	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL07	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL08	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL09	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL10	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL11	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL12	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL13	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL14	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL15	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL16	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL17	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL18	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL19	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL20	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL21	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL22	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL23	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL24	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL25	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL26	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL27	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL28	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL29	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL30	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL31	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL32	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EY01	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY02	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY03	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY04	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY05	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY06	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY07	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY08	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY09	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY10	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY11	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY12	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY13	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY14	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 GTM02	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
.....5 GTM04	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
.....5 L100	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
.....5 L101	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
.....5 L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L104	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L105	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L107	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L108	2701-001007	INDUCTOR-AXIAL;24uH,10%,4.5x14mm	
.....5 L110	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
.....5 L111	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L112	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L113	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L603	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L604	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L605	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L901	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 LDZ101	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
.....5 LDZ102	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
.....5 LZ101	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
.....5 LZ102	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
.....5 LZ103	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
.....5 LZ104	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
.....5 PCB	AA41-00332D	PCB-MAIN;PCL545R,FR-1,1L,D,1.6T,330X245,	S.N.A
.....5 Q601	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q666	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q668	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q702	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 R102	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R103	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R104	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R105	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R106	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R107	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R110	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R111	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R112	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R113	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R115	2001-000869	R-CARBON;56OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R117	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R602	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R603	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R604	2001-001168	R-CARBON(S);6.8KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R605	2001-001106	R-CARBON(S);220KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R661	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
.....5 R662	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
.....5 R663	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R664	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
.....5 R665	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R666	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R669	2001-001121	R-CARBON(S);3.6KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R670	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R671	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R672	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R673	2001-001086	R-CARBON(S);18KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R673A	2001-001142	R-CARBON(S);3KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R681	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
.....5 R682	2004-002019	R-METAL(S);33Kohm,1%,1/2W,AA,TP,2.5x6.5m	
.....5 R683	2004-002019	R-METAL(S);33Kohm,1%,1/2W,AA,TP,2.5x6.5m	
.....5 R685	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
.....5 R686	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
.....5 R687	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R689	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R690	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R691	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R701	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R702	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R703	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R704	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R888	2003-001098	R-METAL OXIDE(S);22Kohm,5%,3W,AA,TP,6x16	
.....5 RF101	2008-001116	R-FUSIBLE(S);0.68ohm,10%,2W,AG,TP,3.9x12	
.....5 RF104	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
.....5 RF121	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 RZ01	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 RZ02	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ101	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ102	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	AA39-20577B	LEAD CONNECTOR ASSY;P54A/SVP-55W3HD,UL16	
...3	AA65-30018A	CLAMP-WIRE;DONG-A,NYLON-66,-,-,-,DATL-60	S.N.A
...3	AA59-00218A	MODULE;SVP-5200,F301-P03,BK	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
...3	AA95-01799R	ASSY SUB-PCB,CONV MDL;SVP-54T6SR,P54A,AA	
....4 CN01	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
....4 CN04	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
....4 L01	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
....4	AA97-06265A	ASSY SMD-SUB;SVP-54T6SR,P54A	S.N.A
.....5 C01	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C03	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C05	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C07	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C10	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C12	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C15	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C17	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C18	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C19	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....5 C20	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C22	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C23	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C24	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C25	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C26	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C27	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C28	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C29	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C30	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C31	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C33	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C34	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C36	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C40	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C41	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C42	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C43	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C44	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C45	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C46	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
.....5 C47	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
.....5 C48	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
.....5 C49	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C50	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
.....5 C51	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
.....5 C52	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
.....5 C53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C54	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
.....5 C55	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
.....5 C56	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
.....5 C57	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C58	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C59	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
.....5 C60	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
.....5 C61	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
.....5 C62	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C63	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
.....5 C64	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
.....5 C65	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
.....5 C66	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C67	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
.....5 C68	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
.....5 C69	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
.....5 C70	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.....5 C71	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.....5 C72	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.....5 C73	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.....5 C74	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C75	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C76	2203-001034	C-CERAMIC,CHIP;5.6nF,10%,50V,X7R,TP,1608	
.....5 C77	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C78	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C79	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C80	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C81	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C82	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C83	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C84	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C86	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C87	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C88	2203-001245	C-CERAMIC,CHIP;0.082nF,5%,50V,NP0,TP,201	
.....5 C89	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C90	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....5 C91	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C92	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C93	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 D01	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D02	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D03	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D04	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D05	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 DZ01	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.....5 DZ02	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.....5 DZ03	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.....5 DZ04	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.....5 EF01	2901-000229	FILTER-EMI SMD;50V,0.3A,-,22000pF,4.5x3.	
.....5 EF02	2901-000229	FILTER-EMI SMD;50V,0.3A,-,22000pF,4.5x3.	
.....5 EF03	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
.....5 EF04	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 EF05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 EF06	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
.....5 EF07	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 EF08	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 EF09	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 EF10	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 EF13	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
.....5 EF14	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
.....5 IC01	AA13-00104A	IC ASIC;SDC11,SVP-54T6SR,208P,-0.3VTO3.8	
.....5 IC02	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
.....5 IC04	1203-001824	IC-VOL. DETECTOR;7042,SOT-89,3P,-,PLASTI	
.....5 IC05	1103-000180	IC-EEPROM;24C16,2Kx8Bit,SOP,8P,150MIL,10	
.....5 IC06	AA09-00032A	IC-MCU;,TSC87251G2D-OTP,4.5 TO 5.5V,-,32	
.....5 IC08	1201-001520	IC-VIDEO AMP;EL2250CS,SOIC,8P,150MIL,DUA	
.....5 IC09	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	
.....5 IC10	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....5 IC11	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....5 IC12	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....5 IC13	1201-001135	IC-OP AMP;324,SOP,ST,14P,150MIL,QUAD,100	
.....5 IC14	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....5 IC15	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....5 IC16	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....5 IC17	1209-001163	IC-PLL;TLC2932IPWLE,SOP,14P,-,PLASTIC	
.....5 OSC01	2804-001479	OSCILLATOR-CLOCK;24MHZ,100PPM,50PF,TP,5V	
.....5 PCB	AA41-00529A	PCB-CONVERGENCE MODULE;SVP-54T6SR,FR-4,4	S.N.A
.....5 Q01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5 Q02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5 R01	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R02	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R04	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R10	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R100	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.....5 R101	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.....5 R102	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.....5 R103	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.....5 R109	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.....5 R11	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R110	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R111	2007-000102	R-CHIP;100Kohm,5%,1/16W,DA,TP,1608	
.....5 R117	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R118	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
.....5 R119	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
.....5 R12	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R120	2007-000856	R-CHIP;4.3KOHM,1%,1/10W,DA,TP,2012	
.....5 R121	2007-000109	R-CHIP;1Mohm,5%,1/16W,DA,TP,1608	
.....5 R122	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R123	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R124	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R125	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R126	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R127	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R13	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R134	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R14	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R15	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R16	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R17	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
.....5 R18	2007-000381	R-CHIP;13Kohm,5%,1/16W,DA,TP,1608	
.....5 R19	2007-001056	R-CHIP;6.2Kohm,5%,1/16W,DA,TP,1608	
.....5 R20	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
.....5 R21	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R22	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R23	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R28	2007-001163	R-CHIP;75OHM,1%,1/10W,DA,TP,2012	
.....5 R29	2007-001163	R-CHIP;75OHM,1%,1/10W,DA,TP,2012	
.....5 R30	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
.....5 R32	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
.....5 R33	2007-000028	R-CHIP;39OHM,5%,1/10W,DA,TP,2012	
.....5 R34	2007-000028	R-CHIP;39OHM,5%,1/10W,DA,TP,2012	
.....5 R37	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R38	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R39	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R40	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R41	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R42	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R43	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R44	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R45	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R46	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R47	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R48	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R49	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
.....5 R50	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R51	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R52	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R53	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R54	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
.....5 R55	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R56	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R57	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R58	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R59	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
.....5 R60	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R61	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R62	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R63	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R64	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
.....5 R65	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R66	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R67	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R68	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R69	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
.....5 R70	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R71	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R72	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R73	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R74	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
.....5 R75	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R77	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 R78	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 R79	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 R80	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 R81	2007-000757	R-CHIP;330KOHM,5%,1/10W,DA,TP,2012	
.....5 R82	2007-000757	R-CHIP;330KOHM,5%,1/10W,DA,TP,2012	
.....5 R83	2007-000757	R-CHIP;330KOHM,5%,1/10W,DA,TP,2012	
.....5 R84	2007-000757	R-CHIP;330KOHM,5%,1/10W,DA,TP,2012	
.....5 R85	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R86	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R87	2007-000704	R-CHIP;3.6Kohm,5%,1/16W,DA,TP,1608	
.....5 R88	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R89	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 R90	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 R91	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 R92	2007-000125	R-CHIP;3.9Kohm,5%,1/16W,DA,TP,1608	
.....5 R93	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R94	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R95	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.....5 RN01	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
.....5 RN02	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
.....5 RN03	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
.....5 RN04	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
.....5 RN05	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
.....5 RN08	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
...3	AA95-01793A	ASSY SUB-PCB,CAPTION;PCL545R,P54A,AA95-0	
....4 BK01	AA61-10068A	BRACKET-PCB;M2160,SPTE,T0.3,-,-,-,-	S.N.A
....4 CNC01	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5mm,ANG	
....4 CNC02	3711-002708	CONNECTOR-HEADER;NOWALL,10P,1R,2.5mm,ANG	
....4 ICC01	1204-001718	IC-DECODER;Z86129,DIP,18P,300MIL,PLASTIC	
....4 ICC02	1001-001083	IC-VIDEO SWITCH;NJM2248D,-,DIP,8P,300MIL	
....4 ICC03	1001-001083	IC-VIDEO SWITCH;NJM2248D,-,DIP,8P,300MIL	
....4	AA97-05186A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
.....5 CC01	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
.....5 CC02	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 CC03	2201-000600	C-CERAMIC,DISC;0.56nF,10%,50V,Y5P,TP,5x3	
.....5 CC04	2401-000223	C-AL;100nF,20%,50V,LL,TP,5x11mm,5mm	
.....5 CC05	2301-000310	C-FILM,PEF;68nF,5%,50V,TP,8.0X8.5X4.0X5,	
.....5 CC06	2301-000301	C-FILM,PEF;6.8nF,5%,50V,TP,6.5X5.5X3.0X5	
.....5 CC07	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 CC08	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 CC09	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 CC10	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
.....5 CC11	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
.....5 CC12	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
.....5 CC13	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 CC14	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 CC15	2201-000600	C-CERAMIC,DISC;0.56nF,10%,50V,Y5P,TP,5x3	
.....5 CC16	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 CC19	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 DC01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 DC02	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 DC03	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 LC01	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 PCB	AA41-00337A	PCB-CAPTION;PCL545R,FR-1,1L,A,1.6T,245X2	S.N.A
.....5 QC01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 QC02	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 RC01	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
.....5 RC02	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
.....5 RC03	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC04	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC05	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC06	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC07	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC08	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC09	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC10	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
.....5 RC11	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC12	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC13	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC14	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC15	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC16	2004-000218	R-METAL;10Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
.....5 RC17	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC18	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC19	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC20	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC21	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC22	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC23	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC24	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC25	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
.....5 RC30	2001-000708	R-CARBON;39OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	AA95-01746A	ASSY SUB-PCB 3D COMB;WT-32Z5HD,K54A,AA95	
....4 CON01	3711-002705	CONNECTOR-HEADER;NOWALL,7P,1R,2.5mm,ANGL	
....4 CON02	3711-002703	CONNECTOR-HEADER;NOWALL,5P,1R,2.5mm,ANGL	
....4 XTAL01	2801-000199	CRYSTAL-UNIT;20MHz,50ppm,28-AAA,16pF,50o	
....4	AA63-40014A	SHIELD-CASE,T;-,SPTE,T0.5,-,-,-,SCT51A	S.N.A
....4	AA97-07193A	ASSY AUTO-3D COMB;WT-32Z5HD,K54A,AA95-00	S.N.A
.....5 CD10	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CD12	2401-002464	C-AL;47uF,20%,16V,BP,TP,8x11.5,5	
.....5 CD18	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
.....5 CD23	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 CD24	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 CD40	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
.....5 CD45	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
.....5 CD47	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
.....5 CD57	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CD59	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CD60	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CD64	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CD66	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CD68	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CD71	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 LD01	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
.....5 LD03	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
.....5 LD05	2702-001096	INDUCTOR-RADIAL;33uH,10%,6x4mm	
.....5 LD06	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
.....5 LD07	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5	AA97-06948A	ASSY SMD-3D COMB;WT-32Z5HD,K54A,AA95-009	S.N.A
......6 CD11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD20	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD22	2203-001034	C-CERAMIC,CHIP;5.6nF,10%,50V,X7R,TP,1608	
......6 CD41	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD42	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD43	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD44	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD46	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD50	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD51	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD52	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD55	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD56	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD58	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD62	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD63	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD67	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD69	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD72	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD74	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD75	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	
......6 CD80	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
......6 CD81	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD84	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD85	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
......6 CD86	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD87	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD88	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	
......6 CD89	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	
......6 CD90	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD91	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 DD01	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 DD02	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 DD03	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 FD00	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
......6 FD01	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
......6 FD02	2909-001052	FILTER-LC;3.58MHz,3MHz,1.5dB,TP,11dB/1.0	
......6 FD03	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
......6 IC01	1204-001556	IC-SEPARATOR;UPD64082GF,QFP,100P,-,PLAST	
......6 IC02	1105-001334	IC-DRAM;4E151612,1Mx16Bit,TSOP,44P,400MI	
......6 IC04	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
......6 JD01	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
......6 JD04	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
......6 LD09	2703-000271	INDUCTOR-SMD;4.7uH,10%,2x1.25x1.25mm	
......6 LD10	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
......6 PCB	AA41-00128E	PCB-3D COMB FILTER;CT-29A7DR,FR-4,2L,E,1	S.N.A
......6 QD10	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 QD11	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 QD12	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 QD13	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 QD14	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 QD15	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 QD16	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 QD17	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 QD18	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 QD19	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 QD20	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 QD21	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 QD22	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 QD23	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 QD24	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 QD25	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 QD26	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 QD27	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 QD28	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 QD40	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 QD41	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 RD00	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD01	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD02	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
......6 RD03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD04	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
......6 RD05	2007-000088	R-CHIP;7.5Kohm,5%,1/16W,DA,TP,1608	
......6 RD06	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD07	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD08	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
......6 RD09	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
......6 RD10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD12	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
......6 RD13	2007-000088	R-CHIP;7.5Kohm,5%,1/16W,DA,TP,1608	
......6 RD14	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
......6 RD15	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD16	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
......6 RD17	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
......6 RD18	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD19	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
......6 RD20	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	
......6 RD21	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
......6 RD22	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD23	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
......6 RD24	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 RD25	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
......6 RD26	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 RD27	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 RD37	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	
......6 RD38	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD39	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD40	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
......6 RD41	2007-000052	R-CHIP;10Kohm,1%,1/16W,DA,TP,1608	
......6 RD42	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
......6 RD43	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
......6 RD50	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD51	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD59	2007-000102	R-CHIP;100Kohm,5%,1/16W,DA,TP,1608	
......6 RD62	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
......6 RD63	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
......6 RD64	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD65	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD66	2007-000096	R-CHIP;30Kohm,5%,1/16W,DA,TP,1608	
......6 RD67	2007-000125	R-CHIP;3.9Kohm,5%,1/16W,DA,TP,1608	
......6 RD68	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
......6 RD69	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 RD70	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 RD71	2007-000234	R-CHIP;1.3Kohm,5%,1/16W,DA,TP,1608	
......6 RD72	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 RD73	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD74	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 RD75	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD76	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD77	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD78	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD79	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD82	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
......6 RD83	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
......6 RD84	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
......6 RD85	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
......6 RD86	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 RD87	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 RD88	2007-000211	R-CHIP;1.1Kohm,5%,1/16W,DA,TP,1608	
......6 RD89	2007-000113	R-CHIP;33ohm,5%,1/16W,DA,TP,1608	
......6 RD90	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD91	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 RD92	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD93	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
......6 RD94	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
......6 RD95	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD96	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 RD97	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 RD98	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3	AA65-30105B	CLAMP-WIRE;ALL MODEL,NYLON 66,V2,-,NTR,2	S.N.A
...3	AA65-30104B	CLAMP-WIRE;ALL MODEL,NYLON 66,V2,-,BLK,W	S.N.A
..2	AA94-08602A	ASSY PCB MISC-A/V FRONT;,HCM653WX/XAA,P5	
...3 CNY01A	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
...3 CNY702	3711-000447	CONNECTOR-HEADER;3WALL,3P,1R,2.5mm,ANGLE	
...3 CNYW01	AA39-00257A	LEAD CONNECTOR ASSY;,12P,67096-012,S,120	
...3 CNYW02	AA39-00260B	LEAD CONNECTOR ASSY;,UL1007#26,UL/CSA,3P	
...3 JK101	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
...3 JK102	3722-001164	JACK-PIN;3P,3.4mm,SN,WH:YE:RE,#16-22	
...3 SW101	3404-000208	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
...3	AA91-00762D	ASSY-JACK,SIDE;,P54A PAL XAA,W3	
....4	AA61-00793C	HOLDER-JACK;W3,ABS HB,BLK,DG703P	
....4	AA64-02085D	DOOR-AV;W3,ABS HB,BLK,DG703P	
....4	AA64-02086E	INLAY-AV;W3,PS SHEET,T0.5,P55A	S.N.A
...3	AA97-07147A	ASSY AUTO-A/V FRONT;HCL473WX/XAA,P54A,AA	S.N.A
....4 PCB	AA41-00499A	PCB-FRONT A/V;SVP-54T6SR,FR-1,1L,A,1.6T,	S.N.A
....4 RK101	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	

ASSY PRT

Loc. No.	Code No.	Description ; Specification	Remark
1 *	BP91-00022A	ASSY PRT;HCL652WX/XAA	S.N.A
..2	AA91-02201B	ASSY CPT-G;P16LSG03HKA,55,+380MGDELTA 2	
...3 BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3	AA61-00807B	CASE-COUPLER,G;PROJ,ALDC,T8,BLK	S.N.A
...3	AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3	AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
....4	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
....4	AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
....4	AA61-00812A	SPRING-WIRE;PROJ,STS,3.6	S.N.A
...3	AA67-00158A	LENS;,DELTA 240,GREEN,C-ELEMENT	
...3	AA67-00146A	LENS-ASSY;,DELTA 260,CLEAR A/B	
...3	AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	S.N.A
...3	AA26-30006F	TRANS-FLYBACK;-,FWZ-50A001C,55',30KV	
...3	AA03-00201A	CDT MONO;P16LSG03HKA,FREE,3.30mH,2.20mH,	
...3	AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3	AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3	AA60-00074A	SPACER-DY;PJT,SILICON RUBBER,-,-,-,GRAY,	S.N.A
...3	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3	AA27-00151A	DEFLECTION YOKE;-,CDY-PT0702(X),PRT,P16L	
..2	AA91-02204A	ASSY CPT-B;P16LSG03BMB,65,+380MG,DELTA	
...3 BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	S.N.A
...3	AA61-00808B	CASE-COUPLER,B;PROJ,ALDC,T8,BLK	S.N.A
...3	AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3	AA60-00128B	SPACER-CRT;PROJ(65),SILICONE,D/GRAY	S.N.A
...3	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
....4	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
....4	AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
....4	AA61-00812A	SPRING-WIRE;PROJ,STS,3.6	S.N.A
...3	AA67-00156A	LENS;,DELTA 240,CLEAR,C-ELEMENT	
...3	AA67-00146A	LENS-ASSY;,DELTA 260,CLEAR A/B	
...3	AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3	AA61-00811B	HOLDER-CRT;PROJ(65),PC/ABS GF 20%,BLK	S.N.A
...3	AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3	AA26-30006F	TRANS-FLYBACK;-,FWZ-50A001C,55',30KV	
...3	AA03-00202A	CDT MONO;P16LSG03BMB,FREE,3.30mH,2.20mH,	
...3	AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3	AA60-00074A	SPACER-DY;PJT,SILICON RUBBER,-,-,-,GRAY,	S.N.A
...3	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3	AA33-00008A	MAGNET CONVERGENCE;JH92LTU-36A,7inchPRT,	
...3	AA27-00151A	DEFLECTION YOKE;-,CDY-PT0702(X),PRT,P16L	

Loc. No.	Code No.	Description ; Specification	Remark
..2	AA91-02204B	ASSY CPT-R;P16LSG03RJA,65,+380MGDELTA 2	
...3 BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	S.N.A
...3	AA61-00806B	CASE-COUPLER,R;PROJ,ALDC,T8,BLK	S.N.A
...3	AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3	AA60-00128B	SPACER-CRT;PROJ(65),SILICONE,D/GRAY	S.N.A
...3	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
....4	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
....4	AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
....4	AA61-00812A	SPRING-WIRE;PROJ,STS,3.6	S.N.A
...3	AA67-00157A	LENS;,DELTA 240,RED,C-ELEMENT	
...3	AA67-00146A	LENS-ASSY;,DELTA 260,CLEAR A/B	
...3	AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3	AA61-00811B	HOLDER-CRT;PROJ(65),PC/ABS GF 20%,BLK	S.N.A
...3	AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3	AA26-30006F	TRANS-FLYBACK;-,FWZ-50A001C,55',30KV	
...3	AA03-00200A	CDT MONO;P16LSG03RJA,FREE,3.30mH,2.20mH,	
...3	AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3	AA60-00074A	SPACER-DY;PJT,SILICON RUBBER,-,-,-,GRAY,	S.N.A
...3	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3	AA33-00008A	MAGNET CONVERGENCE;JH92LTU-36A,7inchPRT,	
...3	AA27-00151A	DEFLECTION YOKE;-,CDY-PT0702(X),PRT,P16L	

ASSY COVER FRONT

Loc. No.	Code No.	Description ; Specification	Remark
1 *	BP90-00001A	ASSY COVER FRONT;65W3,HCM653WX/XAA	S.N.A
..2 AP+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2 ASP+CW	6005-001004	SCREW-WOOD;HH,+,M4,L27,BLK,SWRCH18A	
..2 BCM+CW	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL)	S.N.A
..2 CBB+AP	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	S.N.A
..2 CBB+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
..2 CFB+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
..2 FP+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2 HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
..2 HM+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	
..2 HV+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	AA91-00754D	ASSY-C/FRONT,MASK;ABS HB,DG703P,65W3(HCM	
...3	AA64-02246B	BADGE-BRAND;55W3,AL FORGING,L78,DG703P,S	S.N.A
...3	AA64-02078E	CABINET-FRONT,MASK,BOT;65W3,ABS HB,GRAY,	S.N.A
....4	AA64-02078A	CABINET-FRONT,MASK,BOT;65W3,ABS HB,GRAY,	S.N.A
...3	AA64-02077E	CABINET-FRONT,MASK,TOP;65W3,ABS HB,GRAY,	S.N.A
....4	AA64-02077A	CABINET-FRONT,MASK,TOP;65W3,ABS HB,L1441	S.N.A
...3	AA64-02060E	CABINET-FRONT,MASK(L);65W3,ABS HB,GRAY,D	S.N.A
...3	AA64-02060D	CABINET-FRONT,MASK(L);65W3,ABS HB,GRAY,D	S.N.A
...3	AA63-00380A	COVER-CORNER;PJT,POLYESTER,-,-,-,-,CLR,#	S.N.A
...3	AA63-00063A	SPACER-DUAL,LOCK;SVP-614J,#400,-,-,-,-,-	S.N.A
..2	AA73-00005B	RUBBER-CAP;FLAT,PRJ,SILICONE RUBBER,WHIT	
..2	AA67-00164A	MIRROR-FRONT;65W3,GLASS ,1177*891*614,FS	
..2	AA67-00133A	SUN SCREEN-AG;65W,-,T=82%,1468*864*2,-,-	
..2	AA91-00757C	ASSY-DOOR,RACK;,HB GRAY,SS1028+DG703P,W3	
...3 AHD+DR	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	S.N.A
...3 DR+BD	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	S.N.A
...3	AA64-02206B	WINDOW-DOOR;W3,GLASS,T3.0,BR	
...3	AA73-00007B	RUBBER-CAP;W3,MBR,GRAY,60	
...3	AA91-00758A	ASSY-HINGE,DOOR(R);SPRING,SECC T1.6 W3,W	
...3	AA64-02066E	DOOR-RACK;47.55.65W3,HIPS HB,GRAY,SS1028	
...3	AA61-00856B	BRACKET-DOOR;47W3,SECC,T1.0,BLK	S.N.A
...3	AA61-00782B	BRACKET-MAGNET;W3,SPC,T2.0,FZW	S.N.A
..2	AA91-00761C	ASSY-CABINET,WOOD;,WOOD,MIJU,65W3	
...3 B+FRAM	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 CAS+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 HCM+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 HCW+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 HM+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 HW+CW	AA60-10051B	SCREW-WOOD;-,SWRCH18A,M3.5,L11,RH,+,-,-,	S.N.A
...3 RAIL+R	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 SID+DO	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 SPK+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3	AA64-02209C	CABINET-WOOD;65W3,WOOD,MIJU	S.N.A
...3	AA63-00348B	COVER-DUCT;54,62J8,HIPS,-,-,-,HB,BLK,-	S.N.A
...3	AA63-00193B	COVER-AIRVENT;533R,HIPS,-,-,-,VO,BLK,-	S.N.A
...3	AA61-20219A	HOLDER-FRONT,BOT,E;,ABS,HB,L40,BLK	S.N.A
...3	AA61-10387A	BRACKET-GRILLE;SVP-462J,SECC-1,T0.5,-,-,	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
...3	AA61-01117A	HOLDER-SENSOR,SIDE;W3,ABS HB,G3676,SIDE	S.N.A
...3	AA61-01070A	HOLDER-CABINET,BOT(D);W3,ABS HB,L990,BLK	S.N.A
...3	AA61-01067A	HOLDER-CABINET,BOT(A);W3,ABS HB,L40,BLK,	S.N.A
...3	AA61-00999A	HOLDER-DUAL,LOCK;W3,W1,ABS HB,BLK	S.N.A
...3	AA64-02319A	CABINET-HANDLE,WOOD;65W3,ABS HB,BLK	
...3	AA98-00049B	ASSY-LEAD,CON;-,LEAD-CON,CORE,AA39-20505	S.N.A
....4	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	AA61-00508D	HOLDER-JERSEY;W3,ABS V0,GRAY,G4309	S.N.A
...3	BP61-00075A	HOLDER-JERSEY,ASSY;W3,ABS V0,GRAY,63-000	S.N.A
....4	AA63-00099C	SPACER-FELT;47W3,FELT,BLK,T0.35,30*30	S.N.A
....4	AA61-00508D	HOLDER-JERSEY;W3,ABS V0,GRAY,G4309	S.N.A
...3	AA39-00287B	LEAD CONNECTOR ASSY;PCL54RX,UL2547#26,UL	
...3	AA61-00973D	HOLDER-SCREEN,L;65W3,ABS HB,BLK	S.N.A
...3	AA61-00971D	HOLDER-SCREEN,TB;65W3,ABS HB,L1262,BLK	
...3	AA91-00750A	ASSY-MAGNET,PUSH;,MAGNET,W3	
...3	AA65-00017A	CLAMP CORE-WIRE;ALL MODEL,NYLON6.6,BLK	S.N.A
...3	AA61-00864A	HOLDER-PCB;W3,HIPS,V0,BLK	S.N.A
...3	AA61-00097A	HOLDER-WIRE;-,NYLON 6/6,-,-,-,NTR,-	S.N.A
...3	AA61-00094C	HOLDER-RAIL;PCJ533R,ABS,-,-,-,BLK,HB,480	S.N.A
...3	AA60-00134A	SPACER-COVER,DUST;65W3,SPONGE,T2.0,94HF-	S.N.A
...3	AA60-00078B	SPACER-DUAL,LOCK;W3,#250,19*40	S.N.A
...3	AA39-00042C	LEAD CONNECTOR-ASSY;,1.75UF,REC,REC,350M	
...3	6005-001006	SCREW-WOOD;FH,+,M3,L15.0,ZPC(BLK),SWRCH1	
...3	3001-000176	SPEAKER;30W,8ohm,93dB,65Hz	
...3	3001-000153	SPEAKER;20W,8ohm,93dB,1.3KHz	
...3	AA61-00357E	HOLDER-MIRROR;48J8,ABS,-,-,-,BLK,HB,L540	S.N.A
...3	AA61-00858B	BRACKET-FRAME;W3,SECC,T2.0	S.N.A
...3	AA61-00857B	BRACKET-NUT,INSERT;W3,M3 ZN	S.N.A
...3	AA61-00795C	RAIL-DOOR,L;W3,ABS HB,BLK	S.N.A
...3	AA61-00795B	RAIL-DOOR,R;W3,ABS HB,BLK	S.N.A
...3	AA61-00792C	HOLDER-SENSOR;W3,ABS HB,BLK	S.N.A
...3	AA61-00790C	HOLDER-MASK;W3,ABS HB,L610,BLK	S.N.A
...3	AA61-00507B	HOLDER-CABINET,WOOD;43,54,62J8,ABS,-,-,-	S.N.A
...3	AA61-00506B	HOLDER-CRT,MAIN;43,54,62J8,HIPS,-,-,-,BL	S.N.A
...3	AA61-00458B	CASTER;-,TP4020-05 PLY,-,OH56,-,-,SR44.4	S.N.A
..2	AA67-00202A	SCREEN-TINT;65W,1466*862,T=0.73,P=0.52	
..2	AA91-00755M	ASSY-C/FRONT,BOT;,HIPS V0,SS1028+DG703P,	
...3	AA64-02064K	CABINET-FRONT,BOT;55,65W3,HIPS V0,GRAY,S	S.N.A
...3	AA64-02080C	KNOB POWER;W3,ABS HB,BLK,BL903	
...3	AA64-02081B	KNOB-CH,VOL;W3,ABS HB,BLK,CHROME,GLOSSY	
...3	AA64-02082B	WINDOW-RMC,LED;W3,PC,CLEAR	
...3	AA64-02205C	BADGE-DECORATION;W3,NI+AL FORGING+NI,DG7	S.N.A
...3	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	
...3	AA61-00785B	GUIDE-KNOB,POWER;W3,ABS HB ,BLK,CHROME,G	S.N.A
...3	AA61-00786C	HOLDER-CONTROL;W3,ABS HB,BLK,BL903	
...3	AA61-00791B	HOLDER-FRONT,BOT;W3,ABS HB,L40,BLK,DO	S.N.A
...3	AA61-01068A	HOLDER-CABINET,BOT(B);W3,ABS HB,L40,BLK,	S.N.A
...3	AA61-60003J	SPRING-CS;-,SUS304,-,-,OD6,N7,OD6,-,-,-,	S.N.A
..2	AA61-00972D	HOLDER-SCREEN,R;65W3,ABS HB,BLK	S.N.A
..2	6001-000137	SCREW-MACHINE;BH,+,M3,L8,ZPC(YEL),SM20C,	S.N.A
..2	AA26-00101A	TRANS FBT;FWZ50A001E/FFA97513B,12KV,5P,-	
..2	AA60-00133A	SPACER-COVER,DUST;65W3,94HF-1,T2.0	S.N.A
..2	AA61-00357H	HOLDER-MIRROR;W3,ABS HB,L1060,BLK	S.N.A
..2	AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,-,-,-,-	S.N.A
..2	AA63-60131A	SPACER-FELT;SVP403J,FELT,-,-,-,BLK,T0.5,	S.N.A
..2	AA67-00125B	SCREEN-FRESNEL;65W,-,T2,1468*864,-,-,-,-	

ASSY LABEL

Loc. No.	Code No.	Description ; Specification	Remark
1 *	AA92-05190A	ASSY LABEL;HCM653WX/XAA,SEA,P54A,	S.N.A

ASSY COVER REAR

Loc. No.	Code No.	Description ; Specification	Remark
1 *	BP90-00002A	ASSY COVER REAR;65W3,HCM653WX/XAA	S.N.A
..2	AA64-01395G	INLAY-TERMINAL;J7,J8,PS SHEET,T0.5,-,-,B	S.N.A
..2	AA64-02074B	INLAY-SPEAKER;J7,J8,J9,PS SHEET,T0.5,-,-	S.N.A
..2	AA64-02596A	CABINET BACK-BOT;55W3,HIPS V0,BLK	
..2	AA64-60421C	INLAY-COVER;-,PS,T0.3,-,-,BLK,SEA	S.N.A

ASSY BOX

Loc. No.	Code No.	Description ; Specification	Remark
1 *	BP92-00003A	ASSY BOX;65W3,HCM653WX/XAA	S.N.A

ASSY P/MATERIAL

Loc. No.	Code No.	Description ; Specification	Remark
1 *	BP92-00002A	ASSY P/MATERIAL;65W3,HCM653WX/XAA	S.N.A
..2	AA61-20285A	HOLDER-BOX;3456,PP,-,-,-,WHT,VO	S.N.A

ASSY ACCESSORY

Loc. No.	Code No.	Description ; Specification	Remark
1 *	AA92-03258C	ASSY ACCESSORY;HCL473WX/XAA	S.N.A
..2	AA68-01509D	MANUAL USERS;HCM5525/553/653,ENG,W/P100G	
..2	AA39-00006A	CABLE-RCA;,3000MM	
..2	AA59-00176A	REMOCON;-,TM63,SHARK,51,L/GRAY,DO,-,-,-,	
...3	2802-000194	RESONATOR-CERAMIC;8MHz,1.0%,TP,8.5x4.5x5	
...3	AA09-00275A	IC MICOM;Z86L8808SSC-R51PX,SOP,ST,SZTM-8	
..2	AA61-20126A	HOLDER-LEG;-,ABS,-,-,-,BLK,HB	

7-2 HCM653WX/XAC

ASSY CHASSIS

Loc. No.		Code No.	Description ; Specification	Remark
1	*	AA91-04375A	ASSY CHASSIS;HCM653WX/XAC,P54A,	S.N.A
..2	PM+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	PP+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	PS+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2		AA95-01847E	ASSY SUB-PCB,SUB AMP;SVP-47W3HR,P54A,KOR	
...3	CNSW60	AA39-20020D	LEAD CONNECTOR-ASSY;,5P,67096-005,S,600,	
...3	CNSW60	AA39-20608A	LEAD CONNECTOR-ASSY;,3(2)P,SMP250-02,670	
...3	CS603	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
...3	ICS601	AA96-50367A	ASSY H/S;-,-,AA62-30181D,TDA7265,-	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4		1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1	
....4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4		AA62-30181D	HEAT SINK-ES;-,AL6063 EXTR.,2,WHT,70MM,-	S.N.A
...3		AA97-05521A	ASSY AUTO-SUB;SVP-47W3HR,P54A,KOREA	S.N.A
....4	CNS602	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
....4	CNS603	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4	CNS604	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
....4	CS602	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4	CS605	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
....4	CS606	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
....4	CS608	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4	CS611	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4	CS612	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4	CS614	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
....4	DS601	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	EL01	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EL02	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EL03	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	EL04	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4	LS601	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4	PCB	AA41-00459A	PCB-SUB AMP;SP43T6HF,FR-1,1L,A,1.6T,245X	S.N.A
....4	QS602	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	RS603	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RS605	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RS606	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	RS607	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	RS611	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4	RS612	2001-001050	R-CARBON(S);1.5KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	RS614	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RS616	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RS618	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4	RS619	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	RS621	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RS622	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RS623	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RS626	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3		3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2		AA95-01846D	ASSY SUB-PCB,SUB;PCL545R,P54A,AA95-00705	
...3	C432	2306-000267	C-FILM,MPPF;8.2nF,5%,1.6KV,TP,28.5x18.5x	
...3	C438	2306-000267	C-FILM,MPPF;8.2nF,5%,1.6KV,TP,28.5x18.5x	
...3	C491	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
...3	C876	2401-000787	C-AL;220uF,20%,160V,GP,TP,16x31.5mm	
...3	CN202	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
...3	CN801	AA39-00180A	LEAD CONNECTOR-ASSY;,14P,YBNH250-14,3515	
...3	CN802	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
...3	CN803	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
...3	CNW801	AA39-20061G	LEAD CONNECTOR-ASSY;,3P,YFH800-03,S,100M	
...3	CNZ02	AA39-00115A	LEAD CONNECTOR-ASSY;,10P,YBNH250-10,3515	
⚠ ...3	CR430S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
⚠ ...3	CR431S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
⚠ ...3	CR436S	2306-000235	C-FILM,MPPF;560nF,5%,400V,TP,26*22.5*14,	
⚠ ...3	CR471S	2301-001091	C-FILM,MPPF;470nF,5%,400V,TP,26x21.5x14.	
⚠ ...3	CR473S	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
⚠ ...3	CR474S	2306-000326	C-FILM,MPPF;4.7nF,5%,1.6KV,TP,28.5x16x9m	
⚠ ...3	CS803	2401-003370	C-AL;47uF,20%,450V,GP,BK,16X35.5,7.	
⚠ ...3	CY811S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
⚠ ...3	CY812S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
...3	D464	0402-000562	DIODE-RECTIFIER;UF5406,600V,3A,DO-201AD,	
⚠ ...3	D811S	0402-000102	DIODE-BRIDGE;D2SB60,600V,1.5A,-	
...3	IC301	AA96-50406A	ASSY H/S;-,-,AA62-30180K,LA7845,-	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4		1204-000517	IC-VERTICAL DEF.;LA7845,SIP,7P,-,PLASTIC	
....4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4		AA62-30180K	HEAT SINK-ES;-,A6063 EXTR,-,WHT,50/13,-,	S.N.A
⚠ ...3	IC421	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
⚠ ...3	IC430	1203-000162	IC-POSI.ADJUST REG.;317,TO-220,3P,-,PLAS	
⚠ ...3	IC431	1201-000191	IC-OP AMP;4558,DIP,8P,300MIL,DUAL,20V/mV	
⚠ ...3	IC471	1203-000610	IC-PWM CONTROLLER;494,DIP,16P,300MIL,PLA	
...3	ICS801	AA13-00024A	IC HYBRID;-,TNY253P,-,8PIN,-,-	
...3	ICS807	AA96-00111P	ASSY H/S;-,MAIN,AA62-30013L,KA278RA05,FA	S.N.A
....4		1203-001978	IC-VOLTAGE REGULATOR;KA278RA05,TO-220F,4	
....4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4		AA62-30013L	HEAT SINK-ES;-,-,-,-,44/22,-,WHT,-,-,-,-	S.N.A
...3	ICZ103	AA96-00891A	ASSY H/S;-,CONVERGENCE,AA62-30173L,STK39	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4		1201-001225	IC-VIDEO AMP;392,SIP,22P,-,TRIPLE,-,PLAS	
....4		6003-001021	SCREW-TAPTITE;RH,+,B,M3,L15,ZPC(YEL),SWR	S.N.A
....4		AA62-30173L	HEAT SINK;PJT,A6063,T2.0,H130,CG MODULE	S.N.A
...3	ICZ104	AA96-00891A	ASSY H/S;-,CONVERGENCE,AA62-30173L,STK39	S.N.A
...3	L432	AA27-00095A	COIL HORIZ. WIDTH;-,600uH,YL9N 15x27.5 C	
...3	L434	AA27-00221A	COIL HORIZ. WIDTH;600UH,600UH,SB5S OS6X2	
...3	L435	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3	L854	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3	L860	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3	L862	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3	L872	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3	L874	AA27-10002L	COIL CHOKE;-,24uH,K,-,2A,-,24UH-K,10x10m	
⚠ ...3	LC431S	AA27-30003M	COIL LINEARITY;-,5uH,OWA14x15,USRC0.1x60	
⚠ ...3	PC811S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
...3	Q353	0502-000442	TR-POWER;2SC4636RB,NPN,2W,TO-220,ST,10-	
...3	Q431	AA96-00033E	ASSY H/S;-,H-OUT,AA62-30173C,2SC5446, FM	S.N.A
....4		AA62-30173C	HEAT SINK-ES;-,-,T1.0,WHITE,SCREW-HOLE(2	S.N.A
....4		AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,-,SBHG	S.N.A
....4		AA02-00007A	SUB ETC-MICA;DPM-04,MICA,22x29x0.15mm	S.N.A
....4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4		0502-001175	TR-POWER;2SC5446,NPN,200000mW,TO-3PL,BK,	
....4		0402-001296	DIODE-RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
...3	Q433	AA96-50407A	ASSY H/S;-,-,AA62-30154G,KSD73Y,-	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4		0502-000298	TR-POWER;KSD73,NPN,30000mW,TO-220,TP,120	
....4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4		AA62-30154G	HEAT SINK-ES;-,A6063 EXTR,-,WHT,50/16,-,	S.N.A
...3	Q441	AA96-50383F	ASSY H/S;-,-,AA62-30180D,2SD921,-	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4		0502-001104	TR-POWER;2SD921,NPN,80W,TO-3P,BK,700-	
....4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4		AA62-30180D	HEAT SINK-ES;-,A6063 EXTR.,2,WHT,50mm,-,	S.N.A
...3	Q473	AA96-00037A	ASSY H/S;-,-,AA62-30181N,2SC4125, IRFS64	S.N.A
....4		AA62-30181N	HEAT SINK-ES;-,-,T1.0,WHITE,SCREW-HOLE(2	S.N.A
....4		AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,-,SBHG	S.N.A
....4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4		0505-001202	FET-SILICON;IRFS640A,N,200V,9.8A,0.18ohm	
....4		0502-001100	TR-POWER;2SC4125,NPN,70W,TO-3PML,BK,8-	
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
⚠ ...3	RL811S	3501-001053	RELAY-POWER;5Vdc,530mW,10A,1FormA,15mS,5	
⚠ ...3	RL812S	3501-001040	RELAY-POWER;12VDC,500mW,10A,1FormA,15mS,	
⚠ ...3	T431	AA26-50001U	TRANS-HORIZ.DRIVE;-,-,-,28mH,-,-,105uH,-	
⚠ ...3	T432	AA26-00012A	TRANS-DUMMY;-,-,-,-,-,-,-,-,-,-,-,-,-,EER4	
⚠ ...3	T433	AA26-00011A	TRANS-DUMMY;-,-,-,-,-,-,-,-,-,-,-,-,-,EE28	
⚠ ...3	T444S	AA26-00100A	TRANS FBT;FFA97513L,CT29A7DR,0.3mH,-,-,-	
⚠ ...3	T461	AA26-50001V	TRANS-HORIZ.DRIVE;-,-,-,6.0mH,-,-,113uH,	
⚠ ...3	T481	AA26-00091A	TRANS-HV-STORAGE;4mH,-,14P,830uH,180V,10	
⚠ ...3	TS811S	AA26-00055B	TRANS SWITCHING;,HLK436W,AC80V,AC80~280V	
...3		3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3		AA97-05175A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
....4	C301	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
....4	C302	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4	C303	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
....4	C304	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4	C305	2201-002022	C-CERAMIC,DISC;0.005nF,0.25pF,500V,NP0,T	
....4	C307	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
....4	C308	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C309	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
....4 C311	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C351	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
....4 C352	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
....4 C353	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C354	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
....4 C355	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
....4 C405	2201-000558	C-CERAMIC,DISC;0.47nF,10%,50V,Y5P,TP,5x3	
....4 C406	2201-000370	C-CERAMIC,DISC;0.22nF,10%,50V,Y5P,TP,4x3	
....4 C412	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C413	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C417	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
....4 C418	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C419	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
....4 C426	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C427	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
....4 C428	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C429	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
....4 C437	2401-003114	C-AL;4.7uF,20%,250V,WT,TP,10x16,5	
....4 C445	2401-001622	C-AL;6.8uF,20%,50V,BP,TP,16x25mm,7.	
....4 C449	2201-000406	C-CERAMIC,DISC;0.27nF,10%,2kV,Y5P,TP,6.3	
....4 C450	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
....4 C451	2401-001160	C-AL;33uF,20%,160V,GP,-,16x35mm,7.5	
....4 C452	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
....4 C453	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
....4 C454	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
....4 C455	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
....4 C456	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
....4 C457	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
....4 C458	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
....4 C459	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
....4 C460	2303-000331	C-FILM,PPF;4.7nF,5%,630V,TP,19.5x12x7,7.	
....4 C467	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C468	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C469	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
....4 C472	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
....4 C476	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
....4 C477	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
....4 C478	2301-000020	C-FILM,PEF;27nF,5%,100V,TP,7.3x4x12.5mm,	
....4 C479	2301-000200	C-FILM,PEF;2.2nF,5%,200V,TP,11.0x6.0x9.0	
....4 C480	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C481	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
....4 C483	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
....4 C484	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
....4 C487	2305-000178	C-FILM,MPEF;10nF,5%,100V,TP,-,5mm	
....4 C488	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 C489	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C490	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C492	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
....4 C857	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
....4 C866	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 C869	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 C873	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
....4 CN401	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
....4 CN403	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
⚠ 4 CR401S	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
⚠ 4 CR402S	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,	
⚠ 4 CR403S	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,	
....4 CS804	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 CS805	2401-001101	C-AL;330uF,20%,16V,GP,TP,8x11.5,5	
....4 CS807	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 CS808	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 CS809	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
....4 CS812	2201-002076	C-CERAMIC,DISC;0.068nF,5%,1kV,SL,TP,8x4m	
....4 CS813	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
....4 CS814	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
....4 CZ101	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
....4 CZ102	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
....4 CZ108	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
....4 CZ109	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
....4 CZ110	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
....4 CZ111	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
....4 CZ112	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
....4 CZ113	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
....4 CZ114	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
....4 CZ115	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
....4 CZ116	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
....4 CZ117	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
....4 CZ118	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
....4 CZ126	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
....4 CZ127	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
....4 CZ128	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
....4 CZ132	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
....4 CZ133	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
....4 CZ134	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
....4 CZ135	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
....4 CZ136	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
....4 CZ137	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
....4 CZ138	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
....4 CZ139	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
....4 CZ140	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 CZ141	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 CZ151	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
....4 CZ152	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
....4 CZ153	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
....4 CZ154	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
....4 CZ155	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
....4 CZ156	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
....4 D302	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D353	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D384	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 D385	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D433	0402-000537	DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
....4 D434	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D435	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 D436	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D440	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4 D441	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4 D442	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D443	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D444	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D445	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4 D451	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4 D453	0402-001286	DIODE-RECTIFIER;RP1H,2000V,.1A,-,TP	
....4 D472	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D474	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D477	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D478	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D479	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D480	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 D484	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 D501	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 4 DR401S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4 DR402S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4 DR404S	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
....4 DS805	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
....4 DS807	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DS809	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
....4 DZ301	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
....4 DZ304	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
....4 DZ305	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
....4 DZ306	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500mW,D	
....4 DZ307	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
....4 DZ386	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO	
....4 DZ395	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
....4 DZ400	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
....4 DZ413	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
....4 DZ473	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
....4 DZ474	0403-000734	DIODE-ZENER;TZP15B,15V,14.7-16.5V,1W,DO-	
....4 DZ481	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
⚠ 4 DZ482S	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
....4 DZ483	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
....4 DZ801	0406-001106	DIODE-TVS;P6KE300A,285/-/315V,600W,DO-20	
....4 DZ802	0406-001106	DIODE-TVS;P6KE300A,285/-/315V,600W,DO-20	
....4 DZ803	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ804	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m	
....4 DZ805	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
....4 EL01	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EY101	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY102	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY103	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY104	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY105	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY107	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 EY108	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY109	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY110	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY111	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY112	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY113	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY114	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY115	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY116	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY117	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY118	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY120	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY121	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY122	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY123	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY124	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY125	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY126	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY127	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY128	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY129	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY130	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY131	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY132	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY133	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY134	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY136	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY137	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY138	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY139	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY140	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY141	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY142	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY143	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY144	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY145	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY146	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY147	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY148	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY149	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY150	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY151	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY152	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY153	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY154	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY155	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY156	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY157	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY158	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY159	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY160	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY161	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY162	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY163	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY164	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY165	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY166	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY167	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY168	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY171	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY172	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY173	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY174	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY175	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY176	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY177	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY178	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY179	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY180	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY181	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY182	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY183	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY184	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY185	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY186	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY187	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY188	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY189	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY190	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY191	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY192	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY193	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY194	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY195	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY196	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY197	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY198	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY199	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY200	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY201	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY202	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY203	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY204	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY205	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY206	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY207	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY208	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY209	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY210	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY211	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY212	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY213	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY214	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY215	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY216	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY217	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY218	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY219	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY220	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY221	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY222	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY223	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY224	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY225	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY226	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY227	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY228	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY229	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY230	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY231	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY232	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY233	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EYS01	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EYS02	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EYS03	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EYS04	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EYS05	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EYS06	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EYS07	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EYS08	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EYS09	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
⚠ 4 FD101S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
⚠ 4 FD102S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
....4 GT01	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT02	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT03	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT04	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT05	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT06	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT07	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT08	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT09	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT10	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT11	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT12	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT16	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT17	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT18	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT19	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT21	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT22	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT23	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT24	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT25	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 GT26	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT27	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT28	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT29	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT30	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT31	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT32	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT33	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT34	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT35	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT37	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT403	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT404	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT405	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT812A	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT813A	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT814A	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
⚠ 4 ICR01S	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
....4 L341	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
....4 L480	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L481	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L482	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
....4 L483	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
....4 L493	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L494	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
....4 L495	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L499	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 LS801	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 LS802	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 LZ107	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ108	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ109	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ110	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ111	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ112	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 PCB	AA41-00340C	PCB-SUB;PCL545R,CEM-1,1L,C,1.6T,330X245,	S.N.A
....4 Q301	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q350	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q351	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q352	0501-000366	TR-SMALL SIGNAL;KSC2330-Y,NPN,1W,TO-92L,	
....4 Q381	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q382	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q401	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q402	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q421	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q422	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
....4 Q432	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q435	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
....4 Q436	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q451	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q461	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q471	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q472	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
....4 Q474	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q481	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q482	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
⚠ 4 QR401S	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 QS801	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
....4 R301	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
....4 R302	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
....4 R303	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R305	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R306	2003-002129	R-METAL OXIDE(S);3.9ohm,5%,2W,AF,TP,3.9x	
....4 R307	2003-002129	R-METAL OXIDE(S);3.9ohm,5%,2W,AF,TP,3.9x	
....4 R308	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
....4 R310	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
....4 R312	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R313	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R314	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R332	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 R333	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 R334	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 R350	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R351	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R352	2001-000837	R-CARBON;51KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R353	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R354	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R355	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R356	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R357	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R358	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R359	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R360	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R361	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R362	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R363	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R364	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R365	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R366	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R384	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R385	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R386	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R387	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R388	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R389	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R397	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R405	2009-001109	R-TEMPERATURE;240ohm,5%,1/4W,AA,TP,2.3x6	
....4 R406	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R407	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
....4 R408	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R409	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R410	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R411	2008-001113	R-FUSIBLE(S);0.22ohm,10%,2W,AG,TP,3.9x12	
....4 R412	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R413	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R414	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R415	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R416	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R417	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R418	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R419	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R420	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R421	2003-002159	R-METAL OXIDE;150OHM,5%,1W,AG,TP,4.3X12M	
....4 R422	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R423	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R424	2008-001022	R-FUSIBLE(S);10ohm,5%,1W,AF,TP,2.5x6.5mm	
....4 R425	2003-000417	R-METAL OXIDE(S);1.2Kohm,5%,3W,AA,TP,6x1	
....4 R426	2003-002153	R-METAL OXIDE;4.7OHM,5%,2W,AG,TP,6X16MM	
....4 R427	2003-002279	R-METAL OXIDE(S);1.2OHM,5%,2W,AG,TP,5.6X	
....4 R427A	2003-002279	R-METAL OXIDE(S);1.2OHM,5%,2W,AG,TP,5.6X	
....4 R428	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R428A	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R429	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R430	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R432	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R433	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R434	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R435	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 R436	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R437	2008-001087	R-FUSIBLE(S);1.8ohm,5%,2W,AG,TP,3.9x12mm	
....4 R438	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R439	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R440	2008-000282	R-FUSIBLE;0.47ohm,5%,1W,AA,TP,3.9x12mm	
....4 R441	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R442	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R442A	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R443	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
....4 R443A	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
....4 R444	2003-000995	R-METAL OXIDE(S);3.3Kohm,5%,2W,AF,TP,3.9	
....4 R445	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R446	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R447	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R448	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R449	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R454	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R455	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R456	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R458	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R459	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R460	2003-002044	R-METAL OXIDE(S);100ohm,5%,1W,AF,TP,2.5x	
....4 R461	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R462	2008-001145	R-FUSIBLE;4.7OHM,5%,1/2W,AF,TP,2.5X6.5MM	
....4 R463	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
....4 R464	2003-002158	R-METAL OXIDE;0.68OHM,5%,1W,AG,TP,4.3X12	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R465	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R466	2004-001386	R-METAL(S);16.9Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R467	2004-001986	R-METAL(S);35.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R468	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R469	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R470	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R471	2004-002011	R-METAL(S);110Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R472	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
....4 R473	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R474	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R475	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R482	2001-001031	R-CARBON;91KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R483	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R484	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R485	2008-001137	R-FUSIBLE(S);3.3ohm,5%,1W,AF,TP,3.9x10mm	
....4 R486	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
....4 R487	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R488	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R489	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R490	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R491	2001-000745	R-CARBON;4.7OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R492	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R494	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R495	2001-000262	R-CARBON;1.8MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R501	2004-001376	R-METAL(S);11Kohm,1%,1/2W,AA,TP,2.4x6.4m	
....4 R502	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R856	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R857	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RFS802	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP,3.9x10mm	
....4 RFZ19	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ20	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ21	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ22	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ50	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ51	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ52	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ53	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
⚠ 4 RR401S	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 4 RR402S	2103-001086	VR-SEMI;100KOHM,25%,0.3W,TOP	
⚠ 4 RR403S	2004-004001	R-METAL(S);180Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 4 RR404S	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 4 RR405S	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 4 RR406S	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 4 RR407S	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
⚠ 4 RR408S	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
⚠ 4 RR409S	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
⚠ 4 RR410S	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
⚠ 4 RR471S	2103-001024	VR-SEMI;50Kohm,25%,0.3W,TOP	
....4 RS801	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS803	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS804	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS805	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 RS806	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS807	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS808	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS809	2001-001099	R-CARBON(S);2.7KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RZ104	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ105	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ106	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ107	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ108	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ109	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ110	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ111	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ112	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ113	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ114	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ115	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ116	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ117	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ118	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ123	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ124	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ125	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ126	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ127	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ128	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ129	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ129A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ130	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ130A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ131	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ131A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ132	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ132A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ133	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ134	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ135	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ136	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ137	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ138	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ139	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ140	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ141	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ142	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ143	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ144	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ145	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ146	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ147	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ148	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ148A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ149	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ149A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
⚠ 4 VP811S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
..2	AA95-01841A	ASSY SUB-PCB,SENSOR;PCL545R,P54A,AA95-01	
...3 CN01	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
...3 D01	0603-001067	PHOTO DIODE;-,10V,560nm,BK	
...3	AA97-05352A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
....4 PCB	AA41-00433B	PCB-SENSOR;PCL545R,CEM-1,1L,A,1.6T,245X2	S.N.A
....4 Q01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 R01	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R02	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R03	2001-000454	R-CARBON;2.2MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
..2	AA95-01797U	ASSY SUB-PCB,CONTROL;SVP-47W3HR,P54A,AA9	
...3 CNW01	AA39-00223A	LEAD CONNECTOR-ASSY;,11P,67096-011,35155	
...3 CNY01	3711-003353	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,ANGLE,	
...3 CNY02	3711-000447	CONNECTOR-HEADER;3WALL,3P,1R,2.5mm,ANGLE	
...3 CNYW02	AA39-00259A	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,3P	
...3 LEDY01	0601-001381	LED;ROUND,RED/GRN,5.0MM,650/563NM	
...3 RMY01	AA32-00012A	MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES	
...3 SWY01	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY02	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY03	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY04	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY05	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY06	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY07	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY08	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	AA97-05321A	ASSY AUTO-SUB;SVP-47W3HR,P54A	S.N.A
....4 CY01	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 DZY02	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4 DZY03	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4 PCB	AA41-00518A	PCB-CONTROL;SVP-47W3HR,FR-1,1L,A,1.6T,24	S.N.A
....4 QY01	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
....4 RY02	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RY03	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY04	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY05	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY06	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY07	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 RY08	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RY09	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2	AA95-01849A	ASSY SUB-PCB,TERMINAL;HCL552W,P54A,AA95-	
...3 CNT01	3711-003630	CONNECTOR-HEADER;BOX,32P,2R,2.54mm,ANGLE	
...3 CNT02	3711-003630	CONNECTOR-HEADER;BOX,32P,2R,2.54mm,ANGLE	
...3 CNY01	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
...3 CNY02	AA39-20052D	LEAD CONNECTOR-ASSY;,4P,YBNH025-04,YSH02	
...3 IC703	0904-001121	IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,30	
...3 IC705	0801-000213	IC-CMOS LOGIC;4052,MULTIPLEXER,DIP,16P,3	

Loc. No.	Code No.	Description ; Specification	Remark
...3 ICD01	1204-001510	IC-SEPARATOR;EL4583CN,DIP,16P,-,PLASTIC,	
...3 ICD02	0801-000284	IC-CMOS LOGIC;4528,MULTIVIBRATOR,DIP,16P	
...3 ICD03	1204-001510	IC-SEPARATOR;EL4583CN,DIP,16P,-,PLASTIC,	
...3 JKV02	3722-001039	JACK-PIN;9P,3.4mm,SN,BLK,#16-22	
...3 JKV03	3722-001382	JACK-PIN;5P(9P),3.4MM,NI,R/W/G/BLUE,-	
...3 JKV04	3722-001626	JACK-PIN;8P/9P,3.4MM,NI,BLK,-	
...3 JKV08	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
...3 RD18	2001-000954	R-CARBON;750KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	AA97-05194A	ASSY AUTO-SUB;HCL552W,P54A	S.N.A
....4 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 C716	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 C730	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
....4 C731	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
....4 C738	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 C740	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 C760	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C761	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C762	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C763	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C764	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C765	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C766	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C767	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C780	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 CD01	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
....4 CD03	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
....4 CD06	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
....4 CD11	2401-000404	C-AL;10uF,20%,16V,BP,TP,5x11,5	
....4 CD12	2401-000404	C-AL;10uF,20%,16V,BP,TP,5x11,5	
....4 CD16	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
....4 CD17	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
....4 L701	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L702	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L711	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L720	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L721	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L722	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L723	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L724	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L725	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L726	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 LD01	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 LD02	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 LD04	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 RN701	2011-000160	R-NETWORK;10Kohm,5%,1/8W,A,SIP,9P,TP	
....4	AA97-06154A	ASSY SMD-SUB;HCL552W,P54A	S.N.A
.....5 C702	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C704	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
.....5 C705	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
.....5 C706	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C707	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C708	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C709	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C710	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C711	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C712	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C713	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C714	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C715	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C717	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C718	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C719	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C720	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C721	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C722	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C723	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C724	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C727	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C732	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C733	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C734	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C735	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C736	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C737	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C739	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C741	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C768	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C769	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 CD02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD05	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
.....5 CD07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD09	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 CD10	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 CD13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD15	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD18	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
.....5 IC701	1001-001030	IC-VIDEO SWITCH;TDA6920X,-,SOP,28P,300MI	
.....5 IC702	1001-001030	IC-VIDEO SWITCH;TDA6920X,-,SOP,28P,300MI	
.....5 PCB	AA41-00343A	PCB-TERMINAL;PCL545R,FR-4,2L,A,1.6T,180X	S.N.A
.....5 Q701	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q702	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q703	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q704	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q705	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q706	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q707	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q711	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q712	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q714	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 QD01	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 QD02	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 QD03	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 QD04	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 R701	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R702	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R703	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R704	2007-001157	R-CHIP;750ohm,5%,1/16W,DA,TP,1608	
.....5 R705	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R706	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R707	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R708	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R709	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R710	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R712	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R713	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R714	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R715	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R716	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R717	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R718	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R719	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R720	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R721	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R722	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R723	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R724	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R725	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R726	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R727	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R728	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R729	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R734	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.....5 R735	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.....5 R740	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R741	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R742	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R743	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R744	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R745	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R748	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R749	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R750	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R751	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R752	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R753	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
.....5 R754	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
.....5 R755	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R756	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R757	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R758	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R759	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	

Loc. No.		Code No.	Description ; Specification	Remark
.....5	R760	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5	R761	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
.....5	R762	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5	R763	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5	R764	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
.....5	R765	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5	R766	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5	R767	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5	R768	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5	R769	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5	R774	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5	R775	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5	R776	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5	R777	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5	R779	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5	R780	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5	R788	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5	R791	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5	R792	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5	R793	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5	R794	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5	R795	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5	R796	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5	R797	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5	R820	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5	R821	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5	R829	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5	R830	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5	RD01	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5	RD02	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5	RD03	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
.....5	RD04	2007-000096	R-CHIP;30Kohm,5%,1/16W,DA,TP,1608	
.....5	RD05	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5	RD06	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5	RD07	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
.....5	RD08	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5	RD09	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
.....5	RD11	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
.....5	RD12	2007-000913	R-CHIP;43Kohm,5%,1/16W,DA,TP,1608	
.....5	RD13	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5	RD14	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
.....5	RD15	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
.....5	RD16	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5	RD17	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5	RD19	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5	RD20	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5	RD21	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5	RP784	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5	RY701	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5	RY702	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5	RY703	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3		0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
..2		AA95-01853A	ASSY SUB-PCB,V/M;PCL545R,P54A,AA95-00714	
...3	CNZ101	AA39-20055E	LEAD CONNECTOR-ASSY;,6P,YBNH025-06,67096	
...3	QZ101	AA96-50162F	ASSY H/S;-,POWER,AA62-30013E,2SA1011,30M	S.N.A
....4		0502-000131	TR-POWER;2SA1011-D,PNP,1.2W,TO-220,-,60	
....4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4		AA62-30013E	HEAT SINK-ES;-,A6063 EXTR,-,-,30(21) T02	S.N.A
...3	QZ102	AA96-50162G	ASSY H/S;-,AMP,AA62-30013E,2SC2344,30MM	S.N.A
....4		0502-000153	TR-POWER;2SC2344-D,NPN,1.2W,TO-220,-,60	
....4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4		AA62-30013E	HEAT SINK-ES;-,A6063 EXTR,-,-,30(21) T02	S.N.A
...3	RZ120	2008-001097	R-FUSIBLE(S);33OHM,5%,1/2W,AC,BK,2.5X6.5	
...3		AA33-00011A	MAGNET CONVERGENCE;JH92LTU-36C,29.1MM,0.	
...3		AA97-05191A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
....4	CNZ102	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4	CNZ103	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4	CNZ104	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4	CZ101	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4	CZ102	2401-001157	C-AL;33uF,20%,160V,GP,TP,12.5x20,5	
....4	CZ103	2201-000516	C-CERAMIC,DISC;4.7nF,+100-0%,500V,Y5U,TP	
....4	CZ104	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
....4	CZ105	2201-000516	C-CERAMIC,DISC;4.7nF,+100-0%,500V,Y5U,TP	
....4	CZ106	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
....4	CZ107	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
....4	CZ108	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
....4	CZ109	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
....4	CZ110	2201-000604	C-CERAMIC,DISC;0.056nF,+100-0%,500V,SL,T	
....4	CZ111	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4	CZ112	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
....4	DZ101	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	DZ102	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	DZ103	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	DZ104	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	DZ105	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	DZ106	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	LZ101	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
....4	PCB	AA41-00344A	PCB-VM;PCL545R,FR-1,1L,A,1.6T,245X245,P5	S.N.A
....4	QZ103	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	QZ104	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	QZ105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	QZ106	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	RFZ101	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
....4	RZ101	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RZ102	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RZ103	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4	RZ104	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RZ105	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RZ106	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RZ107	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RZ108	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RZ109	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RZ110	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RZ111	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4	RZ112	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4	RZ113	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4	RZ114	2003-000532	R-METAL OXIDE(S);18ohm,5%,2W,AF,TP,4x12m	
....4	RZ115	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RZ116	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RZ117	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RZ118	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RZ119	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RZ121	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RZ122	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4	RZ123	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3		3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3		6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
⚠ ..2		AA96-00156E	ASSY POWER CORD;-,EP2/YES(US),H/S 150MM,	S.N.A
..2		AA94-11166D	ASSY PCB MISC-CRT;PCL545R,P54A	
...3	CN501	3711-003051	CONNECTOR-HEADER;BOX,8P,1R,2.5MM,STRAIGH	
...3	CN502	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3	CN502B	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3	CN503	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3	CN503B	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3	CNW401	AA39-20027B	LEAD CONNECTOR-ASSY;,6P,67096-006,S,400,	
...3	CNW501	AA39-00127C	LEAD CONNECTOR-ASSY;,8P,35155-0800,S,500	
...3	CNW502	AA39-00112A	LEAD CONNECTOR-ASSY;,10P,35155-1000,S,30	
...3	CNW503	AA39-00112A	LEAD CONNECTOR-ASSY;,10P,35155-1000,S,30	
...3	FOCUS-	AA39-20115A	LEAD CONNECTOR-ASSY;,1P,BUSHING,500,3239	
...3	FOCUS-	AA39-20115D	LEAD CONNECTOR-ASSY;P54A/SVP-55W3HD,UL32	
...3	FOCUS-	AA39-20115D	LEAD CONNECTOR-ASSY;P54A/SVP-55W3HD,UL32	
...3	GBW-GN	AA39-00047E	LEAD CONNECTOR-ASSY;,1P,JUMPER,BLK,300MM	
...3	GBW-SC	AA39-00049A	LEAD CONNECTOR-ASSY;,1P,JUMPER,RED,300MM	
...3	GNDWIR	AA39-00198C	LEAD CONNECTOR-ASSY;P54A/SVP-55W3HD,UL16	
...3	GRW-GN	AA39-00047E	LEAD CONNECTOR-ASSY;,1P,JUMPER,BLK,300MM	
...3	GRW-SC	AA39-00049A	LEAD CONNECTOR-ASSY;,1P,JUMPER,RED,300MM	
...3	IC501	AA96-50151B	ASSY H/S;-,AMP,AA61-10060A,TDA6111Q,-	S.N.A
....4		1201-001131	IC-VIDEO AMP;6111,SIP,9P,-,SINGLE,-,PLAS	
....4		6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH1	S.N.A
....4		6021-000222	NUT-HEXAGON;2C,M3,ZPC(YEL),SM20C 1	S.N.A
....4		AA61-10060A	BRACKET-TR;W3220,CUS-1 1/2H,T0.5,-,-,-,-	S.N.A
...3	IC531	AA96-50151B	ASSY H/S;-,AMP,AA61-10060A,TDA6111Q,-	S.N.A
...3	IC561	AA96-50151B	ASSY H/S;-,AMP,AA61-10060A,TDA6111Q,-	S.N.A
...3	SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3	SG532	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3	SG562	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3	V501	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3	V531	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3	V561	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3	VR501	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3	VR531	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3	VR561	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	

Loc. No.	Code No.	Description ; Specification	Remark
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	AA97-05330A	ASSY AUTO-SUB;PCL545R,P54A,U.S.A,54	S.N.A
....4 C502	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C503	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C504	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
....4 C505	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C506	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C507	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C510	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C511	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
....4 C512	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
....4 C513	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
....4 C514	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
....4 C532	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C533	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C534	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
....4 C535	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C536	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C537	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C540	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C541	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
....4 C542	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
....4 C543	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
....4 C562	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C563	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C564	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
....4 C565	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C566	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C567	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C570	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C571	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
....4 C572	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
....4 C573	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
....4 CN401	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
....4 D501	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D502	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D503	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 D504	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D509	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D510	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D531	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D532	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D533	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 D561	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D562	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D563	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 DZ501	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ502	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ503	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 DZ531	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ532	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ533	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 DZ561	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ562	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ563	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 EL503	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL504	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL505	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL533	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL534	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL535	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL563	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL564	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL565	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 GT501	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT502	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT503	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT504	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT531	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT532	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT533	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT534	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT561	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT562	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT563	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT564	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT565	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT566	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 L501	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L531	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L561	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 PCB	AA41-00406B	PCB-CRT;PCL545R,FR-1,1L,B,1.6T,245X245,P	S.N.A
....4 Q501	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 Q502	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q504	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q531	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 Q533	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q561	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 Q563	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 R500	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R502	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R503	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R504	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R505	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R506	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R507	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R508	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R509	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R510	2001-001000	R-CARBON;82KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R511	2001-000313	R-CARBON;11KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R513	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 R514	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R516	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R517	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R518	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R519	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R520	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R521	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R522	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R523	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R524	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R526	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R527	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R528	2001-001015	R-CARBON;9.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R529	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R532	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R533	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R536	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R537	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R538	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R540	2001-000837	R-CARBON;51KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R541	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R543	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 R544	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R545	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R546	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R547	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R548	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R549	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R550	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R551	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R552	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R553	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R554	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R555	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R556	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R557	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R559	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 R562	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R563	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R564	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R566	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R567	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R568	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R569	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R570	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R571	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R572	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R573	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 R574	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R575	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R576	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R577	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R578	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R579	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R580	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R581	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R582	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R583	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R584	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R589	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 SG351	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG501	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG503	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG533	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG561	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG563	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
..2	AA94-11145A	ASSY PCB MISC-A/V FRONT;HCM653WX/XAC,P54	
...3 CNY01A	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
...3 CNY702	3711-000447	CONNECTOR-HEADER;3WALL,3P,1R,2.5mm,ANGLE	
...3 CNYW01	AA39-00257A	LEAD CONNECTOR-ASSY;,12P,67096-012,S,120	
...3 CNYW02	AA39-00260B	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,3P	
...3 JK101	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
...3 JK102	3722-001164	JACK-PIN;3P,3.4mm,SN,WH:YE:RE,#16-22	
...3 SW101	3404-000208	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
...3	AA97-07148A	ASSY AUTO-A/V FRONT;HCL473WX/XAC,P54A,AA	S.N.A
....4 PCB	AA41-00499A	PCB-FRONT A/V;SVP-54T6SR,FR-1,1L,A,1.6T,	S.N.A
....4 RK101	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	AA91-00762D	ASSY-JACK,SIDE;,P54A PAL XAA,W3	
....4	AA61-00793C	HOLDER-JACK;W3,ABS HB,BLK,DG703P	
....4	AA64-02085D	DOOR-AV;W3,ABS HB,BLK,DG703P	
....4	AA64-02086E	INLAY-AV;W3,PS SHEET,T0.5,P55A	S.N.A
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2	AA61-00504B	HOLDER-CHASSIS;43,54,62J8,ABS,-,-,-,GRAY	S.N.A
..2	AA91-00766A	ASSY-CENTER,SPK;,W3	
...3 PCS+SP	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3	AA61-00859A	PLATE-CENTER,SPK;W3,WOOD	S.N.A
...3	AA96-10153A	ASSY SPEAKER;-,8ohm,15w,001052,20609A,CE	S.N.A
....4 C-SPK	3001-000151	SPEAKER;20W,8ohm,92dB,130Hz	
....4	AA39-20609A	LEAD CONNECTOR-ASSY;,2P,SMH250-02,REC,40	
..2	AA94-07576A	ASSY PCB POWER;PCL545R,P54A,53	
...3 C812	2401-000701	C-AL;2200uF,20%,250V,GP,-,35x70mm,1	
...3 C813	2401-000701	C-AL;2200uF,20%,250V,GP,-,35x70mm,1	
...3 C831	2306-000323	C-FILM,MPPF;2.2nF,5%,1.6KV,TP,28.5x15.5x	
...3 C862	2401-003076	C-AL;3300uF,20%,50V,WP,BK,18x35.5mm	
...3 C865	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
...3 C868	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
...3 C875	2401-002251	C-AL;470uF,20%,200V,GP,BK,25x40mm,1	
...3 CN802	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
...3 CN803	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
⚠ ...3 CX801S	2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
⚠ ...3 CX802S	2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
⚠ ...3 CY801S	2201-000987	C-CERAMIC,DISC;2.2nF,20%,400V,Y5U,TP,12.	
⚠ ...3 CY802S	2201-000987	C-CERAMIC,DISC;2.2nF,20%,400V,Y5U,TP,12.	
⚠ ...3 D801S	AA96-50310A	ASSY H/S;-,POWER,AA62-30150C,RBV606,-	S.N.A
....4	AA62-30150C	HEAT SINK-ES;-,A6063 EXTR,-,WHT,40(24.5)	S.N.A
....4	AA60-30003A	WASHER;-,-,-,T1.5,-,SBHG-1,-	S.N.A
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	0402-000549	DIODE-BRIDGE;RBV606,600V,6A,-,BK	
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
⚠ ...3 D810	0402-000250	DIODE-RECTIFIER;RG4C,1000V,1A,-	
⚠ ...3 D854	AA96-50153C	ASSY H/S;-,-,AA62-30013D,FLM-G12S,-	S.N.A
....4	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30013D	HEAT SINK-ES;-,A6063 EXTR,-,-,55(21) T02	S.N.A
⚠ ...3 D855	AA96-50153C	ASSY H/S;-,-,AA62-30013D,FLM-G12S,-	S.N.A
⚠ ...3 D856	AA96-50153C	ASSY H/S;-,-,AA62-30013D,FLM-G12S,-	S.N.A
⚠ ...3 D857	AA96-50153C	ASSY H/S;-,-,AA62-30013D,FLM-G12S,-	S.N.A
⚠ ...3 D858	AA96-50153C	ASSY H/S;-,-,AA62-30013D,FLM-G12S,-	S.N.A
⚠ ...3 D859	AA96-50153A	ASSY H/S;-,TR,AA62-30013D,FMG-G26S,-	S.N.A
....4	0402-000231	DIODE-RECTIFIER;FMG-G26S,600V,4A,TO-220F	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30013D	HEAT SINK-ES;-,A6063 EXTR,-,-,55(21) T02	S.N.A
⚠ ...3 FD802S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ ...3 FD804S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ ...3 FD855S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ ...3 FP801S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	

Loc. No.	Code No.	Description ; Specification	Remark
⚠ ...3 IC801S	AA96-00035A	ASSY H/S;-,POWER,AA62-30181P,STR-F6656,-	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA13-00018A	IC HYBRID;-,STR-F6656,LF1351,5PIN,-,-	
....4	AA62-30181P	HEAT SINK-ES;-,-,T1.0,WHITE,SCREW-HOLE(2	S.N.A
⚠ ...3 IC804	1203-001400	IC-POWER PRESCALER;SE110N,T0-220(SIP),3P	
⚠ ...3 LX801S	AA29-30002L	FILTER LINE NOISE;-,10mHMIN,5A,AC90~260V	
⚠ ...3 LX802S	AA29-30002M	FILTER LINE NOISE;-,1mHMIN,5A,AC90~260V,	
⚠ ...3 LX803S	AA29-30002M	FILTER LINE NOISE;-,1mHMIN,5A,AC90~260V,	
⚠ ...3 NT801S	1404-001195	THERMISTOR-NTC;5.1ohm,15%,2900,27mW/C,BK	
⚠ ...3 PC801S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
...3 R817	2009-001096	R-METAL PLATE;0.07ohm,5%,5W,CL,BK,5x14x1	
...3 R841	2008-001093	R-FUSIBLE(S);22OHM,5%,1/2W,AC,BK,2.5X6.5	
⚠ ...3 T801S	AA26-00099A	TRANS SWITCHING;EER5345,PCL544R,AC220V,1	
...3	AA97-05241A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
....4 C809	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4 C814	2201-002041	C-CERAMIC,DISC;0.82nF,10%,2kV,Y5P,TP,9x5	
....4 C815	2201-000406	C-CERAMIC,DISC;0.27nF,10%,2kV,Y5P,TP,6.3	
....4 C816	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
....4 C817	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
....4 C818	2301-001216	C-FILM,PPF;47nF,5%,630V,TP,20x14.5x22,7.	
....4 C819	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
....4 C833	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
....4 C834	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
....4 C851	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4 C852	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
....4 C853	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
....4 C854	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4 C855	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
....4 C861	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4 C864	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4 C871	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4 C872	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
....4 C874	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
....4 C877	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
⚠ 4 D834	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
⚠ 4 D843	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
⚠ 4 D851	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
⚠ 4 D853	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 DZ858	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
....4 EL01	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL02	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL03	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL04	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL05	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL06	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL09	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL10	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL15	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL18	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL22	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EL25	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
....4 EY01	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY05	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY06	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY100	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY101	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY104	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY107	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY108	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY109	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY110	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY111	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY112	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY113	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY114	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY115	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY116	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY138	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY139	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY140	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY141	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY142	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY143	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY158	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY159	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY163	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 EY164	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY165	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY166	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY167	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY168	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY170	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY171	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY172	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY173	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY174	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY175	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY176	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY177	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY178	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY179	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY180	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY181	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY182	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY183	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY184	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY185	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY186	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY187	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY188	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY189	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY190	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY191	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY192	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY193	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY71	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY72	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY79	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY80	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY81	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY82	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY83	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY84	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY85	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY86	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY87	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY88	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY89	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY90	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY91	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY92	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY93	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY94	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY95	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 EY99	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
....4 F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F802A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F802B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F804A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F804B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F855A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F855B	3602-000114	FUSE-HOLDER;-,-,30mohm	
⚠ 4 FD805S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 4 FD806S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
⚠ 4 FD854S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 4 FD871S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
....4 GT801	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT802	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT810	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT811	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT812	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT813	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 GT814	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
....4 L806	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L807	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L808	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L810	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L811	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L812	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L813	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L814	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L815	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L816	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L831	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L832	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 L851	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L857	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L859	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 PCB	AA41-00342A	PCB-POWER;PCL545R,CEM-1,1L,A,1.6T,330X24	S.N.A
....4 Q801	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 R808	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R808A	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R812	2003-002170	R-METAL OXIDE(S);15Kohm,5%,2W,AG,TP,3.9x	
....4 R814	2003-002170	R-METAL OXIDE(S);15Kohm,5%,2W,AG,TP,3.9x	
....4 R815	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
....4 R815A	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
....4 R832	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R834	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R837	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R838	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R855	2001-001196	R-CARBON(S);9.1KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R871	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R872	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R873	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R874	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R875	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 4 RP801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 4 RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 4 RY801S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 4 VP801S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
⚠ 4 VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
...3	AA39-20009B	LEAD CONNECTOR-ASSY;,1P,YFH800-01,300,16	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
..2	AA94-07625H	ASSY PCB MAIN;HCL473WX/XAA,P54A,U.S.A	
...3 C664	2401-001068	C-AL;3300uF,20%,50V,GP,BK,22x40,10	
...3 C665	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
...3 CG-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3 CG-TOP	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3 CN01	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
...3 CN02	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
...3 CNM01	3703-001187	CONNECTOR-DIN;64P,2R,FEMALE,STRAIGHT,AU	
...3 CNS01	3703-001187	CONNECTOR-DIN;64P,2R,FEMALE,STRAIGHT,AU	
...3 CNT01	3710-001208	CONNECTOR-SOCKET;32P,2R,2.54mm,STRAIGHT,	
...3 CNT02	3710-001208	CONNECTOR-SOCKET;32P,2R,2.54mm,STRAIGHT,	
...3 CNZ01	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
...3 DW-BOT	AA63-00395B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3 DW-TOP	AA63-00394B	SHIELD CASE-TOP;PRJT P54A,SPTE,T0.5,-,-,	S.N.A
...3 IC102	AA96-00110C	ASSY H/S;-,-,AA62-30013K,SI-3090C,-	S.N.A
....4	1203-000577	IC-VOLTAGE REGULATOR;3090,ZIP,5P,-,PLAST	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30013K	HEAT SINK-ES;-,-,-,-,44/18,-,WHT,A6063 E	S.N.A
...3 IC104	AA96-00110A	ASSY H/S;-,-,AA62-30013K,SI-3050C,-	S.N.A
....4	1203-000203	IC-POSI.ADJUST REG.;3050,TO-220,5P,-,PLA	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30013K	HEAT SINK-ES;-,-,-,-,44/18,-,WHT,A6063 E	S.N.A
...3 IC106	AA96-00110A	ASSY H/S;-,-,AA62-30013K,SI-3050C,-	S.N.A
...3 IC655	AA96-00038A	ASSY H/S;-,SOUND AMP,AA62-30173E,TDA7265	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30173E	HEAT SINK-ES;-,-,T1.0,WHITE,SCREW-HOLE(1	S.N.A
...3 ICZ101	AA96-00164A	ASSY H/S;-,-,AA62-30013G,SI3050C,-	S.N.A
....4	1203-000203	IC-POSI.ADJUST REG.;3050,TO-220,5P,-,PLA	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30013G	HEAT SINK-ES;-,AL,-,WHT,55(18),-,-,-	S.N.A
...3 ICZ102	1203-000119	IC-NEGA.FIXED REG.;7905,TO-220,3P,-,PLAS	
...3 L601	AA29-00004A	FILTER LINE NOISE;-,20UH,3A,AC80-260V,TQ	
...3 L602	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3 MI-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3 MI-TOP	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3 SO-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3 SO-TOP	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
⚠ ...3 TU103S	AA59-00164A	MODULE-RF,SPLITTER;-,UMX-NT-005,-,2IN/3O	
...3 WIRE	AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-,	S.N.A
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	AA39-20010F	LEAD CONNECTOR-ASSY;,1P,YFH800-01,S,700,	
...3	AA95-01844K	ASSY SUB-PCB,SOUND;PCL545R,P54A,AA95-007	
....4 CN601	3703-001175	CONNECTOR-DIN;64P,2R,MALE,ANGLE,AU	
....4 XD601	2801-000186	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,8pF,	

Loc. No.	Code No.	Description ; Specification	Remark
....4	AA97-06988A	ASSY AUTO-SOUND;PCL545R,P54A,AA95-00712C	S.N.A
.....5 CD601	2401-000444	C-AL;10uF,20%,25V,GP,TP,5x5mm,5mm	
.....5 CD603	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 CD604	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
.....5 CD605	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 CD607	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 CD608	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 CD609	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 CD610	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 CD611	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 CD612	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 CD614	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
.....5 CD616	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
.....5 CD621	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD622	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD623	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD624	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD625	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD626	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
.....5 CD627	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD628	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD630	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
.....5 CD632	2401-000444	C-AL;10uF,20%,25V,GP,TP,5x5mm,5mm	
.....5 CD639	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 CD641	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 CD644	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD645	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD650	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 CD652	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 CD653	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD654	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD655	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 CD656	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD657	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD660	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD661	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 CD663	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 LD601	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
.....5 LD602	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
.....5 LD603	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
.....5	AA97-06895A	ASSY SMD-SOUND;PCL545R,P54A,AA95-00712C	S.N.A
......6 CD602	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD606	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD613	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD617	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
......6 CD618	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
......6 CD619	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
......6 CD620	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
......6 CD629	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 CD631	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD633	2203-000332	C-CERAMIC,CHIP;0.012nF,5%,50V,NP0,TP,160	
......6 CD634	2203-000332	C-CERAMIC,CHIP;0.012nF,5%,50V,NP0,TP,160	
......6 CD635	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
......6 CD636	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
......6 CD637	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
......6 CD638	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
......6 CD640	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD642	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 CD643	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 CD646	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 CD647	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 CD648	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 CD649	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 CD662	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD664	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 CD665	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 CD670	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
......6 CD678	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
......6 CD679	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
......6 ICD601	1204-001830	IC-SOUND PROCESSOR;MSP3452G-A2,QFP,80P,7	
......6 ICD602	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
......6 ICD603	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
......6 PCB	AA41-00335A	PCB-SOUND;PCL545R,FR-4,2L,A,1.6T,180X245	S.N.A
......6 QD601	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
......6 QD602	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
......6 RD601	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD602	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD603	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD604	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD605	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD606	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD607	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD608	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD609	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD610	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD611	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD612	2007-001010	R-CHIP;51Kohm,5%,1/16W,DA,TP,1608	
......6 RD613	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 RD614	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD615	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD616	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD617	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD618	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 RD619	2007-001179	R-CHIP;8.2Kohm,5%,1/16W,DA,TP,1608	
......6 RD620	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
......6 RD621	2007-001010	R-CHIP;51Kohm,5%,1/16W,DA,TP,1608	
......6 RD622	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
......6 RD623	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
......6 RD624	2007-001010	R-CHIP;51Kohm,5%,1/16W,DA,TP,1608	
......6 RD625	2007-001179	R-CHIP;8.2Kohm,5%,1/16W,DA,TP,1608	
......6 RD626	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
......6 RD627	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 RD628	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD629	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD630	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 RD631	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 RD632	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
......6 RD633	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
......6 RD634	2007-001179	R-CHIP;8.2Kohm,5%,1/16W,DA,TP,1608	
......6 RD635	2007-001179	R-CHIP;8.2Kohm,5%,1/16W,DA,TP,1608	
......6 RD636	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
......6 RD637	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
......6 RD638	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD639	2007-001010	R-CHIP;51Kohm,5%,1/16W,DA,TP,1608	
......6 RD647	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD648	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD649	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD650	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
....4	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	AA95-01824C	ASSY SUB-PCB,MICOM;PCL545R,P54A,AA95-007	
....4 CN901	3703-001175	CONNECTOR-DIN;64P,2R,MALE,ANGLE,AU	
....4 IC901	AA09-00260A	IC MICOM;SZM-422A2, ,52P,5V,12MHZ,W3-PRO	
....4 IC902	1103-001213	IC-EEPROM;M24C16-WBN6,2048x8Bit,SDIP,8P,	
....4 L903	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
....4 X901	2801-003224	CRYSTAL-UNIT;32.768KHz,20ppm,28-AAY,12.5	
....4	AA97-05187A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
.....5 C901	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
.....5 C904	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C905	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 C906	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C907	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
.....5 C908	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
.....5 C909	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
.....5 C910	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
.....5 C911	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
.....5 C912	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C913	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
.....5 C914	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
.....5 C915	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C916	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
.....5 C917	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 C918	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C919	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
.....5 C920	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C925	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C926	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
.....5 C927	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
.....5 C928	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
.....5 F901	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 IC903	1203-001274	IC-VOL. DETECTOR;7545,TO-92,3P,-,PLASTIC	
.....5 IC904	1203-000515	IC-VOL. DETECTOR;7042,TO-92,3P,177MIL,PL	
.....5 L902	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.....5 L910	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 L911	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L912	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L913	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
.....5 Q901	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q902	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q903	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q909	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5 Q910	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q911	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5	AA97-06149A	ASSY SMD-SUB;PCL545R,P54A	S.N.A
......6 C902	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C903	2203-000595	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,2012	
......6 C921	2203-000595	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,2012	
......6 D901	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 D902	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 D903	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 D904	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 D905	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 DZ903	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 DZ904	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 DZ905	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 DZ911	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
......6 DZ912	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
......6 DZ913	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
......6 DZ916	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 DZ917	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 DZ918	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 PCB	AA41-00338B	PCB-MICOM;PCL545R,FR-4,2L,B,1.6T,180X245	S.N.A
......6 R901	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R902	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 R903	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R904	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R905	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R907	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R908	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R911	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R912	2007-000076	R-CHIP;330ohm,5%,1/16W,DA,TP,1608	
......6 R913	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 R914	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R915	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R916	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
......6 R917	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
......6 R918	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
......6 R919	2007-000458	R-CHIP;18Kohm,5%,1/16W,DA,TP,1608	
......6 R920	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 R921	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
......6 R922	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
......6 R923	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R924	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R925	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
......6 R926	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
......6 R927	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
......6 R928	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
......6 R929	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
......6 R930	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R931	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R932	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R934	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R935	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R936	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R937	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R945	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	
......6 R946	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R947	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R948	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R949	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	
......6 R950	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R951	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	
......6 R958	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R959	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R960	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R961	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R962	2007-000098	R-CHIP;56Kohm,5%,1/16W,DA,TP,1608	
......6 R963	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	
......6 R964	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R965	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R967	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R968	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R969	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R971	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
......6 R972	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
......6 R973	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R974	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R976	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R977	2007-000305	R-CHIP;10Mohm,5%,1/16W,DA,TP,1608	
......6 R978	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R981	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
......6 R982	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
......6 R983	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3	AA95-01806C	ASSY SUB-PCB,DW-SRC;PCL545R,P54A,AA95-00	
....4 CN01	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
....4 CN02	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
....4 CX01	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
....4 DX01	2801-003811	CRYSTAL-UNIT;24.576MHZ,20PPM,28-AAM,30PF	
....4 PX01	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
....4	AA97-05338A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
.....5 CC17	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
.....5 CC19	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CC28	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CC32	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
.....5 CC42	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CC44	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CC45	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
.....5 DC16	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 DC17	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 DC19	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 DC27	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 DC39	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 DL07	2702-001092	INDUCTOR-RADIAL;2.2uH,10%,6x4mm	
.....5 IC12	1203-001140	IC-VOL. DETECTOR;7039,TO-92P,3P,-,PLASTI	
.....5 PC14	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
.....5 PC16	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 PC23	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 PC27	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
.....5 PC41	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 PC43	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 SC01	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 SC03	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 SC22	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
.....5 SC30	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 SC31	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 SC36	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 SC51	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 SC53	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 YC21	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 YC26	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 YC31	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
.....5 YC38	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
.....5 YC57	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 YC62	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 YL02	2702-000160	INDUCTOR-RADIAL;4.7uH,10%,6x6.4mm	
.....5	AA97-06191A	ASSY SMD-SUB;PCL545R,P54A	S.N.A
......6 CC01	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 CC02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CC03	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 CC04	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 CC05	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 CC06	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
......6 CC07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CC08	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
......6 CC09	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 CC10	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CC11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CC12	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CC13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CC14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CC15	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
......6 CC16	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
......6 CC18	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
......6 CC20	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 CC21	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 CC22	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
......6 CC23	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 CC24	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 CC25	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 CC26	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 CC27	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 CC29	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 CC30	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 CC31	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
......6 CC33	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
......6 CC35	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 CC36	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 CC37	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
......6 CC38	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
......6 CC39	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
......6 CC40	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
......6 CC41	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
......6 CC43	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CC47	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CC48	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
......6 CC49	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
......6 CC50	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
......6 CC51	2203-000783	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,1608	
......6 CD01	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 CD02	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 CF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
......6 CF02	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
......6 CL03	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
......6 CL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 CL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 CL07	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 CQ01	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 CQ02	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 CQ03	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 CQ04	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 CQ05	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 CR01	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
......6 CR02	2007-000028	R-CHIP;39OHM,5%,1/10W,DA,TP,2012	
......6 CR03	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
......6 CR04	2007-000028	R-CHIP;39OHM,5%,1/10W,DA,TP,2012	
......6 CR05	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 CR06	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 CR07	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 CR08	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 CR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 CR10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 CR12	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 CR13	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 CR14	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 CR15	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
......6 CR16	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
......6 CR20	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 CR22	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 CR25	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
......6 CR27	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 CR28	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 CR29	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
......6 CR30	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
......6 CR31	2007-000643	R-CHIP;270ohm,5%,1/16W,DA,TP,1608	
......6 CR32	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
......6 CR33	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
......6 CR35	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 CR37	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 CR38	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 CR45	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 CR46	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 CR47	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 CR48	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 CR49	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 CR50	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 CR51	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 CR52	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 CR53	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 CR54	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 CR55	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 CR56	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
......6 DC18	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 DC20	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 DC21	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
......6 DC22	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
......6 DC23	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 DC24	2203-001656	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,1608	
......6 DC25	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 DC26	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 DC28	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 DC29	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 DC30	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 DC31	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 DC32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 DC33	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 DC34	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
......6 DC35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 DC36	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
......6 DC37	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 DC38	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
......6 DD01	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 DD02	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 DD03	0403-001127	DIODE-ZENER;02DZ5.1,5.1,200mW,SOD-323,TP	
......6 DD06	0403-001127	DIODE-ZENER;02DZ5.1,5.1,200mW,SOD-323,TP	
......6 DD07	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 DL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 DL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 DQ01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 DR16	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 DR17	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 DR18	2007-000101	R-CHIP;82Kohm,5%,1/16W,DA,TP,1608	
......6 DR19	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 DR20	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
......6 DR22	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 DR23	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 DR24	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
......6 DR25	2007-000129	R-CHIP;27Kohm,5%,1/16W,DA,TP,1608	
......6 DR26	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 DR27	2007-000127	R-CHIP;9.1Kohm,5%,1/16W,DA,TP,1608	
......6 DR29	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 DR30	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 DR31	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 DR32	2007-000118	R-CHIP;390ohm,5%,1/16W,DA,TP,1608	
......6 DR33	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 DR34	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 DR35	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 DR36	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 DR37	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 DR38	2007-000079	R-CHIP;1.8Kohm,5%,1/16W,DA,TP,1608	
......6 DR40	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 DR41	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 DR44	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 DR46	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
......6 IC01	1204-001598	IC-VIDEO PROCESS;VPC3230D-B2,QFP,80P,-,P	
......6 IC02	1204-001623	IC-VERTICAL PROCESSO;SDA9400,QFP,64P,-,P	
......6 IC03	1002-001045	IC-D/A CONVERTER;9280,8BIT,PLCC,68P,-,-,	
......6 IC06	1204-001372	IC-HOR./VER.PROCESSO;SDA9361,QFP,44P,-,P	
......6 IC07	1204-001550	IC-VIDEO PROCESS;CXA2101AQ,QFP,80P,-,PLA	
......6 IC11	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
......6 IC13	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
......6 PC01	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 PC02	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 PC03	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
......6 PC04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC05	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
......6 PC06	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 PC07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC09	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC10	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC12	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
......6 PC13	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
......6 PC15	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
......6 PC17	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 PC18	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 PC19	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
......6 PC20	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 PC21	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 PC22	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	

Loc. No.	Code No.	Description ; Specification	Remark
......6 PC24	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 PC25	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 PC26	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
......6 PC28	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
......6 PC29	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC30	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC31	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC33	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC34	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC36	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC37	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC38	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC39	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC40	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC42	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC47	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
......6 PC48	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
......6 PC49	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
......6 PC52	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 PC53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PC54	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 PC55	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 PC56	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 PC57	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 PC58	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
......6 PC78	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 PCB	AA41-00418C	PCB-DW;SP55W3HR,FR-4,4L,C,1.6T,245X245,J	S.N.A
......6 PIC01	1204-001598	IC-VIDEO PROCESS;VPC3230D-B2,QFP,80P,-,P	
......6 PIC02	1109-001144	IC-FIFO;81V04160,2x256Kx8Bit,TQFP,100P,1	
......6 PIC04	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
......6 PL01	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 PL02	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 PR01	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
......6 PR02	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
......6 PR03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 PR04	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 PR06	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 PR07	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 PR08	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 PR11	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
......6 PR12	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
......6 PR19	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
......6 PR20	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
......6 SC02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC05	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC06	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC09	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC12	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC23	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC24	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC25	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
......6 SC26	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
......6 SC27	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC28	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
......6 SC29	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC33	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
......6 SC34	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC37	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC38	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
......6 SC52	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SC54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 SF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
......6 SL01	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 SL02	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 SL03	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 SL04	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	

Loc. No.	Code No.	Description ; Specification	Remark
......6 SL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 SL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 SL08	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 SL09	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
......6 SR01	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 SR02	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 SR03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 SR04	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
......6 SR05	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
......6 SR06	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
......6 SR07	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
......6 SR08	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 SR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 SR11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 SR12	2007-001056	R-CHIP;6.2Kohm,5%,1/16W,DA,TP,1608	
......6 SR13	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
......6 SR14	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 SR15	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 SR16	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
......6 SR17	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 SR18	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 SR19	2007-000381	R-CHIP;13Kohm,5%,1/16W,DA,TP,1608	
......6 SR21	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
......6 SR22	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 SR23	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 SR24	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 SR25	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP,2012	
......6 YC01	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC02	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC03	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC04	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC05	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC06	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC07	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC08	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC09	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC10	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC11	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC12	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC13	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC14	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC15	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC16	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC17	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC18	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC19	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC20	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC22	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC23	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 YC24	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC25	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC27	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 YC28	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 YC29	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
......6 YC30	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC32	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 YC33	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 YC34	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 YC35	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 YC36	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 YC37	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 YC39	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
......6 YC40	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
......6 YC45	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC46	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 YC47	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 YC48	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 YC49	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC50	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
......6 YC51	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
......6 YC52	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
......6 YC53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC55	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC56	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC58	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC59	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
......6 YC60	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 YC63	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
......6 YC66	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
......6 YD01	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
......6 YD02	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
......6 YD03	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
......6 YD04	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
......6 YD05	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
......6 YF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
......6 YF02	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
......6 YF03	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
......6 YF04	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
......6 YF05	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
......6 YL01	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
......6 YQ01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 YQ02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 YQ03	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 YQ06	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 YQ08	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 YQ11	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 YQ12	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 YR05	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR06	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR07	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR08	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR100	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR101	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR102	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR103	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 YR104	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
......6 YR105	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
......6 YR11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR12	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR14	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 YR15	2007-000939	R-CHIP;47Kohm,1%,1/16W,DA,TP,1608	
......6 YR18	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR23	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 YR24	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 YR25	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR26	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR27	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR28	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR29	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
......6 YR30	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR31	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
......6 YR32	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR33	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
......6 YR40	2007-000691	R-CHIP;3.3Mohm,5%,1/16W,DA,TP,1608	
......6 YR41	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR43	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
......6 YR44	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
......6 YR45	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
......6 YR46	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR47	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR48	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR50	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
......6 YR51	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR53	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR56	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR59	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
......6 YR60	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR61	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 YR62	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 YR63	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR64	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR65	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
......6 YR77	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
......6 YR78	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
......6 YR79	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
......6 YR83	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR85	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR86	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR88	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 YR89	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 YR90	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR91	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR92	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 YR98	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 YR99	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3	AA97-03130A	ASSY ROBOT-MAIN;HCL473WX/XAA,P54A,U.S.A	S.N.A
....4 CN201	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
....4 CN501	3711-003051	CONNECTOR-HEADER;BOX,8P,1R,2.5MM,STRAIGH	
....4 CN801	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
....4 CN901	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
....4 CNZ02	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
....4 IC103	AA96-50147B	ASSY H/S;-,TR,AA62-30012B,KA7808,-	S.N.A
.....5	1203-000293	IC-POSI.FIXED REG.;7808,TO-220,3P,-,PLAS	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30012B	HEAT SINK-ES;-,A6063 EXTR,-,-,45(16) T02	S.N.A
....4 IC107	AA96-00111L	ASSY H/S;-,-,AA62-30013L,KA78R12,-	S.N.A
.....5	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30013L	HEAT SINK-ES;-,-,-,-,44/22,-,WHT,-,-,-,-	S.N.A
⚠ 4 TU101S	AA40-00032A	TUNER-F/S;TCPN3081PC09A(S),NTSC,TR,181CH	
⚠ 4 TU102S	AA40-00032A	TUNER-F/S;TCPN3081PC09A(S),NTSC,TR,181CH	
....4	AA97-04483A	ASSY AUTO-MAIN;HCL473WX/XAA,P54A,U.S.A	S.N.A
.....5 C100	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
.....5 C101	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
.....5 C102	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
.....5 C103	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C104	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
.....5 C105	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C106	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C107	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C110	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C111	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
.....5 C117	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C118	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C119	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C120	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C121	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C122	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C123	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C124	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C125	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C126	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C127	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C128	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C129	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C130	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C131	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C132	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C133	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C134	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C135	2401-003034	C-AL;220uF,20%,16V,WT,TP,8x11.5,5	
.....5 C136	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C137	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
.....5 C138	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
.....5 C140	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C142	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C144	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C145	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C147	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C149	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C150	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C151	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C152	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C153	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C154	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C155	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C157	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C191	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C666	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C667	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
.....5 C668	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
.....5 C669	2401-000404	C-AL;10uF,20%,16V,BP,TP,5x11,5	
.....5 C676	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
.....5 C686	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
.....5 C687	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
.....5 C688	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C689	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C690	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C691	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
.....5 C701	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C801	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
.....5 C901	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
.....5 C902	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C903	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 CN101	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
.....5 CN601	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
.....5 CN602	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
.....5 CN902	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
.....5 CNY01	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
.....5 CZ101	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
.....5 CZ102	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 CZ103	2401-000689	C-AL;2200uF,20%,16V,GP,TP,13x25,5	
.....5 CZ105	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 CZ106	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 CZ107	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 CZ109	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 CZ110	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 D603	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D604	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D605	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D606	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D664	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 D665	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D701	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D702	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D703	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 DZ665	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
.....5 DZ701	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
.....5 DZ801	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
.....5 EL01	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL02	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL03	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL05	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL06	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL07	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL08	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL09	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL10	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL11	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL12	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL13	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL14	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL15	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL16	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL17	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL18	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL19	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL20	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL21	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL22	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL23	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL24	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL25	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL26	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL27	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL28	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL29	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL30	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL31	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EL32	AA60-40011B	EYELET;ID2.2,OD3.2,-,-,BSP,-	S.N.A
.....5 EY01	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY02	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY03	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY04	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY05	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY06	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY07	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY08	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY09	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY10	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY11	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY12	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY13	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 EY14	AA60-40011A	EYELET;ID2.0,OD2.8,-,-,BST,-	S.N.A
.....5 GTM02	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
.....5 GTM04	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	S.N.A
.....5 L100	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
.....5 L101	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
.....5 L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L104	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L105	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L107	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L108	2701-001007	INDUCTOR-AXIAL;24uH,10%,4.5x14mm	
.....5 L110	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
.....5 L111	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L112	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L113	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L603	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L604	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L605	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L901	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 LDZ101	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
.....5 LDZ102	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
.....5 LZ101	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
.....5 LZ102	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
.....5 LZ103	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
.....5 LZ104	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
.....5 PCB	AA41-00332D	PCB-MAIN;PCL545R,FR-1,1L,D,1.6T,330X245,	S.N.A
.....5 Q601	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q666	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q668	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q702	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 R102	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R103	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R104	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R105	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R106	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R107	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R110	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R111	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R112	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R113	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R115	2001-000869	R-CARBON;56OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R117	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R602	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R603	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R604	2001-001168	R-CARBON(S);6.8KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R605	2001-001106	R-CARBON(S);220KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R661	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
.....5 R662	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
.....5 R663	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R664	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
.....5 R665	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R666	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R669	2001-001121	R-CARBON(S);3.6KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R670	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R671	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R672	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R673	2001-001086	R-CARBON(S);18KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R673A	2001-001142	R-CARBON(S);3KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R681	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
.....5 R682	2004-002019	R-METAL(S);33Kohm,1%,1/2W,AA,TP,2.5x6.5m	
.....5 R683	2004-002019	R-METAL(S);33Kohm,1%,1/2W,AA,TP,2.5x6.5m	
.....5 R685	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
.....5 R686	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
.....5 R687	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R689	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R690	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R691	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R701	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R702	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R703	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R704	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R888	2003-001098	R-METAL OXIDE(S);22Kohm,5%,3W,AA,TP,6x16	
.....5 RF101	2008-001116	R-FUSIBLE(S);0.68ohm,10%,2W,AG,TP,3.9x12	
.....5 RF104	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
.....5 RF121	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 RZ01	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 RZ02	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ101	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ102	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	AA39-20577B	LEAD CONNECTOR-ASSY;P54A/SVP-55W3HD,UL16	
...3	AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-,	S.N.A
...3	AA59-00218A	MODULE;SVP-5200,F301-P03,BK	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	AA95-01799R	ASSY SUB-PCB,CONV MDL;SVP-54T6SR,P54A,AA	
....4 CN01	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
....4 CN04	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
....4 L01	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
....4	AA97-06265A	ASSY SMD-SUB;SVP-54T6SR,P54A	S.N.A
.....5 C01	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C03	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C05	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C07	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C10	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C12	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C15	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C17	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C18	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C19	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....5 C20	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C22	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C23	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C24	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C25	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C26	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C27	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C28	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C29	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C30	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C31	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C33	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C34	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C36	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C40	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C41	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C42	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C43	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C44	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C45	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C46	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
.....5 C47	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
.....5 C48	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
.....5 C49	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C50	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
.....5 C51	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
.....5 C52	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
.....5 C53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C54	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
.....5 C55	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
.....5 C56	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
.....5 C57	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C58	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C59	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
.....5 C60	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
.....5 C61	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
.....5 C62	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C63	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
.....5 C64	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
.....5 C65	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
.....5 C66	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C67	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
.....5 C68	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
.....5 C69	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
.....5 C70	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.....5 C71	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C72	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.....5 C73	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.....5 C74	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C75	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C76	2203-001034	C-CERAMIC,CHIP;5.6nF,10%,50V,X7R,TP,1608	
.....5 C77	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C78	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C79	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C80	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C81	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C82	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C83	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C84	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C86	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C87	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C88	2203-001245	C-CERAMIC,CHIP;0.082nF,5%,50V,NP0,TP,201	
.....5 C89	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C90	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....5 C91	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C92	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C93	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 D01	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D02	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D03	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D04	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D05	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 DZ01	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.....5 DZ02	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.....5 DZ03	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.....5 DZ04	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.....5 EF01	2901-000229	FILTER-EMI SMD;50V,0.3A,-,22000pF,4.5x3.	
.....5 EF02	2901-000229	FILTER-EMI SMD;50V,0.3A,-,22000pF,4.5x3.	
.....5 EF03	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
.....5 EF04	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 EF05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 EF06	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
.....5 EF07	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 EF08	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 EF09	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 EF10	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 EF13	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
.....5 EF14	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
.....5 IC01	AA13-00104A	IC ASIC;SDC11,SVP-54T6SR,208P,-0.3VTO3.8	
.....5 IC02	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
.....5 IC04	1203-001824	IC-VOL. DETECTOR;7042,SOT-89,3P,-,PLASTI	
.....5 IC05	1103-000180	IC-EEPROM;24C16,2Kx8Bit,SOP,8P,150MIL,10	
.....5 IC06	AA09-00032A	IC MICOM;,TSC87251G2D-OTP,4.5 TO 5.5V,-,	
.....5 IC08	1201-001520	IC-VIDEO AMP;EL2250CS,SOIC,8P,150MIL,DUA	
.....5 IC09	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	
.....5 IC10	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....5 IC11	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....5 IC12	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....5 IC13	1201-001135	IC-OP AMP;324,SOP,ST,14P,150MIL,QUAD,100	
.....5 IC14	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....5 IC15	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....5 IC16	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....5 IC17	1209-001163	IC-PLL;TLC2932IPWLE,SOP,14P,-,PLASTIC	
.....5 OSC01	2804-001479	OSCILLATOR-CLOCK;24MHZ,100PPM,50PF,TP,5V	
.....5 PCB	AA41-00529A	PCB-CONVERGENCE MODULE;SVP-54T6SR,FR-4,4	S.N.A
.....5 Q01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5 Q02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5 R01	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R02	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R04	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R10	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R100	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.....5 R101	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.....5 R102	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.....5 R103	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.....5 R109	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.....5 R11	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R110	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R111	2007-000102	R-CHIP;100Kohm,5%,1/16W,DA,TP,1608	
.....5 R117	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R118	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
.....5 R119	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R12	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R120	2007-000856	R-CHIP;4.3KOHM,1%,1/10W,DA,TP,2012	
.....5 R121	2007-000109	R-CHIP;1Mohm,5%,1/16W,DA,TP,1608	
.....5 R122	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R123	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R124	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R125	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R126	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R127	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R13	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R134	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R14	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R15	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R16	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R17	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
.....5 R18	2007-000381	R-CHIP;13Kohm,5%,1/16W,DA,TP,1608	
.....5 R19	2007-001056	R-CHIP;6.2Kohm,5%,1/16W,DA,TP,1608	
.....5 R20	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
.....5 R21	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R22	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R23	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R28	2007-001163	R-CHIP;75OHM,1%,1/10W,DA,TP,2012	
.....5 R29	2007-001163	R-CHIP;75OHM,1%,1/10W,DA,TP,2012	
.....5 R30	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
.....5 R32	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
.....5 R33	2007-000028	R-CHIP;39OHM,5%,1/10W,DA,TP,2012	
.....5 R34	2007-000028	R-CHIP;39OHM,5%,1/10W,DA,TP,2012	
.....5 R37	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R38	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R39	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R40	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R41	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R42	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R43	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R44	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R45	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R46	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R47	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R48	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R49	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
.....5 R50	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R51	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R52	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R53	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R54	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
.....5 R55	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R56	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R57	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R58	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R59	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
.....5 R60	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R61	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R62	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R63	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R64	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
.....5 R65	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R66	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R67	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R68	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R69	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
.....5 R70	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R71	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R72	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R73	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R74	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
.....5 R75	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R77	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 R78	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 R79	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 R80	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 R81	2007-000757	R-CHIP;330KOHM,5%,1/10W,DA,TP,2012	
.....5 R82	2007-000757	R-CHIP;330KOHM,5%,1/10W,DA,TP,2012	
.....5 R83	2007-000757	R-CHIP;330KOHM,5%,1/10W,DA,TP,2012	
.....5 R84	2007-000757	R-CHIP;330KOHM,5%,1/10W,DA,TP,2012	
.....5 R85	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R86	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R87	2007-000704	R-CHIP;3.6Kohm,5%,1/16W,DA,TP,1608	
.....5 R88	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R89	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 R90	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 R91	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 R92	2007-000125	R-CHIP;3.9Kohm,5%,1/16W,DA,TP,1608	
.....5 R93	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R94	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R95	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.....5 RN01	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
.....5 RN02	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
.....5 RN03	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
.....5 RN04	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
.....5 RN05	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
.....5 RN08	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
...3	AA95-01793A	ASSY SUB-PCB,CAPTION;PCL545R,P54A,AA95-0	
....4 BK01	AA61-10068A	BRACKET-PCB;M2160,SPTE,T0.3,-,-,-,-	S.N.A
....4 CNC01	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5mm,ANG	
....4 CNC02	3711-002708	CONNECTOR-HEADER;NOWALL,10P,1R,2.5mm,ANG	
....4 ICC01	1204-001718	IC-DECODER;Z86129,DIP,18P,300MIL,PLASTIC	
....4 ICC02	1001-001083	IC-VIDEO SWITCH;NJM2248D,-,DIP,8P,300MIL	
....4 ICC03	1001-001083	IC-VIDEO SWITCH;NJM2248D,-,DIP,8P,300MIL	
....4	AA97-05186A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
.....5 CC01	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
.....5 CC02	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 CC03	2201-000600	C-CERAMIC,DISC;0.56nF,10%,50V,Y5P,TP,5x3	
.....5 CC04	2401-000223	C-AL;100nF,20%,50V,LL,TP,5x11mm,5mm	
.....5 CC05	2301-000310	C-FILM,PEF;68nF,5%,50V,TP,8.0X8.5X4.0X5,	
.....5 CC06	2301-000301	C-FILM,PEF;6.8nF,5%,50V,TP,6.5X5.5X3.0X5	
.....5 CC07	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 CC08	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 CC09	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 CC10	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
.....5 CC11	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
.....5 CC12	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
.....5 CC13	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 CC14	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 CC15	2201-000600	C-CERAMIC,DISC;0.56nF,10%,50V,Y5P,TP,5x3	
.....5 CC16	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 CC19	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 DC01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 DC02	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 DC03	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 LC01	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 PCB	AA41-00337A	PCB-CAPTION;PCL545R,FR-1,1L,A,1.6T,245X2	S.N.A
.....5 QC01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 QC02	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 RC01	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
.....5 RC02	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
.....5 RC03	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC04	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC05	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC06	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC07	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC08	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC09	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC10	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
.....5 RC11	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC12	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC13	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC14	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC15	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC16	2004-000218	R-METAL;10Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
.....5 RC17	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC18	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC19	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC20	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC21	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC22	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC23	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC24	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RC25	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
.....5 RC30	2001-000708	R-CARBON;39OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	AA95-01746A	ASSY SUB-PCB 3D COMB;WT-32Z5HD,K54A,AA95	
....4 CON01	3711-002705	CONNECTOR-HEADER;NOWALL,7P,1R,2.5mm,ANGL	
....4 CON02	3711-002703	CONNECTOR-HEADER;NOWALL,5P,1R,2.5mm,ANGL	
....4 XTAL01	2801-000199	CRYSTAL-UNIT;20MHz,50ppm,28-AAA,16pF,50o	

Loc. No.	Code No.	Description ; Specification	Remark
....4	AA63-40014A	SHIELD-CASE,T;-,SPTE,T0.5,-,-,-,SCT51A	S.N.A
....4	AA97-07193A	ASSY AUTO-3D COMB;WT-32Z5HD,K54A,AA95-00	S.N.A
.....5 CD10	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CD12	2401-002464	C-AL;47uF,20%,16V,BP,TP,8x11.5,5	
.....5 CD18	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
.....5 CD23	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 CD24	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
.....5 CD40	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
.....5 CD45	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
.....5 CD47	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
.....5 CD57	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CD59	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CD60	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CD64	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CD66	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CD68	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 CD71	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 LD01	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
.....5 LD03	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
.....5 LD05	2702-001096	INDUCTOR-RADIAL;33uH,10%,6x4mm	
.....5 LD06	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
.....5 LD07	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5	AA97-06948A	ASSY SMD-3D COMB;WT-32Z5HD,K54A,AA95-009	S.N.A
......6 CD11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD20	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD22	2203-001034	C-CERAMIC,CHIP;5.6nF,10%,50V,X7R,TP,1608	
......6 CD41	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD42	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD43	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD44	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD46	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD50	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD51	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD52	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD55	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD56	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD58	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD62	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD63	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD67	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD69	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD72	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD74	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD75	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	
......6 CD80	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
......6 CD81	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD84	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD85	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
......6 CD86	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD87	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD88	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	
......6 CD89	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	
......6 CD90	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 CD91	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 DD01	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 DD02	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 DD03	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 FD00	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
......6 FD01	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
......6 FD02	2909-001052	FILTER-LC;3.58MHz,3MHz,1.5dB,TP,11dB/1.0	
......6 FD03	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
......6 IC01	1204-001556	IC-SEPARATOR;UPD64082GF,QFP,100P,-,PLAST	
......6 IC02	1105-001334	IC-DRAM;4E151612,1Mx16Bit,TSOP,44P,400MI	
......6 IC04	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
......6 JD01	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
......6 JD04	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
......6 LD09	2703-000271	INDUCTOR-SMD;4.7uH,10%,2x1.25x1.25mm	
......6 LD10	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
......6 PCB	AA41-00128E	PCB-3D COMB FILTER;CT-29A7DR,FR-4,2L,E,1	S.N.A
......6 QD10	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 QD11	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 QD12	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 QD13	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 QD14	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 QD15	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 QD16	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 QD17	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 QD18	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 QD19	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 QD20	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 QD21	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 QD22	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 QD23	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 QD24	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 QD25	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 QD26	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 QD27	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 QD28	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 QD40	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 QD41	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 RD00	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD01	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD02	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
......6 RD03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD04	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
......6 RD05	2007-000088	R-CHIP;7.5Kohm,5%,1/16W,DA,TP,1608	
......6 RD06	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD07	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD08	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
......6 RD09	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
......6 RD10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD12	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
......6 RD13	2007-000088	R-CHIP;7.5Kohm,5%,1/16W,DA,TP,1608	
......6 RD14	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
......6 RD15	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD16	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
......6 RD17	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
......6 RD18	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD19	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
......6 RD20	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	
......6 RD21	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
......6 RD22	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD23	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
......6 RD24	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
......6 RD25	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
......6 RD26	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 RD27	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 RD37	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	
......6 RD38	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD39	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD40	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
......6 RD41	2007-000052	R-CHIP;10Kohm,1%,1/16W,DA,TP,1608	
......6 RD42	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
......6 RD43	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
......6 RD50	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD51	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD59	2007-000102	R-CHIP;100Kohm,5%,1/16W,DA,TP,1608	
......6 RD62	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
......6 RD63	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
......6 RD64	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD65	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD66	2007-000096	R-CHIP;30Kohm,5%,1/16W,DA,TP,1608	
......6 RD67	2007-000125	R-CHIP;3.9Kohm,5%,1/16W,DA,TP,1608	
......6 RD68	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
......6 RD69	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 RD70	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 RD71	2007-000234	R-CHIP;1.3Kohm,5%,1/16W,DA,TP,1608	
......6 RD72	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 RD73	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD74	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 RD75	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD76	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD77	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD78	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD79	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD82	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
......6 RD83	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
......6 RD84	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
......6 RD85	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
......6 RD86	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
......6 RD87	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 RD88	2007-000211	R-CHIP;1.1Kohm,5%,1/16W,DA,TP,1608	
......6 RD89	2007-000113	R-CHIP;33ohm,5%,1/16W,DA,TP,1608	
......6 RD90	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD91	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 RD92	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 RD93	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
......6 RD94	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
......6 RD95	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 RD96	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 RD97	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
......6 RD98	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3	AA65-30105B	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
...3	AA65-30104B	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A

ASSY PRT

Loc. No.	Code No.	Description ; Specification	Remark
1 *	BP91-00022A	ASSY PRT;HCL652WX/XAA	S.N.A
..2	AA91-02201B	ASSY CPT-G;P16LSG03HKA,55,+380MGDELTA 2	
...3 BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3	AA61-00807B	CASE-COUPLER,G;PROJ,ALDC,T8,BLK	S.N.A
...3	AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3	AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
....4	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
....4	AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
....4	AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3	AA67-00158A	LENS;,DELTA 240,GREEN,C-ELEMENT	
...3	AA67-00146A	LENS-ASSY;,DELTA 260,CLEAR A/B	
...3	AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	S.N.A
...3	AA26-30006F	TRANS FBT;-,FWZ-50A001C,55',30KV	
...3	AA03-00201A	CRT MONO;P16LSG03HKA,FREE,3.30mH,2.20mH,	
...3	AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3	AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3	AA60-00074A	SPACER-DY;PJT,SILICON RUBBER,-,-,-,GRAY,	S.N.A
...3	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3	AA27-00151A	DEFLECTION YOKE;-,CDY-PT0702(X),PRT,P16L	
..2	AA91-02204A	ASSY CPT-B;P16LSG03BMB,65,+380MG,DELTA	
...3 BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	S.N.A
...3	AA61-00808B	CASE-COUPLER,B;PROJ,ALDC,T8,BLK	S.N.A
...3	AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3	AA60-00128B	SPACER-CRT;PROJ(65),SILICONE,D/GRAY	S.N.A
...3	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
....4	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
....4	AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
....4	AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3	AA67-00156A	LENS;,DELTA 240,CLEAR,C-ELEMENT	
...3	AA67-00146A	LENS-ASSY;,DELTA 260,CLEAR A/B	
...3	AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3	AA61-00811B	HOLDER-CRT;PROJ(65),PC/ABS GF 20%,BLK	S.N.A
...3	AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3	AA26-30006F	TRANS FBT;-,FWZ-50A001C,55',30KV	
...3	AA03-00202A	CRT MONO;P16LSG03BMB,FREE,3.30mH,2.20mH,	
...3	AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3	AA60-00074A	SPACER-DY;PJT,SILICON RUBBER,-,-,-,GRAY,	S.N.A
...3	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3	AA33-00008A	MAGNET CONVERGENCE;JH92LTU-36A,7inchPRT,	
...3	AA27-00151A	DEFLECTION YOKE;-,CDY-PT0702(X),PRT,P16L	
..2	AA91-02204B	ASSY CPT-R;P16LSG03RJA,65,+380MGDELTA 2	
...3 BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	S.N.A
...3	AA61-00806B	CASE-COUPLER,R;PROJ,ALDC,T8,BLK	S.N.A
...3	AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3	AA60-00128B	SPACER-CRT;PROJ(65),SILICONE,D/GRAY	S.N.A
...3	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
....4	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
....4	AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
....4	AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3	AA67-00157A	LENS;,DELTA 240,RED,C-ELEMENT	
...3	AA67-00146A	LENS-ASSY;,DELTA 260,CLEAR A/B	
...3	AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3	AA61-00811B	HOLDER-CRT;PROJ(65),PC/ABS GF 20%,BLK	S.N.A
...3	AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3	AA26-30006F	TRANS FBT;-,FWZ-50A001C,55',30KV	
...3	AA03-00200A	CRT MONO;P16LSG03RJA,FREE,3.30mH,2.20mH,	
...3	AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3	AA60-00074A	SPACER-DY;PJT,SILICON RUBBER,-,-,-,GRAY,	S.N.A
...3	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3	AA33-00008A	MAGNET CONVERGENCE;JH92LTU-36A,7inchPRT,	
...3	AA27-00151A	DEFLECTION YOKE;-,CDY-PT0702(X),PRT,P16L	

ASSY COVER FRONT

Loc. No.	Code No.	Description ; Specification	Remark
1 *	BP90-00001B	ASSY COVER FRONT;65W3,HCM653WX/XAC	S.N.A
..2 AP+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2 ASP+CW	6005-001004	SCREW-WOOD;HH,+,M4,L27,BLK,SWRCH18A	S.N.A
..2 BCM+CW	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL)	S.N.A
..2 CBB+AP	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	S.N.A
..2 CBB+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2 CFB+CW	6005-001005	SCREW-WOOD;HH,+,M4.0,L19,NI PLT,SWRCH18A	S.N.A
..2 FP+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2 HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2 HM+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2 HV+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	AA67-00164A	MIRROR-FRONT;65W3,GLASS ,1177*891*614,FS	
..2	AA91-00757C	ASSY-DOOR,RACK;,HB GRAY,SS1028+DG703P,W3	
...3 AHD+DR	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	S.N.A
...3 DR+BD	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	S.N.A
...3	AA64-02206B	WINDOW-DOOR;W3,GLASS,T3.0,BR	
...3	AA73-00007B	RUBBER-CAP;W3,MBR,GRAY,60	
...3	AA91-00758A	ASSY-HINGE,DOOR(R);SPRING,SECC T1.6 W3,W	
...3	AA64-02066E	DOOR-RACK;47.55.65W3,HIPS HB,GRAY,SS1028	
...3	AA61-00856B	BRACKET-DOOR;47W3,SECC,T1.0,BLK	S.N.A
...3	AA61-00782B	BRACKET-MAGNET;W3,SPC,T2.0,FZW	S.N.A
..2	AA91-00755M	ASSY-C/FRONT,BOT;,HIPS V0,SS1028+DG703P,	
...3	AA64-02064K	CABINET-FRONT,BOT;55,65W3,HIPS V0,GRAY,S	S.N.A
...3	AA64-02080C	KNOB POWER;W3,ABS HB,BLK,BL903	
...3	AA64-02081B	KNOB-CH,VOL;W3,ABS HB,BLK,CHROME,GLOSSY	
...3	AA64-02082B	WINDOW-RMC,LED;W3,PC,CLEAR	
...3	AA64-02205C	BADGE-DECORATION;W3,NI+AL FORGING+NI,DG7	S.N.A
...3	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
...3	AA61-00785B	GUIDE-KNOB,POWER;W3,ABS HB ,BLK,CHROME,G	S.N.A
...3	AA61-00786C	HOLDER-CONTROL;W3,ABS HB,BLK,BL903	
...3	AA61-00791B	HOLDER-FRONT,BOT;W3,ABS HB,L40,BLK,DO	S.N.A
...3	AA61-01068A	HOLDER-CABINET,BOT(B);W3,ABS HB,L40,BLK,	S.N.A
...3	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,	S.N.A
..2	AA91-00754D	ASSY-C/FRONT,MASK;ABS HB,DG703P,65W3(HCM	
...3	AA63-00380A	COVER-CORNER;PJT,POLYESTER,-,-,-,-,CLR,#	S.N.A
...3	AA64-02246B	BADGE-BRAND;55W3,AL FORGING,L78,DG703P,S	S.N.A
...3	AA64-02078E	CABINET-FRONT,MASK,BOT;65W3,ABS HB,GRAY,	S.N.A
....4	AA64-02078A	CABINET-FRONT,MASK,BOT;65W3,ABS HB,GRAY,	S.N.A
...3	AA64-02077E	CABINET-FRONT,MASK,TOP;65W3,ABS HB,GRAY,	S.N.A
....4	AA64-02077A	CABINET-FRONT,MASK,TOP;65W3,ABS HB,L1441	S.N.A
...3	AA64-02060E	CABINET-FRONT,MASK(L);65W3,ABS HB,GRAY,D	S.N.A
...3	AA64-02060D	CABINET-FRONT,MASK(L);65W3,ABS HB,GRAY,D	S.N.A
...3	AA63-00063A	SPACER-DUAL,LOCK;SVP-614J,#400,-,-,-,-,-	S.N.A
..2	AA73-00005B	RUBBER-CAP;FLAT,PRJ,SILICONE RUBBER,WHIT	
..2	AA63-60002V	SPACER-FELT;-,FELT,-,-,-,BLK,T0.3,-,60X4	S.N.A
..2	AA91-00761E	ASSY-CABINET,WOOD;,WOOD,XAC,65W3	S.N.A
...3 B+FRAM	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 CAS+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 HCM+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 HCW+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 HM+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 HW+CW	AA60-10051B	SCREW-WOOD;-,SWRCH18A,M3.5,L11,RH,+,-,-,	S.N.A
...3 RAIL+R	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 SID+DO	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 SPK+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3	AA64-02209C	CABINET-WOOD;65W3,WOOD,MIJU	S.N.A
...3	AA63-00348B	COVER-DUCT;54,62J8,HIPS,-,-,-,HB,BLK,-	S.N.A
...3	AA63-00193B	COVER-AIRVENT;533R,HIPS,-,-,-,VO,BLK,-	S.N.A
...3	AA61-20219A	HOLDER-FRONT,BOT,E;,ABS,HB,L40,BLK	S.N.A
...3	AA61-10387A	BRACKET-GRILLE;SVP-462J,SECC-1,T0.5,-,-,	S.N.A
...3	AA61-01212C	HOLDER-SCREEN,TB;W3,W1,ABS HB,L1439,BLK,	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
...3	AA61-01070A	HOLDER-CABINET,BOT(D);W3,ABS HB,L990,BLK	S.N.A
...3	AA61-01067A	HOLDER-CABINET,BOT(A);W3,ABS HB,L40,BLK,	S.N.A
...3	AA61-00999A	HOLDER-DUAL,LOCK;W3,W1,ABS HB,BLK	S.N.A
...3	AA64-02319A	CABINET-HANDLE,WOOD;65W3,ABS HB,BLK	
...3	AA98-00049B	ASSY-LEAD,CON;-,LEAD-CON,CORE,AA39-20505	S.N.A
....4	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	AA39-00287B	LEAD CONNECTOR-ASSY;PCL54RX,UL2547#26,UL	
...3	AA61-00792B	HOLDER-SENSOR;W3,PC VIOLET	S.N.A
...3	AA61-01117B	HOLDER-SENSOR;W3,PC VIOLET	S.N.A
...3	AA61-00508D	HOLDER-JERSEY;W3,ABS V0,GRAY,G4309	S.N.A
...3	BP61-00075A	HOLDER-JERSEY,ASSY;W3,ABS V0,GRAY,63-000	S.N.A
....4	AA63-00099C	SPACER-FELT;47W3,FELT,BLK,T0.35,30*30	S.N.A
....4	AA61-00508D	HOLDER-JERSEY;W3,ABS V0,GRAY,G4309	S.N.A
...3	AA91-00750A	ASSY-MAGNET,PUSH;,MAGNET,W3	
...3	AA65-00017A	CLAMPER CORE-WIRE;ALL MODEL,NYLON6.6,BLK	S.N.A
...3	AA61-00973D	HOLDER-SCREEN,L;65W3,ABS HB,BLK	S.N.A
...3	AA61-00097A	HOLDER-WIRE;-,NYLON 6/6,-,-,-,NTR,-	S.N.A
...3	AA61-00094C	HOLDER-RAIL;PCJ533R,ABS,-,-,-,BLK,HB,480	S.N.A
...3	AA60-00134A	SPACER-COVER,DUST;65W3,SPONGE,T3.0,94HF-	S.N.A
...3	AA60-00078B	SPACER-DUAL,LOCK;W3,#250,19*40	S.N.A
...3	AA39-00042C	LEAD CONNECTOR-ASSY;,1.75UF,REC,REC,350M	
...3	6005-001006	SCREW-WOOD;FH,+,M3,L15.0,ZPC(BLK),SWRCH1	
...3	3001-000176	SPEAKER;30W,8ohm,93dB,65Hz	
...3	3001-000153	SPEAKER;20W,8ohm,93dB,1.3KHz	
...3	AA61-00357E	HOLDER-MIRROR;48J8,ABS,-,-,-,BLK,HB,L540	S.N.A
...3	AA61-00864A	HOLDER-PCB;W3,HIPS,V0,BLK	S.N.A
...3	AA61-00858B	BRACKET-FRAME;W3,SECC,T2.0	S.N.A
...3	AA61-00857B	BRACKET-NUT,INSERT;W3,M3 ZN	S.N.A
...3	AA61-00795C	RAIL-DOOR,L;W3,ABS HB,BLK	S.N.A
...3	AA61-00795B	RAIL-DOOR,R;W3,ABS HB,BLK	S.N.A
...3	AA61-00790C	HOLDER-MASK;W3,ABS HB,L610,BLK	S.N.A
...3	AA61-00507B	HOLDER-CABINET,WOOD;43,54,62J8,ABS,-,-,-	S.N.A
...3	AA61-00506B	HOLDER-CRT,MAIN;43,54,62J8,HIPS,-,-,-,BL	S.N.A
...3	AA61-00458B	CASTER;-,TP4020-05 PLY,-,OH56,-,-,SR44.4	S.N.A
..2	AA67-00125A	SCREEN-LENTICULAR;65W,-,T0.73,1466*862,P	
..2	AA67-00202A	SCREEN-TINT;65W,1466*862,T=0.73,P=0.52	
..2	AA61-00357H	HOLDER-MIRROR;W3,ABS HB,L1060,BLK	S.N.A
..2	AA60-00133A	SPACER-COVER,DUST;65W3,94HF-1,T3.0	S.N.A
..2	AA26-00101A	TRANS FBT;FWZ50A001E/FFA97513B,12KV,5P,-	
..2	6001-000137	SCREW-MACHINE;BH,+,M3,L8,ZPC(YEL),SM20C,	S.N.A
..2	AA67-00133A	SUN SCREEN-AG;65W,-,T=82%,1468*864*2,-,-	
..2	AA67-00125B	SCREEN-FRESNEL;65W,-,T2,1468*864,-,-,-,-	
..2	AA65-00016A	CLAMPER CORE-CABLE;PJTV,NYLON,NTR,6/6	S.N.A
..2	AA63-60131A	SPACER-FELT;SVP403J,FELT,-,-,-,BLK,T0.5,	S.N.A
..2	AA61-00972D	HOLDER-SCREEN,R;65W3,ABS HB,BLK	S.N.A
..2	AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,-,-,-,-	S.N.A

ASSY COVER REAR

Loc. No.	Code No.	Description ; Specification	Remark
1 *	BP90-00002A	ASSY COVER REAR;65W3,HCM653WX/XAA	S.N.A
..2	AA64-01395G	INLAY-TERMINAL;J7,J8,PS SHEET,T0.5,-,-,B	S.N.A
..2	AA64-02074B	INLAY-SPEAKER;J7,J8,J9,PS SHEET,T0.5,-,-	S.N.A
..2	AA64-02596A	CABINET BACK-BOT;55W3,HIPS V0,BLK	
..2	AA64-60421C	INLAY-COVER;-,PS,T0.3,-,-,BLK,SEA	S.N.A

ASSY LABEL

Loc. No.	Code No.	Description ; Specification	Remark
1 *	AA92-05473A	ASSY LABEL;HCM653WX/XAC,P54A	S.N.A

ASSY BOX

Loc. No.	Code No.	Description ; Specification	Remark
1 *	BP92-00003B	ASSY BOX;65W3,HCM653WX/XAC	S.N.A

ASSY P/MATERIAL

Loc. No.	Code No.	Description ; Specification	Remark
1 *	BP92-00002B	ASSY P/MATERIAL;65W3,SP65W3HFX/BWT	S.N.A
..2	AA61-20285A	HOLDER-BOX;3456,PP,-,-,-,WHT,VO	S.N.A

ASSY ACCESSORY

Loc. No.	Code No.	Description ; Specification	Remark
1 *	AA92-03258D	ASSY ACCESSORY;HCL473WX/XAC	S.N.A
..2	AA68-01509D	MANUAL USERS;HCM5525/553/653,ENG,W/P100G	
..2	AA68-01851C	MANUAL USERS;553W,653W,FRE,W/P100G,P54A,	
..2	AA39-00006A	CABLE RCA;,3000MM	
..2	AA59-00176A	REMOCON;-,TM63,SHARK,51,L/GRAY,DO,-,-,-,	
...3	2802-000194	RESONATOR-CERAMIC;8MHz,1.0%,TP,8.5x4.5x5	
...3	AA09-00275A	IC MICOM;Z86L8808SSC-R51PX,SOP,ST,SZTM-8	
..2	AA61-20126A	HOLDER-LEG;-,ABS,-,-,-,BLK,HB	

7-3 HCM553WX/XAA

ASSY CHASSIS

Loc. No.	Code No.	Description ; Specification	Remark
1 *	AA91-04006A	ASSY CHASSIS;HCM5525W3S/XAA,P54A	S.N.A
..2	AA94-11166F	ASSY PCB MISC-CRT;DP,PCL545R,P54A	
...3 CN501	3711-003051	CONNECTOR-HEADER;BOX,8P,1R,2.5MM,STRAIGH	
...3 CN502	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3 CN502B	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3 CN503	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3 CN503B	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3 CNW401	AA39-20027B	LEAD CONNECTOR-ASSY;,6P,67096-006,S,400,	
...3 CNW501	AA39-00127C	LEAD CONNECTOR-ASSY;,8P,35155-0800,S,500	
...3 CNW502	AA39-00112A	LEAD CONNECTOR-ASSY;,10P,35155-1000,S,30	
...3 CNW503	AA39-00112A	LEAD CONNECTOR-ASSY;,10P,35155-1000,S,30	
...3 FOCUS-	AA39-20115D	LEAD CONNECTOR-ASSY;P54A/SVP-55W3HD,UL32	
...3 FOCUS-	AA39-20115A	LEAD CONNECTOR-ASSY;,1P,BUSHING,500,3239	
...3 FOCUS-	AA39-20115D	LEAD CONNECTOR-ASSY;P54A/SVP-55W3HD,UL32	
...3 GBW-GN	AA39-00047E	LEAD CONNECTOR-ASSY;,1P,JUMPER,BLK,300MM	
...3 GBW-SC	AA39-00049A	LEAD CONNECTOR-ASSY;,1P,JUMPER,RED,300MM	
...3 GNDWIR	AA39-00198C	LEAD CONNECTOR-ASSY;P54A/SVP-55W3HD,UL16	
...3 GRW-GN	AA39-00047E	LEAD CONNECTOR-ASSY;,1P,JUMPER,BLK,300MM	
...3 GRW-SC	AA39-00049A	LEAD CONNECTOR-ASSY;,1P,JUMPER,RED,300MM	
...3 IC501	AA96-50151B	ASSY H/S;-,AMP,AA61-10060A,TDA6111Q,-	S.N.A
...3 IC531	AA96-50151B	ASSY H/S;-,AMP,AA61-10060A,TDA6111Q,-	S.N.A
...3 IC561	AA96-50151B	ASSY H/S;-,AMP,AA61-10060A,TDA6111Q,-	S.N.A
....4	1201-001131	IC-VIDEO AMP;6111,SIP,9P,-,SINGLE,-,PLAS	
....4	6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH1	S.N.A
....4	6021-000222	NUT-HEXAGON;2C,M3,ZPC(YEL),SM20C,-	S.N.A
....4	AA61-10060A	BRACKET-TR;W3220,CUS-1 1/2H,T0.5,-,-,-,-	S.N.A
...3 SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3 SG532	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3 SG562	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3 V501	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 V531	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 V561	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 VR501	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3 VR531	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3 VR561	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	AA97-05331A	ASSY AUTO-SUB;DP,PCL545R,P54A,U.S.A,54	S.N.A
....4 C502	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C503	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C504	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
....4 C505	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C506	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C507	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C510	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C511	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
....4 C512	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
....4 C513	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
....4 C514	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
....4 C532	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C533	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C534	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
....4 C535	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C536	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C537	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C540	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C541	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
....4 C542	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
....4 C543	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
....4 C562	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C563	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C564	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
....4 C565	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C566	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C567	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C570	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C571	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
....4 C572	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
....4 C573	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
....4 CN401	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
....4 D501	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D502	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D503	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 D504	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D509	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D510	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D531	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D532	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D533	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 D561	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D562	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D563	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 DZ501	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ502	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ503	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 DZ531	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ532	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ533	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 DZ561	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ562	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ563	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 EL503	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
....4 EL504	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
....4 EL505	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
....4 EL533	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
....4 EL534	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
....4 EL535	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
....4 EL563	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
....4 EL564	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
....4 EL565	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
....4 GT501	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT502	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT503	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT504	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT531	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT532	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT533	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT534	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT561	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT562	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT563	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT564	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT565	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT566	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 L501	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L531	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L561	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 PCB	AA41-00406B	PCB-CRT;PCL545R,FR-1,1L,B,1.6T,245X245,P	S.N.A
....4 Q501	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 Q502	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q504	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q531	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 Q533	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q561	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 Q563	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 R500	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R502	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R503	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R504	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R505	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R506	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R507	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R508	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R509	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R510	2001-001000	R-CARBON;82KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R511	2001-000313	R-CARBON;11KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R513	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 R514	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R516	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R517	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R518	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R519	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R520	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R521	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R522	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R523	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R524	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R526	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R527	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R528	2001-001015	R-CARBON;9.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R529	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R532	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R533	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R536	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R537	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R538	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R540	2001-000837	R-CARBON;51KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R541	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R543	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 R544	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R545	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R546	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R547	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R548	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R549	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R550	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R551	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R552	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R553	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R554	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R555	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R556	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R557	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R559	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 R562	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R563	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R564	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R566	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R567	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R568	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R569	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R570	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R571	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R572	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R573	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 R574	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R575	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R576	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R577	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R578	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R579	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R580	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R581	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R582	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R583	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R584	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R589	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 SG351	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG501	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG503	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG533	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG561	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG563	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
..2	AA94-08486A	ASSY PCB MISC-CONTROL;HCM553W3S/XAA,P54A	
...3 CNW01	AA39-00223A	LEAD CONNECTOR-ASSY;,11P,67096-011,35155	
...3 CNY01	3711-003353	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,ANGLE,	
...3 CNY02	3711-000447	CONNECTOR-HEADER;3WALL,3P,1R,2.5mm,ANGLE	
...3 CNYW02	AA39-00259A	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,3P	
...3 LEDY01	0601-001381	LED;ROUND,RED/GRN,5.0MM,650/563NM	
...3 RMY01	AA32-00012A	MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES	
...3 SWY01	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY02	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY03	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY04	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY05	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY06	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY07	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY08	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	AA97-05321A	ASSY AUTO-SUB;SVP-47W3HR,P54A	S.N.A
....4 CY01	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 DZY02	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4 DZY03	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4 PCB	AA41-00518A	PCB-CONTROL;SVP-47W3HR,FR-1,1L,A,1.6T,24	S.N.A
....4 QY01	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
....4 RY02	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RY03	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY04	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY05	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY06	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY07	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 RY08	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RY09	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
..2	AA94-08485A	ASSY PCB MISC-A/V FRONT;HCM553W3S/XAA,P5	
...3 CNY01A	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
...3 CNY702	3711-000447	CONNECTOR-HEADER;3WALL,3P,1R,2.5mm,ANGLE	
...3 CNYW01	AA39-00257A	LEAD CONNECTOR-ASSY;,12P,67096-012,S,120	
...3 CNYW02	AA39-00260A	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,3P	
...3 JK101	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
...3 JK102	3722-001164	JACK-PIN;3P,3.4mm,SN,WH:YE:RE,#16-22	
...3 SW101	3404-000208	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	AA91-00762D	ASSY-JACK,SIDE;,P54A PAL XAA,W3	
....4	AA61-00793C	HOLDER-JACK;W3,ABS HB,BLK,DG703P	S.N.A
....4	AA64-02085D	DOOR-AV;W3,ABS HB,BLK,DG703P	
....4	AA64-02086E	INLAY-AV;W3,PS SHEET,T0.5,P55A	S.N.A
...3	AA97-07147A	ASSY AUTO-A/V FRONT;HCL473WX/XAA,P54A,AA	S.N.A
....4 PCB	AA41-00499A	PCB-FRONT A/V;SVP-54T6SR,FR-1,1L,A,1.6T,	S.N.A
....4 RK101	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
..2	AA94-08487A	ASSY PCB MISC-SUB AMP;HCM553W3S/XAA,P54A	
...3 CNSW60	AA39-20020D	LEAD CONNECTOR-ASSY;,5P,67096-005,S,600,	
...3 CNSW60	BP39-00006A	LEAD CONNECTOR-ASSY;P54A/SVP-42W5HD,UL10	
...3 CS603	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
...3 ICS601	AA96-50367A	ASSY H/S;-,-,AA62-30181D,TDA7265,-	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30181D	HEAT SINK-ES;-,AL6063 EXTR.,2,WHT,70MM,-	S.N.A
...3	AA97-05521A	ASSY AUTO-SUB;SVP-47W3HR,P54A,KOREA	S.N.A
....4 CNS602	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
....4 CNS603	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CNS604	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
....4 CS602	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 CS605	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
....4 CS606	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
....4 CS608	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 CS611	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 CS612	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 CS614	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
....4 DS601	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 EL01	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
....4 EL02	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
....4 EL03	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
....4 EL04	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
....4 LS601	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 PCB	AA41-00459A	PCB-SUB AMP;SP43T6HF,FR-1,1L,A,1.6T,245X	S.N.A
....4 QS602	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 RS603	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS605	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RS606	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS607	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS611	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 RS612	2001-001050	R-CARBON(S);1.5KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS614	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS616	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS618	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 RS619	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS621	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS622	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS623	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	

Loc. No.	Code No.	Description ; Specification	Remark
....4 RS626	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
..2	AA95-01853F	ASSY SUB-PCB,V/M;DP,PCL545R,P54A,AA95-00	S.N.A
...3 CNZ101	AA39-20055E	LEAD CONNECTOR-ASSY;,6P,YBNH025-06,67096	
...3 QZ101	AA96-50162F	ASSY H/S;-,POWER,AA62-30013E,2SA1011,30M	S.N.A
....4	0502-000131	TR-POWER;2SA1011-D,PNP,1.2W,TO-220,-,60	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30013E	HEAT SINK-ES;-,A6063 EXTR,-,-,30(21) T02	S.N.A
...3 QZ102	AA96-50162G	ASSY H/S;-,AMP,AA62-30013E,2SC2344,30MM	S.N.A
....4	0502-000153	TR-POWER;2SC2344-D,NPN,1.2W,TO-220,-,60	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30013E	HEAT SINK-ES;-,A6063 EXTR,-,-,30(21) T02	S.N.A
...3 RZ120	2008-001097	R-FUSIBLE(S);33OHM,5%,1/2W,AC,BK,2.5X6.5	
...3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
...3	AA97-05192A	ASSY AUTO-SUB;DP,PCL545R,P54A	S.N.A
....4 CNZ102	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CNZ103	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CNZ104	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CZ101	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 CZ102	2401-001157	C-AL;33uF,20%,160V,GP,TP,12.5x20,5	
....4 CZ103	2201-000516	C-CERAMIC,DISC;4.7nF,+100-0%,500V,Y5U,TP	
....4 CZ104	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
....4 CZ105	2201-000516	C-CERAMIC,DISC;4.7nF,+100-0%,500V,Y5U,TP	
....4 CZ106	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
....4 CZ107	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
....4 CZ108	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
....4 CZ109	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
....4 CZ110	2201-000604	C-CERAMIC,DISC;0.056nF,+100-0%,500V,SL,T	
....4 CZ111	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 CZ112	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
....4 DZ101	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DZ102	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DZ103	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DZ104	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DZ105	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DZ106	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 LZ101	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
....4 PCB	AA41-00344A	PCB-VM;PCL545R,FR-1,1L,A,1.6T,245X245,P5	S.N.A
....4 QZ103	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 QZ104	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QZ105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QZ106	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 RFZ101	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
....4 RZ101	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ102	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ103	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4 RZ104	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ105	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ106	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ107	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ108	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ109	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ110	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ111	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4 RZ112	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4 RZ113	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4 RZ114	2003-000532	R-METAL OXIDE(S);18ohm,5%,2W,AF,TP,4x12m	
....4 RZ115	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ116	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ117	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ118	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ119	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ121	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ122	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 RZ123	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	AA33-00011A	MAGNET CONVERGENCE;JH92LTU-36C,29.1MM,0.	
..2	AA95-01849U	ASSY SUB-PCB,TERMINAL;DP,HCL552W,P54AAA9	S.N.A
...3 CNT01	3711-003630	CONNECTOR-HEADER;BOX,32P,2R,2.54mm,ANGLE	
...3 CNT02	3711-003630	CONNECTOR-HEADER;BOX,32P,2R,2.54mm,ANGLE	
...3 CNY01	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
...3 CNY02	AA39-20052D	LEAD CONNECTOR-ASSY;,4P,YBNH025-04,YSH02	
...3 IC703	0904-001121	IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,30	
...3 IC705	0801-000213	IC-CMOS LOGIC;4052,MULTIPLEXER,DIP,16P,3	
...3 ICD01	1204-001510	IC-SEPARATOR;EL4583CN,DIP,16P,-,PLASTIC,	
...3 ICD02	0801-000284	IC-CMOS LOGIC;4528,MULTIVIBRATOR,DIP,16P	
...3 ICD03	1204-001510	IC-SEPARATOR;EL4583CN,DIP,16P,-,PLASTIC,	
...3 JKV02	3722-001039	JACK-PIN;9P,3.4mm,SN,BLK,#16-22	
...3 JKV03	3722-001382	JACK-PIN;5P(9P),3.4MM,NI,R/W/G/BLUE,-	
...3 JKV04	3722-001626	JACK-PIN;8P/9P,3.4MM,NI,BLK,-	
...3 JKV08	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
...3 RD18	2001-000954	R-CARBON;750KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	AA97-05196A	ASSY AUTO-SUB;DP,HCL552W,P54A,AA95-00715	
....4 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 C716	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 C730	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
....4 C731	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
....4 C738	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 C740	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 C760	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C761	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C762	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C763	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C764	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C765	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C766	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C767	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C780	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 CD01	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
....4 CD03	2401-003728	C-AL;10UF,°æ20%,16V,BP,TP,5X7MM,5	
....4 CD06	2401-003728	C-AL;10UF,°æ20%,16V,BP,TP,5X7MM,5	
....4 CD11	2401-003728	C-AL;10UF,°æ20%,16V,BP,TP,5X7MM,5	
....4 CD12	2401-003728	C-AL;10UF,°æ20%,16V,BP,TP,5X7MM,5	
....4 CD16	2401-003728	C-AL;10UF,°æ20%,16V,BP,TP,5X7MM,5	
....4 CD17	2401-003728	C-AL;10UF,°æ20%,16V,BP,TP,5X7MM,5	
....4 L701	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L702	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L711	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L720	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L721	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L722	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L723	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L724	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L725	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L726	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 LD01	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 LD02	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 LD04	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 RN701	2011-000160	R-NETWORK;10Kohm,5%,1/8W,A,SIP,9P,TP	
....4	AA97-06156A	ASSY SMD-SUB;DP,HCL552W,P54A,AA95-00715C	
.....5 C702	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C704	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
.....5 C705	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
.....5 C706	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C707	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C708	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C709	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C710	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C711	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C712	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C713	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C714	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C715	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C717	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C718	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C719	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C720	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C721	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C722	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C723	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C724	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C727	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C732	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C733	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C734	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C735	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C736	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C737	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C739	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C741	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C768	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C769	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 CD02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD05	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
.....5 CD07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD09	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 CD10	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 CD13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD15	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD18	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
.....5 IC701	1001-001030	IC-VIDEO SWITCH;TDA6920X,-,SOP,28P,300MI	
.....5 IC702	1001-001030	IC-VIDEO SWITCH;TDA6920X,-,SOP,28P,300MI	
.....5 PCB	AA41-00343A	PCB-TERMINAL;PCL545R,FR-4,2L,A,1.6T,180X	S.N.A
.....5 Q701	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q702	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q703	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q704	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q705	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q706	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q707	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q711	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q712	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q714	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 QD01	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 QD02	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 QD03	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 QD04	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 R701	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R702	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R703	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R704	2007-001157	R-CHIP;750ohm,5%,1/16W,DA,TP,1608	
.....5 R705	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R706	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R707	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R708	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R709	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R710	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R712	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R713	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R714	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R715	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R716	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R717	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R718	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R719	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R720	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R721	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R722	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R723	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R724	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R725	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R726	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R727	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R728	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R729	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R734	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.....5 R735	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.....5 R740	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R741	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R742	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R743	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R744	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R745	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R748	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R749	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R750	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R751	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R752	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R753	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
.....5 R754	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
.....5 R755	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R756	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R757	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R758	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R759	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R760	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R761	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
.....5 R762	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R763	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R764	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
.....5 R765	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R766	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R767	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R768	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R769	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R774	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R775	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R776	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R777	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R779	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R780	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R788	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R791	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R792	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R793	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R794	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R795	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R796	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R797	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R820	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R821	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R829	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R830	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 RD01	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 RD02	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 RD03	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
.....5 RD04	2007-000096	R-CHIP;30Kohm,5%,1/16W,DA,TP,1608	
.....5 RD05	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 RD06	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 RD07	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
.....5 RD08	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 RD09	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
.....5 RD11	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
.....5 RD12	2007-000913	R-CHIP;43Kohm,5%,1/16W,DA,TP,1608	
.....5 RD13	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 RD14	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
.....5 RD15	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
.....5 RD16	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 RD17	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 RD19	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 RD20	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 RD21	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 RP784	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 RY701	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 RY702	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 RY703	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
..2	AA95-01841C	ASSY SUB-PCB,SENSOR;DP,PCL545R,P54A,AA95	
...3 CN01	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
...3 D01	0603-001067	PHOTO DIODE;-,10V,560nm,BK	
...3	AA97-05353A	ASSY AUTO-SUB;DP,PCL545R,P54A	S.N.A
....4 PCB	AA41-00433B	PCB-SENSOR;PCL545R,CEM-1,1L,A,1.6T,245X2	S.N.A
....4 Q01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 R01	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R02	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R03	2001-000454	R-CARBON;2.2MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
..2	AA91-04033A	ASSY MISC-CHASSIS PACK;HCM553W3S/XAA,P54	
...3	AA98-01429A	ASSY K/D;SP55W3HFS/XET	
....4 PM+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
....4 PP+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
....4 PS+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA61-00504B	HOLDER-CHASSIS;43,54,62J8,ABS,-,-,-,GRAY	S.N.A
...3	AA95-01846D	ASSY SUB-PCB,SUB;PCL545R,P54A,AA95-00705	
....4 C432	2306-000267	C-FILM,MPPF;8.2nF,5%,1.6KV,TP,28.5x18.5x	
....4 C438	2306-000267	C-FILM,MPPF;8.2nF,5%,1.6KV,TP,28.5x18.5x	
....4 C491	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
....4 C876	2401-000787	C-AL;220uF,20%,160V,GP,TP,16x31.5mm	
....4 CN202	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
....4 CN801	AA39-00180A	LEAD CONNECTOR-ASSY;,14P,YBNH250-14,3515	

Loc. No.	Code No.	Description ; Specification	Remark
....4 CN802	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
....4 CN803	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
....4 CNW801	AA39-20061G	LEAD CONNECTOR-ASSY;,3P,YFH800-03,S,100M	
....4 CNZ02	AA39-00115A	LEAD CONNECTOR-ASSY;,10P,YBNH250-10,3515	
⚠ 4 CR430S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
⚠ 4 CR431S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
⚠ 4 CR436S	2306-000235	C-FILM,MPPF;560nF,5%,400V,TP,26*22.5*14,	
⚠ 4 CR471S	2301-001091	C-FILM,MPPF;470nF,5%,400V,TP,26x21.5x14.	
⚠ 4 CR473S	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
⚠ 4 CR474S	2306-000326	C-FILM,MPPF;4.7nF,5%,1.6KV,TP,28.5x16x9m	
....4 CS803	2401-003370	C-AL;47uF,20%,450V,GP,BK,16X35.5,7.	
⚠ 4 CY811S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
⚠ 4 CY812S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
....4 D464	0402-000562	DIODE-RECTIFIER;UF5406,600V,3A,DO-201AD,	
⚠ 4 D811S	0402-000102	DIODE-BRIDGE;D2SB60,600V,1.5A,-	
....4 IC301	AA96-50406A	ASSY H/S;-,-,AA62-30180K,LA7845,-	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5	1204-000517	IC-VERTICAL DEF.;LA7845,SIP,7P,-,PLASTIC	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30180K	HEAT SINK-ES;-,A6063 EXTR,-,WHT,50/13,-,	S.N.A
⚠ 4 IC421	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
⚠ 4 IC430	1203-000162	IC-POSI.ADJUST REG.;317,TO-220,3P,-,PLAS	
⚠ 4 IC431	1201-000191	IC-OP AMP;4558,DIP,8P,300MIL,DUAL,20V/mV	
⚠ 4 IC471	1203-000610	IC-PWM CONTROLLER;494,DIP,16P,300MIL,PLA	
....4 ICS801	AA13-00024A	IC HYBRID;-,TNY253P,-,8PIN,-,-	
....4 ICS807	AA96-00111P	ASSY H/S;-,MAIN,AA62-30013L,KA278RA05,FA	S.N.A
.....5	1203-001978	IC-VOLTAGE REGULATOR;KA278RA05,TO-220F,4	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30013L	HEAT SINK-ES;-,-,-,-,44/22,-,WHT,-,-,-,-	S.N.A
....4 ICZ103	AA96-00891A	ASSY H/S;-,CONVERGENCE,AA62-30173L,STK39	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5	1201-001225	IC-VIDEO AMP;392,SIP,22P,-,TRIPLE,-,PLAS	
.....5	6003-001021	SCREW-TAPTITE;RH,+,B,M3,L15,ZPC(YEL),SWR	S.N.A
.....5	AA62-30173L	HEAT SINK;PJT,A6063,T2.0,H130,CG MODULE	S.N.A
....4 ICZ104	AA96-00891A	ASSY H/S;-,CONVERGENCE,AA62-30173L,STK39	S.N.A
....4 L432	AA27-00095A	COIL HORIZ. WIDTH;-,600uH,YL9N 15x27.5 C	
....4 L434	AA27-00221A	COIL HORIZ. WIDTH;600UH,600UH,SB5S OS6X2	
....4 L435	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
....4 L854	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
....4 L860	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
....4 L862	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
....4 L872	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
....4 L874	AA27-10002L	COIL CHOKE;-,24uH,K,-,2A,-,24UH-K,10x10m	
⚠ 4 LC431S	AA27-30003M	COIL LINEARITY;-,5uH,OWA14x15,USRC0.1x60	
⚠ 4 PC811S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
....4 Q353	0502-000442	TR-POWER;2SC4636RB,NPN,2W,TO-220,ST,10-	
....4 Q431	AA96-00033E	ASSY H/S;-,H-OUT,AA62-30173C,2SC5446, FM	S.N.A
.....5	AA62-30173C	HEAT SINK-ES;-,-,T1.0,WHITE,SCREW-HOLE(2	S.N.A
.....5	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	S.N.A
.....5	AA02-00007A	SUB ETC-MICA;DPM-04,MICA,22x29x0.15mm	S.N.A
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	0502-001175	TR-POWER;2SC5446,NPN,200000mW,TO-3PL,BK,	
.....5	0402-001296	DIODE-RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 Q433	AA96-50407A	ASSY H/S;-,-,AA62-30154G,KSD73Y,-	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5	0502-000298	TR-POWER;KSD73,NPN,30000mW,TO-220,TP,120	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30154G	HEAT SINK-ES;-,A6063 EXTR,-,WHT,50/16,-,	S.N.A
....4 Q441	AA96-50383F	ASSY H/S;-,-,AA62-30180D,2SD921,-	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5	0502-001104	TR-POWER;2SD921,NPN,80W,TO-3P,BK,700-	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30180D	HEAT SINK-ES;-,A6063 EXTR.,2,WHT,50mm,-,	S.N.A
....4 Q473	AA96-00037A	ASSY H/S;-,-,AA62-30181N,2SC4125, IRFS64	S.N.A
.....5	AA62-30181N	HEAT SINK-ES;-,-,T1.0,WHITE,SCREW-HOLE(2	S.N.A
.....5	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	S.N.A
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	0505-001202	FET-SILICON;IRFS640A,N,200V,9.8A,0.18ohm	
.....5	0502-001100	TR-POWER;2SC4125,NPN,70W,TO-3PML,BK,8-	
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
⚠ 4 RL811S	3501-001053	RELAY-POWER;5Vdc,530mW,10A,1FormA,15mS,5	
⚠ 4 RL812S	3501-001040	RELAY-POWER;12VDC,500mW,10A,1FormA,15mS,	
⚠ 4 T431	AA26-50001U	TRANS-HORIZ.DRIVE;-,-,-,28mH,-,-,105uH,-	
⚠ 4 T432	AA26-00012A	TRANS-DUMMY;-,-,-,-,-,-,-,-,-,-,-,-,-,EER4	
⚠ 4 T433	AA26-00011A	TRANS-DUMMY;-,-,-,-,-,-,-,-,-,-,-,-,-,EE28	
⚠ 4 T444S	AA26-00100A	TRANS FBT;FFA97513L,CT29A7DR,0.3mH,-,-,-	
⚠ 4 T461	AA26-50001V	TRANS-HORIZ.DRIVE;-,-,-,6.0mH,-,-,113uH,	
⚠ 4 T481	AA26-00091A	TRANS-HV-STORAGE;4mH,-,14P,830uH,180V,10	
⚠ 4 TS811S	AA26-00055B	TRANS SWITCHING;,HLK436W,AC80V,AC80~280V	
....4	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
....4	AA97-05175A	ASSY AUTO-SUB;PCL545R,P54A	
.....5 C301	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
.....5 C302	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
.....5 C303	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
.....5 C304	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
.....5 C305	2201-002022	C-CERAMIC,DISC;0.005nF,0.25pF,500V,NP0,T	
.....5 C307	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
.....5 C308	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
.....5 C309	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
.....5 C311	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
.....5 C351	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
.....5 C352	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C353	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C354	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
.....5 C355	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
.....5 C405	2201-000558	C-CERAMIC,DISC;0.47nF,10%,50V,Y5P,TP,5x3	
.....5 C406	2201-000370	C-CERAMIC,DISC;0.22nF,10%,50V,Y5P,TP,4x3	
.....5 C412	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C413	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
.....5 C417	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
.....5 C418	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
.....5 C419	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
.....5 C426	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
.....5 C427	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
.....5 C428	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
.....5 C429	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
.....5 C437	2401-003114	C-AL;4.7uF,20%,250V,WT,TP,10x16,5	
.....5 C445	2401-001622	C-AL;6.8uF,20%,50V,BP,TP,16x25mm,7.	
.....5 C449	2201-000406	C-CERAMIC,DISC;0.27nF,10%,2kV,Y5P,TP,6.3	
.....5 C450	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
.....5 C451	2401-001160	C-AL;33uF,20%,160V,GP,-,16x35mm,7.5	
.....5 C452	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
.....5 C453	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
.....5 C454	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
.....5 C455	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
.....5 C456	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
.....5 C457	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
.....5 C458	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
.....5 C459	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
.....5 C460	2303-000331	C-FILM,PPF;4.7nF,5%,630V,TP,19.5x12x7,7.	
.....5 C467	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
.....5 C468	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C469	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
.....5 C472	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
.....5 C476	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C477	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
.....5 C478	2301-000020	C-FILM,PEF;27nF,5%,100V,TP,7.3x4x12.5mm,	
.....5 C479	2301-000200	C-FILM,PEF;2.2nF,5%,200V,TP,11.0x6.0x9.0	
.....5 C480	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
.....5 C481	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
.....5 C483	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
.....5 C484	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
.....5 C487	2305-000178	C-FILM,MPEF;10nF,5%,100V,TP,-,5mm	
.....5 C488	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 C489	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C490	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C492	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
.....5 C857	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
.....5 C866	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
.....5 C869	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
.....5 C873	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
.....5 CN401	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
.....5 CN403	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
⚠ 5 CR401S	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
⚠ 5 CR402S	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,	
⚠ 5 CR403S	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,	
.....5 CS804	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 CS805	2401-001101	C-AL;330uF,20%,16V,GP,TP,8x11.5,5	
.....5 CS807	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 CS808	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 CS809	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
.....5 CS812	2201-002076	C-CERAMIC,DISC;0.068nF,5%,1kV,SL,TP,8x4m	
.....5 CS813	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 CS814	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
.....5 CZ101	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
.....5 CZ102	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
.....5 CZ108	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
.....5 CZ109	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
.....5 CZ110	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
.....5 CZ111	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
.....5 CZ112	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
.....5 CZ113	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
.....5 CZ114	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
.....5 CZ115	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
.....5 CZ116	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
.....5 CZ117	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
.....5 CZ118	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
.....5 CZ126	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
.....5 CZ127	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
.....5 CZ128	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
.....5 CZ132	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
.....5 CZ133	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
.....5 CZ134	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
.....5 CZ135	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
.....5 CZ136	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
.....5 CZ137	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
.....5 CZ138	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
.....5 CZ139	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
.....5 CZ140	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 CZ141	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 CZ151	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
.....5 CZ152	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
.....5 CZ153	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
.....5 CZ154	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
.....5 CZ155	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
.....5 CZ156	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
.....5 D302	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 D353	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D384	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 D385	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D433	0402-000537	DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
.....5 D434	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 D435	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 D436	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D440	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
.....5 D441	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
.....5 D442	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D443	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D444	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 D445	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
.....5 D451	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
.....5 D453	0402-001286	DIODE-RECTIFIER;RP1H,2000V,.1A,-,TP	
.....5 D472	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 D474	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 D477	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D478	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D479	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D480	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 D484	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 D501	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 5 DR401S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 5 DR402S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 5 DR404S	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
.....5 DS805	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
.....5 DS807	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 DS809	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
.....5 DZ301	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
.....5 DZ304	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
.....5 DZ305	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
.....5 DZ306	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500mW,D	
.....5 DZ307	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
.....5 DZ386	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO	
.....5 DZ395	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
.....5 DZ400	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
.....5 DZ413	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
.....5 DZ473	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
.....5 DZ474	0403-000734	DIODE-ZENER;TZP15B,15V,14.7-16.5V,1W,DO-	
.....5 DZ481	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
⚠ 5 DZ482S	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
.....5 DZ483	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 DZ801	0406-001106	DIODE-TVS;P6KE300A,285/-/315V,600W,DO-20	
.....5 DZ802	0406-001106	DIODE-TVS;P6KE300A,285/-/315V,600W,DO-20	
.....5 DZ803	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
.....5 DZ804	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m	
.....5 DZ805	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
.....5 EL01	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EY101	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY102	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY103	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY104	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY105	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY107	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY108	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY109	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY110	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY111	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY112	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY113	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY114	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY115	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY116	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY117	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY118	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY120	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY121	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY122	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY123	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY124	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY125	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY126	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY127	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY128	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY129	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY130	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY131	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY132	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY133	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY134	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY136	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY137	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY138	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY139	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY140	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY141	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY142	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY143	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY144	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY145	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY146	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY147	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY148	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY149	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY150	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY151	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY152	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY153	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY154	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY155	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY156	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY157	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY158	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY159	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY160	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY161	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY162	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY163	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY164	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY165	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY166	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY167	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY168	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY171	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY172	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY173	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY174	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY175	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY176	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
.....5 EY177	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY178	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY179	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY180	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY181	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY182	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY183	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY184	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY185	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY186	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY187	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY188	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY189	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY190	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY191	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY192	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY193	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY194	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY195	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY196	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY197	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY198	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY199	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY200	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY201	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY202	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY203	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY204	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY205	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY206	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY207	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY208	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY209	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY210	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY211	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY212	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY213	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY214	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY215	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY216	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY217	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY218	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY219	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY220	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY221	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY222	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY223	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY224	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY225	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY226	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY227	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY228	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY229	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY230	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY231	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY232	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY233	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EYS01	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EYS02	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EYS03	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EYS04	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EYS05	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EYS06	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EYS07	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EYS08	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EYS09	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
⚠ 5 FD101S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
⚠ 5 FD102S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
.....5 GT01	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT02	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT03	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT04	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT05	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT06	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT07	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT08	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT09	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT10	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT11	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT12	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT16	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT17	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT18	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT19	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT21	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT22	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT23	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT24	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT25	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT26	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT27	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT28	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT29	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT30	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT31	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT32	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT33	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT34	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT35	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT37	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT403	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT404	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT405	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT812A	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT813A	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT814A	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
⚠ 5 ICR01S	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
.....5 L341	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
.....5 L480	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L481	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L482	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
.....5 L483	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
.....5 L493	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L494	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
.....5 L495	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L499	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 LS801	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 LS802	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 LZ107	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
.....5 LZ108	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
.....5 LZ109	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
.....5 LZ110	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
.....5 LZ111	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
.....5 LZ112	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
.....5 PCB	AA41-00340C	PCB-SUB;PCL545R,CEM-1,1L,C,1.6T,330X245,	S.N.A
.....5 Q301	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q350	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q351	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q352	0501-000366	TR-SMALL SIGNAL;KSC2330-Y,NPN,1W,TO-92L,	
.....5 Q381	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q382	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q401	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q402	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q421	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q422	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
.....5 Q432	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5 Q435	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
.....5 Q436	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q451	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q461	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q471	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q472	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
.....5 Q474	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q481	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q482	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
⚠ 5 QR401S	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5 QS801	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
.....5 R301	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
.....5 R302	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
.....5 R303	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5 R305	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5 R306	2003-002129	R-METAL OXIDE(S);3.9ohm,5%,2W,AF,TP,3.9x	
.....5 R307	2003-002129	R-METAL OXIDE(S);3.9ohm,5%,2W,AF,TP,3.9x	
.....5 R308	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R310	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
.....5 R312	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R313	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R314	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R332	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
.....5 R333	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
.....5 R334	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
.....5 R350	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R351	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R352	2001-000837	R-CARBON;51KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R353	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R354	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R355	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R356	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R357	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R358	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R359	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R360	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R361	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
.....5 R362	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
.....5 R363	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
.....5 R364	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
.....5 R365	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
.....5 R366	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
.....5 R384	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R385	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R386	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R387	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R388	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R389	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R397	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R405	2009-001109	R-TEMPERATURE;240ohm,5%,1/4W,AA,TP,2.3x6	
.....5 R406	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5 R407	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
.....5 R408	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
.....5 R409	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R410	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R411	2008-001113	R-FUSIBLE(S);0.22ohm,10%,2W,AG,TP,3.9x12	
.....5 R412	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R413	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R414	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R415	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R416	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R417	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R418	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R419	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R420	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R421	2003-002159	R-METAL OXIDE;150OHM,5%,1W,AG,TP,4.3X12M	
.....5 R422	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R423	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R424	2008-001022	R-FUSIBLE(S);10ohm,5%,1W,AF,TP,2.5x6.5mm	
.....5 R425	2003-000417	R-METAL OXIDE(S);1.2Kohm,5%,3W,AA,TP,6x1	
.....5 R426	2003-002153	R-METAL OXIDE;4.7OHM,5%,2W,AG,TP,6X16MM	
.....5 R427	2003-002279	R-METAL OXIDE(S);1.2OHM,5%,2W,AG,TP,5.6X	
.....5 R427A	2003-002279	R-METAL OXIDE(S);1.2OHM,5%,2W,AG,TP,5.6X	
.....5 R428	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
.....5 R428A	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
.....5 R429	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
.....5 R430	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
.....5 R432	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R433	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R434	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R435	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
.....5 R436	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R437	2008-001087	R-FUSIBLE(S);1.8ohm,5%,2W,AG,TP,3.9x12mm	
.....5 R438	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R439	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R440	2008-000282	R-FUSIBLE;0.47ohm,5%,1W,AA,TP,3.9x12mm	
.....5 R441	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R442	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R442A	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R443	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
.....5 R443A	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
.....5 R444	2003-000995	R-METAL OXIDE(S);3.3Kohm,5%,2W,AF,TP,3.9	
.....5 R445	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R446	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R447	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R448	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R449	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R454	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R455	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R456	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R458	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R459	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R460	2003-002044	R-METAL OXIDE(S);100ohm,5%,1W,AF,TP,2.5x	
.....5 R461	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R462	2008-001145	R-FUSIBLE;4.7OHM,5%,1/2W,AF,TP,2.5X6.5MM	
.....5 R463	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
.....5 R464	2003-002158	R-METAL OXIDE;0.68OHM,5%,1W,AG,TP,4.3X12	
.....5 R465	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R466	2004-001386	R-METAL(S);16.9Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5 R467	2004-001986	R-METAL(S);35.7Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5 R468	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R469	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R470	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R471	2004-002011	R-METAL(S);110Kohm,1%,1/2W,AA,TP,2.4x6.4	
.....5 R472	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
.....5 R473	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
.....5 R474	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R475	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R482	2001-001031	R-CARBON;91KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R483	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R484	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R485	2008-001137	R-FUSIBLE(S);3.3ohm,5%,1W,AF,TP,3.9x10mm	
.....5 R486	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
.....5 R487	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R488	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R489	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R490	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R491	2001-000745	R-CARBON;4.7OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R492	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R494	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R495	2001-000262	R-CARBON;1.8MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R501	2004-001376	R-METAL(S);11Kohm,1%,1/2W,AA,TP,2.4x6.4m	
.....5 R502	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
.....5 R856	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R857	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 RFS802	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP,3.9x10mm	
.....5 RFZ19	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
.....5 RFZ20	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
.....5 RFZ21	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
.....5 RFZ22	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
.....5 RFZ50	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
.....5 RFZ51	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
.....5 RFZ52	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
.....5 RFZ53	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
⚠ 5 RR401S	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 5 RR402S	2103-001086	VR-SEMI;100KOHM,25%,0.3W,TOP	
⚠ 5 RR403S	2004-004001	R-METAL(S);180Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 5 RR404S	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 5 RR405S	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 5 RR406S	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 5 RR407S	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
⚠ 5 RR408S	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
⚠ 5 RR409S	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
⚠ 5 RR410S	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
⚠ 5 RR471S	2103-001024	VR-SEMI;50Kohm,25%,0.3W,TOP	
.....5 RS801	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 RS803	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 RS804	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 RS805	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
.....5 RS806	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 RS807	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 RS808	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 RS809	2001-001099	R-CARBON(S);2.7KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 RZ104	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 RZ105	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 RZ106	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 RZ107	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 RZ108	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 RZ109	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 RZ110	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ111	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ112	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 RZ113	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ114	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ115	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ116	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ117	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ118	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ123	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5 RZ124	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5 RZ125	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5 RZ126	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5 RZ127	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5 RZ128	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5 RZ129	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5 RZ129A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5 RZ130	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5 RZ130A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5 RZ131	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5 RZ131A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5 RZ132	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5 RZ132A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5 RZ133	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ134	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ135	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ136	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ137	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ138	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ139	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ140	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ141	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RZ142	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5 RZ143	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5 RZ144	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5 RZ145	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5 RZ146	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5 RZ147	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5 RZ148	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5 RZ148A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5 RZ149	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5 RZ149A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
⚠ 5 VP811S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	AA94-08344A	ASSY PCB MAIN;HCM553W3S/XAA,P54A	
....4 C664	2401-001068	C-AL;3300uF,20%,50V,GP,BK,22x40,10	
....4 C665	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
....4 CG-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
....4 CG-TOP	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
....4 CN01	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
....4 CN02	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
....4 CNM01	3703-001187	CONNECTOR-DIN;64P,2R,FEMALE,STRAIGHT,AU	
....4 CNT01	3710-001208	CONNECTOR-SOCKET;32P,2R,2.54mm,STRAIGHT,	
....4 CNT02	3710-001208	CONNECTOR-SOCKET;32P,2R,2.54mm,STRAIGHT,	
....4 CNZ01	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
....4 DW-BOT	AA63-00395B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
....4 DW-TOP	AA63-00394B	SHIELD CASE-TOP;PRJT P54A,SPTE,T0.5,-,-,	S.N.A
....4 IC102	AA96-00110C	ASSY H/S;-,-,AA62-30013K,SI-3090C,-	S.N.A
.....5	1203-000577	IC-VOLTAGE REGULATOR;3090,ZIP,5P,-,PLAST	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30013K	HEAT SINK-ES;-,-,-,-,44/18,-,WHT,A6063 E	S.N.A
....4 IC104	AA96-00110A	ASSY H/S;-,-,AA62-30013K,SI-3050C,-	S.N.A
.....5	1203-000203	IC-POSI.ADJUST REG.;3050,TO-220,5P,-,PLA	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30013K	HEAT SINK-ES;-,-,-,-,44/18,-,WHT,A6063 E	S.N.A
....4 IC106	AA96-00110A	ASSY H/S;-,-,AA62-30013K,SI-3050C,-	S.N.A
....4 IC655	AA96-00038A	ASSY H/S;-,SOUND AMP,AA62-30173E,TDA7265	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30173E	HEAT SINK-ES;-,-,T1.0,WHITE,SCREW-HOLE(1	S.N.A
....4 ICZ101	AA96-50321B	ASSY H/S;-,-,AA62-30013G,SI3050C,-	S.N.A
.....5	1203-000203	IC-POSI.ADJUST REG.;3050,TO-220,5P,-,PLA	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30013G	HEAT SINK-ES;-,AL,-,WHT,55(18),-,-,-	S.N.A
....4 ICZ102	1203-000119	IC-NEGA.FIXED REG.;7905,TO-220,3P,-,PLAS	
....4 L601	AA29-00004A	FILTER LINE NOISE;-,20UH,3A,AC80-260V,TQ	
....4 L602	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
....4 MI-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
....4 MI-TOP	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
....4 SO-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
⚠ 4 TU103S	AA59-00164A	MODULE-RF,SPLITTER;-,UMX-NT-005,-,2IN/3O	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4	AA97-03130A	ASSY ROBOT-MAIN;HCL473WX/XAA,P54A,U.S.A	S.N.A
.....5 CN201	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
.....5 CN501	3711-003051	CONNECTOR-HEADER;BOX,8P,1R,2.5MM,STRAIGH	
.....5 CN801	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
.....5 CN901	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
.....5 CNZ02	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
.....5 IC103	AA96-50147B	ASSY H/S;-,TR,AA62-30012B,KA7808,-	S.N.A
......6	1203-000293	IC-POSI.FIXED REG.;7808,TO-220,3P,-,PLAS	
......6	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
......6	AA62-30012B	HEAT SINK-ES;-,A6063 EXTR,-,-,45(16) T02	S.N.A
.....5 IC107	AA96-00111L	ASSY H/S;-,-,AA62-30013L,KA78R12,-	S.N.A
......6	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
......6	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
......6	AA62-30013L	HEAT SINK-ES;-,-,-,-,44/22,-,WHT,-,-,-,-	S.N.A
⚠ 5 TU101S	AA40-00032A	TUNER-F/S;TCPN3081PC09A(S),NTSC,TR,181CH	
⚠ 5 TU102S	AA40-00032A	TUNER-F/S;TCPN3081PC09A(S),NTSC,TR,181CH	
.....5	AA97-04483A	ASSY AUTO-MAIN;HCL473WX/XAA,P54A,U.S.A	S.N.A
......6 C100	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
......6 C101	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
......6 C102	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
......6 C103	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
......6 C104	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
......6 C105	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
......6 C106	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
......6 C107	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
......6 C110	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
......6 C111	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
......6 C117	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C118	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C119	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
......6 C120	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
......6 C121	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
......6 C122	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
......6 C123	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C124	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C125	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C126	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
......6 C127	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C128	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C129	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
......6 C130	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
......6 C131	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
......6 C132	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
......6 C133	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C134	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C135	2401-003034	C-AL;220uF,20%,16V,WT,TP,8x11.5,5	
......6 C136	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
......6 C137	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
......6 C138	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
......6 C140	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C142	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
......6 C144	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
......6 C145	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
......6 C147	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
......6 C149	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
......6 C150	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
......6 C151	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
......6 C152	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
......6 C153	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C154	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C155	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C157	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
......6 C191	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
......6 C666	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C667	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
......6 C668	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
......6 C669	2401-000404	C-AL;10uF,20%,16V,BP,TP,5x11,5	
......6 C676	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
......6 C686	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
......6 C687	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
......6 C688	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
......6 C689	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C690	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C691	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	

Loc. No.	Code No.	Description ; Specification	Remark
......6 C701	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
......6 C801	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
......6 C901	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
......6 C902	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C903	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 CN101	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
......6 CN601	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
......6 CN602	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
......6 CN902	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
......6 CNY01	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
......6 CZ101	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
......6 CZ102	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
......6 CZ103	2401-000689	C-AL;2200uF,20%,16V,GP,TP,13x25,5	
......6 CZ105	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 CZ106	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 CZ107	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 CZ109	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
......6 CZ110	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
......6 D603	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 D604	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 D605	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 D606	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 D664	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
......6 D665	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 D701	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 D702	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 D703	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 DZ665	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
......6 DZ701	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
......6 DZ801	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
......6 EL01	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL02	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL03	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL05	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL06	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL07	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL08	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL09	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL10	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL11	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL12	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL13	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL14	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL15	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL16	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL17	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL18	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL19	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL20	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL21	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL22	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL23	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL24	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL25	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL26	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL27	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL28	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL29	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL30	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL31	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL32	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EY01	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY02	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY03	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY04	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY05	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY06	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY07	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY08	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY09	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY10	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY11	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY12	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY13	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY14	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 GTM02	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
......6 GTM04	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
......6 L100	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
......6 L101	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
......6 L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
......6 L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
......6 L104	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
......6 L105	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
......6 L107	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
......6 L108	2701-001007	INDUCTOR-AXIAL;24uH,10%,4.5x14mm	
......6 L110	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
......6 L111	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
......6 L112	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
......6 L113	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
......6 L603	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
......6 L604	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
......6 L605	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
......6 L901	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
......6 LDZ101	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
......6 LDZ102	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
......6 LZ101	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
......6 LZ102	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
......6 LZ103	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
......6 LZ104	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
......6 PCB	AA41-00332D	PCB-MAIN;PCL545R,FR-1,1L,D,1.6T,330X245,	S.N.A
......6 Q601	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 Q666	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 Q668	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 Q702	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 R102	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R103	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R104	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
......6 R105	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R106	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R107	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R110	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R111	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
......6 R112	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R113	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R115	2001-000869	R-CARBON;56OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R117	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R602	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R603	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
......6 R604	2001-001168	R-CARBON(S);6.8KOHM,5%,1/2W,AA,TP,2.4X6.	
......6 R605	2001-001106	R-CARBON(S);220KOHM,5%,1/2W,AA,TP,2.4X6.	
......6 R661	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
......6 R662	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
......6 R663	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R664	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
......6 R665	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
......6 R666	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
......6 R669	2001-001121	R-CARBON(S);3.6KOHM,5%,1/2W,AA,TP,2.4X6.	
......6 R670	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
......6 R671	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
......6 R672	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
......6 R673	2001-001086	R-CARBON(S);18KOHM,5%,1/2W,AA,TP,2.4X6.4	
......6 R673A	2001-001142	R-CARBON(S);3KOHM,5%,1/2W,AA,TP,2.4X6.4M	
......6 R681	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
......6 R682	2004-002019	R-METAL(S);33Kohm,1%,1/2W,AA,TP,2.5x6.5m	
......6 R683	2004-002019	R-METAL(S);33Kohm,1%,1/2W,AA,TP,2.5x6.5m	
......6 R685	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
......6 R686	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
......6 R687	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
......6 R689	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
......6 R690	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
......6 R691	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
......6 R701	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R702	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R703	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R704	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R888	2003-001098	R-METAL OXIDE(S);22Kohm,5%,3W,AA,TP,6x16	
......6 RF101	2008-001116	R-FUSIBLE(S);0.68ohm,10%,2W,AG,TP,3.9x12	
......6 RF104	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
......6 RF121	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
......6 RZ01	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
......6 RZ02	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RZ101	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RZ102	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
....4	BP95-00051A	ASSY SUB-SOUND;PCL545R,P54A,AA95-00712C	
.....5 CN601	3711-005105	CONNECTOR-HEADER;NOWALL,64P,2R,2.54MM,AN	
.....5 XD601	2801-000186	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,8pF,	
.....5	AA97-06988A	ASSY AUTO-SOUND;PCL545R,P54A,AA95-00712C	S.N.A
......6 CD601	2401-000444	C-AL;10uF,20%,25V,GP,TP,5x5mm,5mm	
......6 CD603	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
......6 CD604	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
......6 CD605	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
......6 CD607	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
......6 CD608	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
......6 CD609	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
......6 CD610	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
......6 CD611	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
......6 CD612	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
......6 CD614	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
......6 CD616	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
......6 CD621	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD622	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD623	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD624	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD625	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD626	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
......6 CD627	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD628	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD630	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
......6 CD632	2401-000444	C-AL;10uF,20%,25V,GP,TP,5x5mm,5mm	
......6 CD639	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
......6 CD641	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
......6 CD644	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD645	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD650	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
......6 CD652	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
......6 CD653	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD654	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD655	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
......6 CD656	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD657	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD660	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD661	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD663	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 LD601	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
......6 LD602	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
......6 LD603	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
......6	AA97-06895A	ASSY SMD-SOUND;PCL545R,P54A,AA95-00712C	S.N.A
.......7CD602	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD606	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD613	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD617	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.......7CD618	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.......7CD619	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.......7CD620	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.......7CD629	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.......7CD631	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD633	2203-000332	C-CERAMIC,CHIP;0.012nF,5%,50V,NP0,TP,160	
.......7CD634	2203-000332	C-CERAMIC,CHIP;0.012nF,5%,50V,NP0,TP,160	
.......7CD635	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
.......7CD636	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
.......7CD637	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
.......7CD638	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
.......7CD640	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD642	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7CD643	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7CD646	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7CD647	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7CD648	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.......7CD649	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.......7CD662	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD664	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.......7CD665	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.......7CD670	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
.......7CD678	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
.......7CD679	2203-000239	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,2012	
.......7ICD601	1204-001830	IC-SOUND PROCESSOR;MSP3452G-A2,QFP,80P,7	
.......7ICD602	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
.......7ICD603	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
.......7PCB	AA41-00335A	PCB-SOUND;PCL545R,FR-4,2L,A,1.6T,180X245	S.N.A
.......7QD601	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	

Loc. No.	Code No.	Description ; Specification	Remark
.......7QD602	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.......7RD601	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD602	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD603	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD604	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD605	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD606	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD607	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD608	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD609	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD610	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD611	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD612	2007-001010	R-CHIP;51Kohm,5%,1/16W,DA,TP,1608	
.......7RD613	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7RD614	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD615	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD616	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD617	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD618	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7RD619	2007-001179	R-CHIP;8.2Kohm,5%,1/16W,DA,TP,1608	
.......7RD620	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
.......7RD621	2007-001010	R-CHIP;51Kohm,5%,1/16W,DA,TP,1608	
.......7RD622	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
.......7RD623	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
.......7RD624	2007-001010	R-CHIP;51Kohm,5%,1/16W,DA,TP,1608	
.......7RD625	2007-001179	R-CHIP;8.2Kohm,5%,1/16W,DA,TP,1608	
.......7RD626	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
.......7RD627	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7RD628	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD629	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD630	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7RD631	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7RD632	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
.......7RD633	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
.......7RD634	2007-001179	R-CHIP;8.2Kohm,5%,1/16W,DA,TP,1608	
.......7RD635	2007-001179	R-CHIP;8.2Kohm,5%,1/16W,DA,TP,1608	
.......7RD636	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
.......7RD637	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
.......7RD638	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD639	2007-001010	R-CHIP;51Kohm,5%,1/16W,DA,TP,1608	
.......7RD647	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD648	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD649	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD650	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
.....5	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4	AA95-01824C	ASSY SUB-PCB,MICOM;PCL545R,P54A,AA95-007	
.....5 CN901	3703-001175	CONNECTOR-DIN;64P,2R,MALE,ANGLE,AU	
.....5 IC901	AA09-00260A	IC MICOM;SZM-422A2, ,52P,5V,12MHZ,W3-PRO	
.....5 IC902	1103-001213	IC-EEPROM;M24C16-WBN6,2048x8Bit,SDIP,8P,	
.....5 L903	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
.....5 X901	2801-003224	CRYSTAL-UNIT;32.768KHz,20ppm,28-AAY,12.5	
.....5	AA97-05187A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
......6 C901	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
......6 C904	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C905	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 C906	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C907	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
......6 C908	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
......6 C909	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
......6 C910	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
......6 C911	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
......6 C912	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C913	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
......6 C914	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
......6 C915	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C916	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
......6 C917	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 C918	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C919	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
......6 C920	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C925	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C926	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
......6 C927	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
......6 C928	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
......6 F901	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
......6 IC903	1203-001274	IC-VOL. DETECTOR;7545,TO-92,3P,-,PLASTIC	

Loc. No.	Code No.	Description ; Specification	Remark
......6 IC904	1203-000515	IC-VOL. DETECTOR;7042,TO-92,3P,177MIL,PL	
......6 L902	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
......6 L910	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
......6 L911	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
......6 L912	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
......6 L913	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
......6 Q901	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 Q902	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 Q903	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 Q909	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
......6 Q910	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 Q911	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6	AA97-06149A	ASSY SMD-SUB;PCL545R,P54A	S.N.A
.......7C902	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7C903	2203-000595	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,2012	
.......7C921	2203-000595	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,2012	
.......7D901	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7D902	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7D903	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7D904	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7D905	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7DZ903	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.......7DZ904	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.......7DZ905	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.......7DZ911	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
.......7DZ912	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
.......7DZ913	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
.......7DZ916	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.......7DZ917	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.......7DZ918	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.......7PCB	AA41-00338B	PCB-MICOM;PCL545R,FR-4,2L,B,1.6T,180X245	S.N.A
.......7R901	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7R902	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7R903	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7R904	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.......7R905	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7R907	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7R908	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7R911	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.......7R912	2007-000076	R-CHIP;330ohm,5%,1/16W,DA,TP,1608	
.......7R913	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7R914	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7R915	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7R916	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
.......7R917	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
.......7R918	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
.......7R919	2007-000458	R-CHIP;18Kohm,5%,1/16W,DA,TP,1608	
.......7R920	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7R921	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
.......7R922	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
.......7R923	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7R924	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7R925	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
.......7R926	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
.......7R927	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
.......7R928	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
.......7R929	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
.......7R930	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7R931	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7R932	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7R934	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7R935	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7R936	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7R937	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7R945	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	
.......7R946	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.......7R947	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.......7R948	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7R949	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	
.......7R950	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7R951	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	
.......7R958	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7R959	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7R960	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7R961	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7R962	2007-000098	R-CHIP;56Kohm,5%,1/16W,DA,TP,1608	
.......7R963	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	
.......7R964	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7R965	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7R967	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7R968	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7R969	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7R971	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
.......7R972	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.......7R973	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7R974	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7R976	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7R977	2007-000305	R-CHIP;10Mohm,5%,1/16W,DA,TP,1608	
.......7R978	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.......7R981	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
.......7R982	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
.......7R983	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
.....5	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
....4	AA39-20010F	LEAD CONNECTOR-ASSY;,1P,YFH800-01,S,700,	
....4	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
....4	AA95-01746A	ASSY SUB-PCB 3D COMB;WT-32Z5HD,K54A,AA95	
.....5 CON01	3711-002705	CONNECTOR-HEADER;NOWALL,7P,1R,2.5mm,ANGL	
.....5 CON02	3711-002703	CONNECTOR-HEADER;NOWALL,5P,1R,2.5mm,ANGL	
.....5 XTAL01	2801-000199	CRYSTAL-UNIT;20MHz,50ppm,28-AAA,16pF,50o	
.....5	AA63-40014A	SHIELD-CASE,T;-,SPTE,T0.5,-,-,-,SCT51A	S.N.A
.....5	AA97-07193A	ASSY AUTO-3D COMB;WT-32Z5HD,K54A,AA95-00	S.N.A
......6 CD10	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CD12	2401-002464	C-AL;47uF,20%,16V,BP,TP,8x11.5,5	
......6 CD18	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
......6 CD23	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
......6 CD24	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
......6 CD40	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
......6 CD45	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
......6 CD47	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
......6 CD57	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CD59	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CD60	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CD64	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CD66	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CD68	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CD71	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 LD01	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
......6 LD03	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
......6 LD05	2702-001096	INDUCTOR-RADIAL;33uH,10%,6x4mm	
......6 LD06	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
......6 LD07	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
......6	AA97-06948A	ASSY SMD-3D COMB;WT-32Z5HD,K54A,AA95-009	S.N.A
.......7CD11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD20	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD22	2203-001034	C-CERAMIC,CHIP;5.6nF,10%,50V,X7R,TP,1608	
.......7CD41	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD42	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD43	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD44	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD46	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD50	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD51	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD52	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD55	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD56	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD58	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD62	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD63	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD67	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD69	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD72	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD74	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD75	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	
.......7CD80	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
.......7CD81	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD84	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD85	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
.......7CD86	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD87	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD88	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	

Loc. No.	Code No.	Description ; Specification	Remark
.......7CD89	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	
.......7CD90	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD91	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7DD01	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.......7DD02	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.......7DD03	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7FD00	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
.......7FD01	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
.......7FD02	2909-001052	FILTER-LC;3.58MHz,3MHz,1.5dB,TP,11dB/1.0	
.......7FD03	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
.......7IC01	1204-001556	IC-SEPARATOR;UPD64082GF,QFP,100P,-,PLAST	
.......7IC02	1105-001334	IC-DRAM;4E151612,1Mx16Bit,TSOP,44P,400MI	
.......7IC04	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
.......7JD01	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.......7JD04	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.......7LD09	2703-000271	INDUCTOR-SMD;4.7uH,10%,2x1.25x1.25mm	
.......7LD10	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
.......7PCB	AA41-00128E	PCB-3D COMB FILTER;CT-29A7DR,FR-4,2L,E,1	S.N.A
.......7QD10	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7QD11	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7QD12	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7QD13	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7QD14	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7QD15	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7QD16	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7QD17	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7QD18	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7QD19	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7QD20	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7QD21	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7QD22	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7QD23	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7QD24	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7QD25	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7QD26	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7QD27	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7QD28	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7QD40	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7QD41	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7RD00	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD01	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD02	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
.......7RD03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD04	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
.......7RD05	2007-000088	R-CHIP;7.5Kohm,5%,1/16W,DA,TP,1608	
.......7RD06	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD07	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD08	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
.......7RD09	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
.......7RD10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD12	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
.......7RD13	2007-000088	R-CHIP;7.5Kohm,5%,1/16W,DA,TP,1608	
.......7RD14	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
.......7RD15	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD16	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
.......7RD17	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
.......7RD18	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD19	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
.......7RD20	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	
.......7RD21	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
.......7RD22	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD23	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
.......7RD24	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7RD25	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
.......7RD26	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RD27	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7RD37	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	
.......7RD38	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD39	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD40	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
.......7RD41	2007-000052	R-CHIP;10Kohm,1%,1/16W,DA,TP,1608	
.......7RD42	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
.......7RD43	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
.......7RD50	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD51	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD59	2007-000102	R-CHIP;100Kohm,5%,1/16W,DA,TP,1608	
.......7RD62	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
.......7RD63	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
.......7RD64	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD65	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD66	2007-000096	R-CHIP;30Kohm,5%,1/16W,DA,TP,1608	
.......7RD67	2007-000125	R-CHIP;3.9Kohm,5%,1/16W,DA,TP,1608	
.......7RD68	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
.......7RD69	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RD70	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RD71	2007-000234	R-CHIP;1.3Kohm,5%,1/16W,DA,TP,1608	
.......7RD72	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RD73	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD74	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RD75	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD76	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD77	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD78	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD79	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD82	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
.......7RD83	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
.......7RD84	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
.......7RD85	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
.......7RD86	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RD87	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RD88	2007-000211	R-CHIP;1.1Kohm,5%,1/16W,DA,TP,1608	
.......7RD89	2007-000113	R-CHIP;33ohm,5%,1/16W,DA,TP,1608	
.......7RD90	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD91	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RD92	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD93	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.......7RD94	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.......7RD95	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD96	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RD97	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RD98	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
....4	AA95-01793A	ASSY SUB-PCB,CAPTION;PCL545R,P54A,AA95-0	
.....5 BK01	AA61-10068A	BRACKET-PCB;M2160,SPTE,T0.3,-,-,-,-	S.N.A
.....5 CNC01	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5mm,ANG	
.....5 CNC02	3711-002708	CONNECTOR-HEADER;NOWALL,10P,1R,2.5mm,ANG	
.....5 ICC01	1204-001718	IC-DECODER;Z86129,DIP,18P,300MIL,PLASTIC	
.....5 ICC02	1001-001083	IC-VIDEO SWITCH;NJM2248D,-,DIP,8P,300MIL	
.....5 ICC03	1001-001083	IC-VIDEO SWITCH;NJM2248D,-,DIP,8P,300MIL	
.....5	AA97-05186A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
......6 CC01	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
......6 CC02	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
......6 CC03	2201-000600	C-CERAMIC,DISC;0.56nF,10%,50V,Y5P,TP,5x3	
......6 CC04	2401-000223	C-AL;100nF,20%,50V,LL,TP,5x11mm,5mm	
......6 CC05	2301-000310	C-FILM,PEF;68nF,5%,50V,TP,8.0X8.5X4.0X5,	
......6 CC06	2301-000301	C-FILM,PEF;6.8nF,5%,50V,TP,6.5X5.5X3.0X5	
......6 CC07	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
......6 CC08	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
......6 CC09	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
......6 CC10	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
......6 CC11	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
......6 CC12	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
......6 CC13	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
......6 CC14	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 CC15	2201-000600	C-CERAMIC,DISC;0.56nF,10%,50V,Y5P,TP,5x3	
......6 CC16	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 CC19	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 DC01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 DC02	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 DC03	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 LC01	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
......6 PCB	AA41-00337A	PCB-CAPTION;PCL545R,FR-1,1L,A,1.6T,245X2	S.N.A
......6 QC01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 QC02	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 RC01	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
......6 RC02	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
......6 RC03	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC04	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC05	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC06	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC07	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC08	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
......6 RC09	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC10	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
......6 RC11	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC12	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC13	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC14	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC15	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC16	2004-000218	R-METAL;10Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
......6 RC17	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC18	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC19	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC20	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC21	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC22	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC23	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC24	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC25	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
......6 RC30	2001-000708	R-CARBON;39OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4	AA95-01799R	ASSY SUB-PCB,CONV MDL;SVP-54T6SR,P54A,AA	
.....5 CN01	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
.....5 CN04	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
.....5 L01	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
.....5	AA97-06265A	ASSY SMD-SUB;SVP-54T6SR,P54A	S.N.A
......6 C01	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
......6 C02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C03	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
......6 C04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C05	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C07	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
......6 C08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C10	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C12	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C15	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 C17	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
......6 C18	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C19	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
......6 C20	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C22	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C23	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C24	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C25	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C26	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C27	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C28	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C29	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C30	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C31	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C33	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C34	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C36	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C40	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C41	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C42	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
......6 C43	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C44	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C45	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
......6 C46	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
......6 C47	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
......6 C48	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
......6 C49	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C50	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
......6 C51	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
......6 C52	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
......6 C53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C54	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
......6 C55	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
......6 C56	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
......6 C57	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C58	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C59	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
......6 C60	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
......6 C61	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
......6 C62	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C63	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
......6 C64	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
......6 C65	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
......6 C66	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C67	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
......6 C68	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
......6 C69	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
......6 C70	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
......6 C71	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
......6 C72	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
......6 C73	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
......6 C74	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
......6 C75	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C76	2203-001034	C-CERAMIC,CHIP;5.6nF,10%,50V,X7R,TP,1608	
......6 C77	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 C78	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C79	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C80	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C81	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C82	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C83	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C84	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C86	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C87	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C88	2203-001245	C-CERAMIC,CHIP;0.082nF,5%,50V,NP0,TP,201	
......6 C89	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C90	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
......6 C91	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
......6 C92	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 C93	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
......6 D01	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
......6 D02	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
......6 D03	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
......6 D04	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
......6 D05	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
......6 DZ01	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 DZ02	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 DZ03	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 DZ04	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 EF01	2901-000229	FILTER-EMI SMD;50V,0.3A,-,22000pF,4.5x3.	
......6 EF02	2901-000229	FILTER-EMI SMD;50V,0.3A,-,22000pF,4.5x3.	
......6 EF03	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
......6 EF04	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 EF05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 EF06	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
......6 EF07	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 EF08	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 EF09	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 EF10	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 EF13	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
......6 EF14	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
......6 IC01	AA13-00104A	IC ASIC;SDC11,SVP-54T6SR,208P,-0.3VTO3.8	
......6 IC02	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
......6 IC04	1203-001824	IC-VOL. DETECTOR;7042,SOT-89,3P,-,PLASTI	
......6 IC05	1103-000180	IC-EEPROM;24C16,2Kx8Bit,SOP,8P,150MIL,10	
......6 IC06	AA09-00032A	IC MICOM;,TSC87251G2D-OTP,4.5 TO 5.5V,-,	
......6 IC08	1201-001520	IC-VIDEO AMP;EL2250CS,SOIC,8P,150MIL,DUA	
......6 IC09	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	
......6 IC10	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
......6 IC11	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
......6 IC12	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
......6 IC13	1201-001135	IC-OP AMP;324,SOP,ST,14P,150MIL,QUAD,100	
......6 IC14	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
......6 IC15	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
......6 IC16	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
......6 IC17	1209-001163	IC-PLL;TLC2932IPWLE,SOP,14P,-,PLASTIC	
......6 OSC01	2804-001479	OSCILLATOR-CLOCK;24MHZ,100PPM,50PF,TP,5V	
......6 PCB	AA41-00529A	PCB-CONVERGENCE MODULE;SVP-54T6SR,FR-4,4	S.N.A
......6 Q01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 Q02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 R01	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R02	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R04	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
......6 R10	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R100	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 R101	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 R102	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 R103	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 R109	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 R11	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R110	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R111	2007-000102	R-CHIP;100Kohm,5%,1/16W,DA,TP,1608	
......6 R117	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
......6 R118	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
......6 R119	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
......6 R12	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R120	2007-000856	R-CHIP;4.3KOHM,1%,1/10W,DA,TP,2012	
......6 R121	2007-000109	R-CHIP;1Mohm,5%,1/16W,DA,TP,1608	
......6 R122	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R123	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R124	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R125	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R126	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R127	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R13	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R134	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
......6 R14	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R15	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R16	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R17	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
......6 R18	2007-000381	R-CHIP;13Kohm,5%,1/16W,DA,TP,1608	
......6 R19	2007-001056	R-CHIP;6.2Kohm,5%,1/16W,DA,TP,1608	
......6 R20	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
......6 R21	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R22	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 R23	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R28	2007-001163	R-CHIP;75OHM,1%,1/10W,DA,TP,2012	
......6 R29	2007-001163	R-CHIP;75OHM,1%,1/10W,DA,TP,2012	
......6 R30	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
......6 R32	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
......6 R33	2007-000028	R-CHIP;39OHM,5%,1/10W,DA,TP,2012	
......6 R34	2007-000028	R-CHIP;39OHM,5%,1/10W,DA,TP,2012	
......6 R37	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R38	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R39	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R40	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R41	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R42	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R43	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R44	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R45	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R46	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R47	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R48	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R49	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
......6 R50	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R51	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R52	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R53	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R54	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
......6 R55	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R56	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R57	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R58	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R59	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
......6 R60	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R61	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R62	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R63	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R64	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
......6 R65	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R66	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R67	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R68	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R69	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
......6 R70	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R71	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R72	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R73	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R74	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
......6 R75	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R77	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R78	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R79	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R80	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R81	2007-000757	R-CHIP;330KOHM,5%,1/10W,DA,TP,2012	
......6 R82	2007-000757	R-CHIP;330KOHM,5%,1/10W,DA,TP,2012	
......6 R83	2007-000757	R-CHIP;330KOHM,5%,1/10W,DA,TP,2012	
......6 R84	2007-000757	R-CHIP;330KOHM,5%,1/10W,DA,TP,2012	
......6 R85	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R86	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R87	2007-000704	R-CHIP;3.6Kohm,5%,1/16W,DA,TP,1608	
......6 R88	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R89	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R90	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R91	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R92	2007-000125	R-CHIP;3.9Kohm,5%,1/16W,DA,TP,1608	
......6 R93	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R94	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R95	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 RN01	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
......6 RN02	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
......6 RN03	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
......6 RN04	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
......6 RN05	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
......6 RN08	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
....4	AA95-01806C	ASSY SUB-PCB,DW-SRC;PCL545R,P54A,AA95-00	
.....5 CN01	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
.....5 CN02	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
.....5 CX01	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
.....5 DX01	2801-003811	CRYSTAL-UNIT;24.576MHZ,20PPM,28-AAM,30PF	
.....5 PX01	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
.....5	AA97-05338A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
......6 CC17	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
......6 CC19	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CC28	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CC32	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
......6 CC42	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CC44	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CC45	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
......6 DC16	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 DC17	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
......6 DC19	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
......6 DC27	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
......6 DC39	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
......6 DL07	2702-001092	INDUCTOR-RADIAL;2.2uH,10%,6x4mm	
......6 IC12	1203-001140	IC-VOL. DETECTOR;7039,TO-92P,3P,-,PLASTI	
......6 PC14	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
......6 PC16	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
......6 PC23	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 PC27	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
......6 PC41	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 PC43	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 SC01	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 SC03	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 SC22	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
......6 SC30	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
......6 SC31	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
......6 SC36	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
......6 SC51	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 SC53	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 YC21	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 YC26	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 YC31	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
......6 YC38	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
......6 YC57	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 YC62	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
......6 YL02	2702-000160	INDUCTOR-RADIAL;4.7uH,10%,6x6.4mm	
......6	AA97-06191A	ASSY SMD-SUB;PCL545R,P54A	S.N.A
.......7CC01	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7CC02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CC03	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7CC04	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7CC05	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7CC06	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
.......7CC07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CC08	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	

Loc. No.	Code No.	Description ; Specification	Remark
.......7CC09	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7CC10	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CC11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CC12	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CC13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CC14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CC15	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
.......7CC16	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
.......7CC18	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.......7CC20	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7CC21	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7CC22	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
.......7CC23	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.......7CC24	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.......7CC25	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.......7CC26	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.......7CC27	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.......7CC29	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7CC30	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7CC31	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
.......7CC33	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.......7CC35	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.......7CC36	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.......7CC37	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
.......7CC38	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
.......7CC39	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
.......7CC40	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
.......7CC41	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
.......7CC43	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CC47	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CC48	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
.......7CC49	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
.......7CC50	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
.......7CC51	2203-000783	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,1608	
.......7CD01	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7CD02	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7CF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
.......7CF02	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
.......7CL03	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
.......7CL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7CL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7CL07	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7CQ01	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7CQ02	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7CQ03	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7CQ04	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7CQ05	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7CR01	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
.......7CR02	2007-000028	R-CHIP;39OHM,5%,1/10W,DA,TP,2012	
.......7CR03	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
.......7CR04	2007-000028	R-CHIP;39OHM,5%,1/10W,DA,TP,2012	
.......7CR05	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7CR06	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7CR07	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7CR08	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7CR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7CR10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7CR12	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.......7CR13	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.......7CR14	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.......7CR15	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
.......7CR16	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
.......7CR20	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7CR22	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7CR25	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
.......7CR27	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7CR28	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7CR29	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
.......7CR30	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
.......7CR31	2007-000643	R-CHIP;270ohm,5%,1/16W,DA,TP,1608	
.......7CR32	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
.......7CR33	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
.......7CR35	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.......7CR37	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7CR38	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7CR45	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7CR46	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.......7CR47	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7CR48	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7CR49	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7CR50	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7CR51	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7CR52	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7CR53	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7CR54	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7CR55	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7CR56	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
.......7DC18	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7DC20	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7DC21	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.......7DC22	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.......7DC23	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7DC24	2203-001656	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,1608	
.......7DC25	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.......7DC26	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.......7DC28	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7DC29	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.......7DC30	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.......7DC31	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.......7DC32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7DC33	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7DC34	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
.......7DC35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7DC36	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
.......7DC37	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7DC38	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
.......7DD01	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7DD02	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7DD03	0403-001127	DIODE-ZENER;02DZ5.1,5.1,200mW,SOD-323,TP	
.......7DD06	0403-001127	DIODE-ZENER;02DZ5.1,5.1,200mW,SOD-323,TP	
.......7DD07	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7DL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7DL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7DQ01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7DR16	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7DR17	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7DR18	2007-000101	R-CHIP;82Kohm,5%,1/16W,DA,TP,1608	
.......7DR19	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.......7DR20	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
.......7DR22	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7DR23	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7DR24	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.......7DR25	2007-000129	R-CHIP;27Kohm,5%,1/16W,DA,TP,1608	
.......7DR26	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.......7DR27	2007-000127	R-CHIP;9.1Kohm,5%,1/16W,DA,TP,1608	
.......7DR29	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7DR30	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7DR31	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7DR32	2007-000118	R-CHIP;390ohm,5%,1/16W,DA,TP,1608	
.......7DR33	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7DR34	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7DR35	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7DR36	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7DR37	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7DR38	2007-000079	R-CHIP;1.8Kohm,5%,1/16W,DA,TP,1608	
.......7DR40	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7DR41	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7DR44	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7DR46	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
.......7IC01	1204-001598	IC-VIDEO PROCESS;VPC3230D-B2,QFP,80P,-,P	
.......7IC02	1204-001623	IC-VERTICAL PROCESSO;SDA9400,QFP,64P,-,P	
.......7IC03	1002-001045	IC-D/A CONVERTER;9280,8BIT,PLCC,68P,-,-,	
.......7IC06	1204-001372	IC-HOR./VER.PROCESSO;SDA9361,QFP,44P,-,P	
.......7IC07	1204-001550	IC-VIDEO PROCESS;CXA2101AQ,QFP,80P,-,PLA	
.......7IC11	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
.......7IC13	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
.......7PC01	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7PC02	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7PC03	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
.......7PC04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PC05	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.......7PC06	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7PC07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PC08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
.......7PC09	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PC10	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PC11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PC12	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
.......7PC13	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
.......7PC15	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.......7PC17	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7PC18	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7PC19	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
.......7PC20	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.......7PC21	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.......7PC22	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.......7PC24	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7PC25	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7PC26	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
.......7PC28	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.......7PC29	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PC30	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PC31	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PC32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PC33	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PC34	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PC35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PC36	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PC37	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PC38	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PC39	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PC40	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PC42	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PC47	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
.......7PC48	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
.......7PC49	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
.......7PC52	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7PC53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PC54	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7PC55	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.......7PC56	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.......7PC57	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.......7PC58	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.......7PC78	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PCB	AA41-00418C	PCB-DW;SP55W3HR,FR-4,4L,C,1.6T,245X245,J	S.N.A
.......7PIC01	1204-001598	IC-VIDEO PROCESS;VPC3230D-B2,QFP,80P,-,P	
.......7PIC02	1109-001144	IC-FIFO;81V04160,2x256Kx8Bit,TQFP,100P,1	
.......7PIC04	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
.......7PL01	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7PL02	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7PR01	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
.......7PR02	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
.......7PR03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7PR04	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7PR06	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.......7PR07	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.......7PR08	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.......7PR11	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
.......7PR12	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
.......7PR19	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
.......7PR20	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
.......7SC02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC05	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC06	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC09	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC12	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC23	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC24	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC25	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7SC26	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
.......7SC27	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC28	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
.......7SC29	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC33	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
.......7SC34	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC37	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC38	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
.......7SC52	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
.......7SL01	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7SL02	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7SL03	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7SL04	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7SL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7SL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7SL08	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7SL09	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
.......7SR01	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7SR02	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7SR03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7SR04	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
.......7SR05	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
.......7SR06	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
.......7SR07	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
.......7SR08	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7SR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7SR11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7SR12	2007-001056	R-CHIP;6.2Kohm,5%,1/16W,DA,TP,1608	
.......7SR13	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
.......7SR14	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7SR15	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7SR16	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
.......7SR17	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7SR18	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7SR19	2007-000381	R-CHIP;13Kohm,5%,1/16W,DA,TP,1608	
.......7SR21	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
.......7SR22	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7SR23	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7SR24	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.......7SR25	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP,2012	
.......7YC01	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC02	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC03	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC04	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC05	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC06	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC07	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC08	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC09	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC10	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC11	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC12	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC13	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC14	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC15	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC16	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC17	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC18	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC19	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC20	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC22	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC23	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7YC24	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC25	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC27	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7YC28	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7YC29	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7YC30	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC32	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7YC33	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7YC34	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7YC35	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7YC36	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7YC37	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7YC39	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
.......7YC40	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
.......7YC45	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC46	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.......7YC47	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7YC48	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7YC49	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC50	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC51	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
.......7YC52	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.......7YC53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC55	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC56	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC58	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC59	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC60	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC63	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
.......7YC66	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
.......7YD01	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
.......7YD02	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
.......7YD03	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.......7YD04	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.......7YD05	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.......7YF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
.......7YF02	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
.......7YF03	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
.......7YF04	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
.......7YF05	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
.......7YL01	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
.......7YQ01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7YQ02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7YQ03	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7YQ06	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7YQ08	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7YQ11	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7YQ12	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7YR05	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR06	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR07	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR08	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR100	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR101	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR102	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR103	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7YR104	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
.......7YR105	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
.......7YR11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR12	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR14	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.......7YR15	2007-000939	R-CHIP;47Kohm,1%,1/16W,DA,TP,1608	
.......7YR18	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR23	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7YR24	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7YR25	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR26	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR27	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR28	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR29	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
.......7YR30	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR31	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
.......7YR32	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR33	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
.......7YR40	2007-000691	R-CHIP;3.3Mohm,5%,1/16W,DA,TP,1608	
.......7YR41	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR43	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
.......7YR44	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
.......7YR45	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
.......7YR46	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR47	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR48	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR50	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
.......7YR51	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR53	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR56	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR59	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
.......7YR60	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR61	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7YR62	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.......7YR63	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR64	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR65	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
.......7YR77	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
.......7YR78	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
.......7YR79	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
.......7YR83	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR85	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR86	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR88	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7YR89	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7YR90	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR91	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR92	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR98	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7YR99	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
.....5	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3	AA94-07576A	ASSY PCB POWER;PCL545R,P54A,53	
....4 C812	2401-000701	C-AL;2200uF,20%,250V,GP,-,35x70mm,1	
....4 C813	2401-000701	C-AL;2200uF,20%,250V,GP,-,35x70mm,1	
....4 C831	2306-000323	C-FILM,MPPF;2.2nF,5%,1.6KV,TP,28.5x15.5x	
....4 C862	2401-003076	C-AL;3300uF,20%,50V,WP,BK,18x35.5mm	
....4 C865	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
....4 C868	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
....4 C875	2401-002251	C-AL;470uF,20%,200V,GP,BK,25x40mm,1	
....4 CN802	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
....4 CN803	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
⚠ 4 CX801S	2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
⚠ 4 CX802S	2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
⚠ 4 CY801S	2201-000987	C-CERAMIC,DISC;2.2nF,20%,400V,Y5U,TP,12.	
⚠ 4 CY802S	2201-000987	C-CERAMIC,DISC;2.2nF,20%,400V,Y5U,TP,12.	
⚠ 4 D801S	AA96-50310A	ASSY H/S;-,POWER,AA62-30150C,RBV606,-	S.N.A
.....5	AA62-30150C	HEAT SINK-ES;-,A6063 EXTR,-,WHT,40(24.5)	S.N.A
.....5	AA60-30003A	WASHER;T1.5,SBHG-1	S.N.A
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	0402-000549	DIODE-BRIDGE;RBV606,600V,6A,-,BK	
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
⚠ 4 D810	0402-000250	DIODE-RECTIFIER;RG4C,1000V,1A,-	
⚠ 4 D854	AA96-50153C	ASSY H/S;-,-,AA62-30013D,FLM-G12S,-	S.N.A
.....5	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30013D	HEAT SINK-ES;-,A6063 EXTR,-,-,55(21) T02	S.N.A
⚠ 4 D855	AA96-50153C	ASSY H/S;-,-,AA62-30013D,FLM-G12S,-	S.N.A
⚠ 4 D856	AA96-50153C	ASSY H/S;-,-,AA62-30013D,FLM-G12S,-	S.N.A
⚠ 4 D857	AA96-50153C	ASSY H/S;-,-,AA62-30013D,FLM-G12S,-	S.N.A
⚠ 4 D858	AA96-50153C	ASSY H/S;-,-,AA62-30013D,FLM-G12S,-	S.N.A
⚠ 4 D859	AA96-50153A	ASSY H/S;-,TR,AA62-30013D,FMG-G26S,-	S.N.A
.....5	0402-000231	DIODE-RECTIFIER;FMG-G26S,600V,4A,TO-220F	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30013D	HEAT SINK-ES;-,A6063 EXTR,-,-,55(21) T02	S.N.A
⚠ 4 FD802S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ 4 FD804S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ 4 FD855S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ 4 FP801S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ 4 IC801S	AA96-00035A	ASSY H/S;-,POWER,AA62-30181P,STR-F6656,-	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA13-00018A	IC HYBRID;-,STR-F6656,LF1351,5PIN,-,-	
.....5	AA62-30181P	HEAT SINK-ES;-,-,T1.0,WHITE,SCREW-HOLE(2	S.N.A
⚠ 4 IC804	1203-001400	IC-POWER PRESCALER;SE110N,T0-220(SIP),3P	
⚠ 4 LX801S	AA29-30002L	FILTER LINE NOISE;-,10mHMIN,5A,AC90~260V	
⚠ 4 LX802S	AA29-30002M	FILTER LINE NOISE;-,1mHMIN,5A,AC90~260V,	
⚠ 4 LX803S	AA29-30002M	FILTER LINE NOISE;-,1mHMIN,5A,AC90~260V,	
⚠ 4 NT801S	1404-001195	THERMISTOR-NTC;5.1ohm,15%,2900,27mW/C,BK	
⚠ 4 PC801S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
....4 R817	2009-001096	R-METAL PLATE;0.07ohm,5%,5W,CL,BK,5x14x1	
....4 R841	2008-001093	R-FUSIBLE(S);22OHM,5%,1/2W,AC,BK,2.5X6.5	
⚠ 4 T801S	AA26-00099A	TRANS SWITCHING;EER5345,PCL544R,AC220V,1	
....4	AA97-05241A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
.....5 C809	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
.....5 C814	2201-002041	C-CERAMIC,DISC;0.82nF,10%,2kV,Y5P,TP,9x5	
.....5 C815	2201-000406	C-CERAMIC,DISC;0.27nF,10%,2kV,Y5P,TP,6.3	
.....5 C816	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
.....5 C817	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
.....5 C818	2301-001216	C-FILM,PPF;47nF,5%,630V,TP,20x14.5x22,7.	
.....5 C819	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C833	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
.....5 C834	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
.....5 C851	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
.....5 C852	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
.....5 C853	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
.....5 C854	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
.....5 C855	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
.....5 C861	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
.....5 C864	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
.....5 C871	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
.....5 C872	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
.....5 C874	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
.....5 C877	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
⚠ 5 D834	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
⚠ 5 D843	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
⚠ 5 D851	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
⚠ 5 D853	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 DZ858	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
.....5 EL01	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL02	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL03	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL04	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL05	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL06	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL09	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL10	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL15	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL18	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL22	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL25	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EY01	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY05	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY06	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY100	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY101	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY104	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY107	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY108	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY109	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY110	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY111	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY112	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY113	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY114	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY115	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY116	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY138	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY139	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY140	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY141	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY142	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY143	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY158	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY159	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY163	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY164	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY165	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY166	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY167	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY168	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY170	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY171	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY172	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY173	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY174	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY175	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY176	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY177	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY178	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY179	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY180	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY181	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY182	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY183	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY184	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY185	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY186	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY187	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY188	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY189	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY190	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY191	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY192	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY193	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY71	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY72	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY79	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY80	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY81	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY82	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY83	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY84	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY85	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY86	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY87	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY88	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY89	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY90	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY91	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY92	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY93	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY94	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY95	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY99	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
.....5 F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
.....5 F802A	3602-000114	FUSE-HOLDER;-,-,30mohm	
.....5 F802B	3602-000114	FUSE-HOLDER;-,-,30mohm	
.....5 F804A	3602-000114	FUSE-HOLDER;-,-,30mohm	
.....5 F804B	3602-000114	FUSE-HOLDER;-,-,30mohm	
.....5 F855A	3602-000114	FUSE-HOLDER;-,-,30mohm	
.....5 F855B	3602-000114	FUSE-HOLDER;-,-,30mohm	
⚠ 5 FD805S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 5 FD806S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
⚠ 5 FD854S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 5 FD871S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
.....5 GT801	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT802	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT810	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT811	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT812	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT813	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT814	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 L806	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L807	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L808	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L810	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L811	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L812	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L813	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L814	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L815	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L816	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L831	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L832	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L851	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L857	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L859	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 PCB	AA41-00342A	PCB-POWER;PCL545R,CEM-1,1L,A,1.6T,330X24	S.N.A
.....5 Q801	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 R808	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R808A	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R812	2003-002170	R-METAL OXIDE(S);15Kohm,5%,2W,AG,TP,3.9x	
.....5 R814	2003-002170	R-METAL OXIDE(S);15Kohm,5%,2W,AG,TP,3.9x	
.....5 R815	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
.....5 R815A	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
.....5 R832	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R834	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R837	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R838	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R855	2001-001196	R-CARBON(S);9.1KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R871	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R872	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R873	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R874	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R875	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 5 RP801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 5 RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 5 RY801S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 5 VP801S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
⚠ 5 VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
....4	AA39-20009B	LEAD CONNECTOR-ASSY;,1P,YFH800-01,300,16	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	AA92-03970D	ASSY P/MATERIAL-PCB;PJTJ52A NO-T/BOARD	S.N.A
....4 CHASIS	AA69-01403A	WRAP VINYL-PACKING;SKD CHASSIS,LDPE,T0.0	S.N.A
....4 CHASIS	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
..2	AA91-00766A	ASSY-CENTER,SPK;,W3	
...3 PCS+SP	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3	AA61-00859A	PLATE-CENTER,SPK;W3,WOOD	S.N.A
...3	AA96-10153A	ASSY SPEAKER;-,8ohm,15w,001052,20609A,CE	S.N.A
....4 C-SPK	3001-000151	SPEAKER;20W,8ohm,92dB,130Hz	
....4	AA39-20609A	LEAD CONNECTOR-ASSY;,2P,SMH250-02,REC,40	

ASSY COVER REAR

Loc. No.	Code No.	Description ; Specification	Remark
1 *	AA90-02622B	ASSY COVER REAR;HCM553W3S/XAA	S.N.A
..2	AA64-02225C	CABINET-BACK,SIDE;DP,47.55W3,HIPS V0,BLK	
...3	AA64-02065C	CABINET-BACK,SIDE;47.55W3,HIPS V0,BLK	S.N.A
..2	AA67-00200A	SCREEN-TINT;55W,1249*710,T=0.7,P=0.52	
..2	BP64-00030A	CABINET-BACK,TOP;DP,55W3,BP64-00014A	
...3	BP64-00014A	CABINET BACK-TOP;55W3,PS SHEET,T4.0	
...3	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
..2	AA67-00124B	SCREEN-FRESNEL;55W,-,T2,1251*712,-,-,-,-	
..2	AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	S.N.A
..2	AA64-01849C	CABINET-BACK,BOT;DP,62J8,VO,AA64-01384B	
...3	AA64-01384B	CABINET-BACK,BOT;43,54,62J8,HIPS,-,-,-,V	
....4	0103-000161	RESIN-HIPS;BASFK456M,BLK,-,V0	S.N.A
..2	AA64-01395G	INLAY-TERMINAL;J7,J8,PS SHEET,T0.5,-,-,B	S.N.A

ASSY COVER FRONT

Loc. No.	Code No.	Description ; Specification	Remark
1 *	AA90-02621C	ASSY COVER FRONT;HCM553W3S/XAA	S.N.A
..2 AP+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2 ASP+CW	6005-001004	SCREW-WOOD;HH,+,M4,L27,BLK,SWRCH18A	S.N.A
..2 BCM+CW	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL)	S.N.A
..2 BF+BM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2 BM+CW	6005-001004	SCREW-WOOD;HH,+,M4,L27,BLK,SWRCH18A	S.N.A
..2 CBB+AP	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	S.N.A
..2 CBB+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2 CBB+EJ	6003-001022	SCREW-TAPTITE;RH,+,B,M3,L12,ZPC(BLK),SWR	S.N.A
..2 CBS+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2 CBT+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2 CFB+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2 CFWTOP	AA63-60131A	SPACER-FELT;SVP403J,FELT,-,-,-,BLK,T0.5,	S.N.A
..2 CMV+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2 CMW+CW	6005-001004	SCREW-WOOD;HH,+,M4,L27,BLK,SWRCH18A	S.N.A
..2 FP+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2 HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2 HM+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2 HV+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2 PCB+CF	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	BP61-00034A	BRACKET-MIRROR(BOT);DP,55W3,61-01093A	
...3	AA61-01093A	BRACKET-MIRROR,BOT;55W9,SECC,T1.0	S.N.A
..2	BP61-00033A	BRACKET-MIRROR(TOP);DP,55W3,61-01092A	
...3	AA61-01092A	BRACKET-MIRROR,TOP;55W9,SECC,T1.0,BLK	S.N.A
..2	BP61-00032A	BRACKET-F/MIRROR(L);DP,55W3,61-01091A	
...3	AA61-01091A	BRACKET-FRAME,MIRROR L;55W9,SECC,T1.6,BL	S.N.A
..2	BP61-00031A	BRACKET-F/MIRROR(R);DP,55W3,61-01090A	
...3	AA61-01090A	BRACKET-FRAME,MIRROR R;55W9,SECC,T1.6,BL	S.N.A
..2	AA61-00972C	HOLDER-SCREEN,R;55W3,ABS HB,BLK	S.N.A
..2	AA63-00021M	SPACER-MIRROR,BOT;50J6,PVC HB,L799,BLK	S.N.A
..2	AA63-00021L	SPACER-MIRROR,TOP;50J6,PVC HB,BLK,L1020	S.N.A
..2	AA63-00380A	COVER-CORNER;PJT,POLYESTER,-,-,-,-,CLR,#	S.N.A
..2	AA63-60002V	SPACER-FELT;-,FELT,-,-,-,BLK,T0.3,-,60X4	S.N.A
..2	BP98-00054A	ASSY K/D-SPEAKER;SP55W3HFS/XET,J52A	

Loc. No.	Code No.	Description ; Specification	Remark
...3	AA98-00049B	ASSY-LEAD,CON;-,LEAD-CON,CORE,AA39-20505	S.N.A
....4	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	AA39-20609A	LEAD CONNECTOR-ASSY;,2P,SMH250-02,REC,40	
...3	AA39-00287B	LEAD CONNECTOR-ASSY;PCL54RX,UL2547#26,UL	
...3	AA39-00086A	LEAD CONNECTOR-ASSY;,2.2UF,REC,REC,200MM	
...3	3001-001116	SPEAKER;30W,8ohm,96dB,60Hz	
...3	3001-000153	SPEAKER;20W,8ohm,93dB,1.3KHz	
...3	3001-000151	SPEAKER;20W,8ohm,92dB,130Hz	
..2	AA64-02213C	BADGE-BRAND;80MM,AL FORGING,DG703P,SAMSU	
..2	AA63-00063A	SPACER-DUAL,LOCK;SVP-614J,#400,-,-,-,-,-	S.N.A
..2	AA91-00843B	ASSY-C/FRONT,MASK;DP,64-02059E,55W3	S.N.A
...3	AA63-00380A	COVER-CORNER;PJT,POLYESTER,-,-,-,-,CLR,#	S.N.A
...3	AA63-00063A	SPACER-DUAL,LOCK;SVP-614J,#400,-,-,-,-,-	S.N.A
...3	AA64-02059E	CABINET-FRONT,MASK;55W3,HIPS HB,GRAY,DG7	
...3	AA64-02213C	BADGE-BRAND;80MM,AL FORGING,DG703P,SAMSU	
..2	AA67-00206A	MIRROR-FRONT;55W9,FSM,1027*799*540	
..2	AA64-60449B	INLAY-COVER;SP-434JMF,PS,T0.5,149.3X69.5	S.N.A
..2	AA64-60421C	INLAY-COVER;-,PS,T0.3,-,-,BLK,SEA	S.N.A
..2	6001-000137	SCREW-MACHINE;BH,+,M3,L8,ZPC(YEL),SM20C,	S.N.A
..2	AA61-00859A	PLATE-CENTER,SPK;W3,WOOD	S.N.A
..2	AA61-00617B	BRACKET-CRT,MAIN;DP,54J7,AA61-00475B	S.N.A
...3	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
...3	AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,-,-,-,-	S.N.A
..2	AA60-00072B	SPACER-COVER,DUST;43,54,62J9,SPONGE 94HF	S.N.A
..2	AA63-00021K	SPACER-MIRROR;50J6,PVC,BLK,HB L500	S.N.A
..2	AA91-00842G	ASSY-C/FRONT,BOT;DP,64-02064K MIJU,55,65	
...3	AA64-02080C	KNOB POWER;W3,ABS HB,BLK,BL903	
...3	AA64-02081B	KNOB-CH,VOL;W3,ABS HB,BLK,CHROME,GLOSSY	
...3	AA64-02082B	WINDOW-RMC,LED;W3,PC,CLEAR	
...3	AA64-02205C	BADGE-DECORATION;W3,NI+AL FORGING+NI,DG7	S.N.A
...3	AA64-02064K	CABINET-FRONT,BOT;55,65W3,HIPS V0,GRAY,S	S.N.A
...3	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
...3	AA61-00785B	GUIDE-KNOB,POWER;W3,ABS HB ,BLK,CHROME,G	S.N.A
...3	AA61-00786C	HOLDER-CONTROL;W3,ABS HB,BLK,BL903	S.N.A
...3	AA61-00791B	HOLDER-FRONT,BOT;W3,ABS HB,L40,BLK,DO	S.N.A
...3	AA61-01068A	HOLDER-CABINET,BOT(B);W3,ABS HB,L40,BLK,	S.N.A
...3	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,	S.N.A
..2	AA64-02074B	INLAY-SPEAKER;J7,J8,J9,PS SHEET,T0.5,-,-	S.N.A
..2	AA98-00288D	ASSY K/D-CABINET,WOOD;HCM553W3S/XAA,55	S.N.A
...3 B-FRAM	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 BF+WOO	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 CAS+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 HCM+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 HCW+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 HW+CW	AA60-10051B	SCREW-WOOD;-,SWRCH18A,M3.5,L11,RH,+,-,-,	S.N.A
...3 RAIL+R	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 SPK+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3	AA61-00971C	HOLDER-SCREEN,TB;55W3,ABS HB,L1282,BLK	S.N.A
...3	AA61-00723A	HOLDER-PIN,DABO;PRJT,WOODEN NAIL,OD6XL20	S.N.A
...3	AA61-00973C	HOLDER-SCREEN,L;55W3,ABS HB,BLK	S.N.A
...3	AA91-00750A	ASSY-MAGNET,PUSH;,MAGNET,W3	
...3	AA64-02208D	CABINET-WOOD;55W3HD,WOOD,MIJU	S.N.A
...3	AA63-60126G	SPACER-FELT;,FELT,BLK,T2,712X15	S.N.A
...3	AA65-00017A	CLAMPER CORE-WIRE;ALL MODEL,NYLON6.6,BLK	S.N.A
...3	AA61-00722A	HOLDER-PIN,DABO;PRJT,NYLON,OD6.5XL25,-,-	S.N.A
...3	BP61-00087B	RAIL-DOOR,L;W3,ABS HB,BLK	S.N.A
...3	BP61-00087A	RAIL-DOOR,R;W3,ABS HB,BLK	S.N.A
...3	AA61-01117B	HOLDER-SENSOR;W3,PC VIOLET	S.N.A
...3	AA61-00792B	HOLDER-SENSOR;W3,PC VIOLET	S.N.A
...3	BP61-00075A	HOLDER-JERSEY,ASSY;W3,ABS V0,GRAY,63-000	S.N.A
....4	AA63-00099C	SPACER-FELT;47W3,FELT,BLK,T0.35,30*30	S.N.A
....4	AA61-00508D	HOLDER-JERSEY;W3,ABS V0,GRAY,G4309	S.N.A
...3	AA61-00508D	HOLDER-JERSEY;W3,ABS V0,GRAY,G4309	S.N.A
...3	AA60-00078B	SPACER-DUAL,LOCK;W3,#250,19*40	S.N.A
...3	AA61-00864A	HOLDER-PCB;W3,HIPS,V0,BLK	S.N.A
...3	AA63-60126F	SPACER-FELT;,FELT,BLK,T2,310X15	S.N.A
...3	AA61-00616B	HOLDER-CRT,MAIN;54J7,DP,-,-,-,-,AA61-005	S.N.A
....4	AA61-00506B	HOLDER-CRT,MAIN;43,54,62J8,HIPS,-,-,-,BL	S.N.A
...3	AA61-00507B	HOLDER-CABINET,WOOD;43,54,62J8,ABS,-,-,-	S.N.A
...3	AA61-00458B	CASTER;-,TP4020-05 PLY,-,OH56,-,-,SR44.4	S.N.A
...3	AA61-00097A	HOLDER-WIRE;-,NYLON 6/6,-,-,-,NTR,-	S.N.A
...3	AA61-00094C	HOLDER-RAIL;PCJ533R,ABS,-,-,-,BLK,HB,480	S.N.A
...3	AA60-10050Y	SCREW-WOOD;-,SWRCH18A,M4,L40,FH,+,-,-,ZP	S.N.A
...3	6005-001006	SCREW-WOOD;FH,+,M3,L15.0,ZPC(BLK),SWRCH1	
...3	AA61-00857B	BRACKET-NUT,INSERT;W3,M3 ZN	S.N.A
...3	AA63-60126E	SPACER-FELT;,FELT,BLK,T2,275X15	S.N.A
...3	AA63-00384A	COVER-DUCT;DP 54J8,-,-,-,-,HB,-,AA63-003	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4	AA63-00348B	COVER-DUCT;54,62J8,HIPS,-,-,-,HB,BLK,-	S.N.A
...3	AA61-20219A	HOLDER-FRONT,BOT,E;,ABS,HB,L40,BLK	S.N.A
...3	AA61-10247A	BRACKET-FOCUS;S46DS,SECC,T1.0,-,-,-,-	S.N.A
...3	AA61-01070A	HOLDER-CABINET,BOT(D);W3,ABS HB,L990,BLK	S.N.A
...3	AA61-01067A	HOLDER-CABINET,BOT(A);W3,ABS HB,L40,BLK,	S.N.A
...3	AA61-00999A	HOLDER-DUAL,LOCK;W3,W1,ABS HB,BLK	S.N.A
...3	AA61-00858B	BRACKET-FRAME;W3,SECC,T2.0	S.N.A
..2	AA91-00774G	ASSY-DOOR,RACK;DP,W3,HB GRAY,64-02066E	
...3 AHD+DR	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	S.N.A
...3 DR+BD	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	S.N.A
...3	AA91-00758A	ASSY-HINGE,DOOR(R);SPRING,SECC T1.6 W3,W	
...3	AA73-00007B	RUBBER-CAP;W3,MBR,GRAY,60	S.N.A
...3	AA64-02206B	WINDOW-DOOR;W3,GLASS,T3.0,BR	
...3	AA61-00782B	BRACKET-MAGNET;W3,SPC,T2.0,FZW	S.N.A
...3	AA61-00856B	BRACKET-DOOR;47W3,SECC,T1.0,BLK	S.N.A
...3	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
...3	AA64-02066E	DOOR-RACK;47.55.65W3,HIPS HB,GRAY,SS1028	
..2	AA73-00005B	RUBBER-CAP;FLAT,PRJ,SILICONE RUBBER,WHIT	S.N.A
..2	AA67-00132A	SUN SCREEN-AG;55W,-,T=82%,1251*712*2,-,-	

ASSY P/MATERIAL

Loc. No.	Code No.	Description ; Specification	Remark
1 *	AA92-04017B	ASSY P/MATERIAL;HCM553W3S/XAA	
..2	AA61-00049B	HOLDER-BOX;-,PP,-,-,-,NTR,V0,AA61-20285A	S.N.A
...3	AA61-20285A	HOLDER-BOX;3456,PP,-,-,-,WHT,VO	S.N.A
..2	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A

ASSY K/D-SKD P/MATERIAL

Loc. No.	Code No.	Description ; Specification	Remark
1 *	AA98-01629A	ASSY K/D-SKD P/MATERIAL;SKD FORMAT-3	S.N.A
..2 WOODEN	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
..2	AA60-40006A	PIN-STAPLE;33X17.8X2.4,H18,33X17.8X2.4	S.N.A
..2	AA69-90001A	CHEMICALS-SILICAGEL;-,-,-,-,-,M2,5GR,-,-	S.N.A

ASSY SKD

Loc. No.	Code No.	Description ; Specification	Remark
1 *	AA92-05191A	ASSY SKD PART;1, , ,	S.N.A
..2 D/B	AA26-00101A	TRANS FBT;FWZ50A001E/FFA97513B,12KV,5P,-	
..2	AA65-30104B	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
⚠ ..2	AA96-00156D	ASSY POWER CORD;-,EP2/YES(US),H/C 200MM,	S.N.A
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	AA63-10002B	BAND-TIE;NYLON66 V2,L140,NTR	S.N.A
...3	AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	S.N.A
...3	AA39-10007Y	CBF POWER CORD;-,EP2/YES,SPT-2 18AWGx2C,	
...3	3811-000401	WIRE-PVC CU;BCWA,300V,ROLL,17/0.16mm,#22	S.N.A
..2	AA39-20577B	LEAD CONNECTOR-ASSY;P54A/SVP-55W3HD,UL16	
..2	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2	AA26-30006F	TRANS FBT;-,FWZ-50A001C,55',30KV	
..2	AA59-00218A	MODULE;SVP-5200,F301-P03,BK	
..2	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
..2	AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-,	S.N.A

ASSY CPT

Loc. No.	Code No.	Description ; Specification	Remark
1 *	AA91-03840A	ASSY CPT;HCL552W3S/XAA	S.N.A
..2	AA98-00294N	ASSY K/D-CRT,B;P16LSG03BMB,+380MG,DELTA	S.N.A
...3 BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	AA61-00847A	CASE-COUPLER,B;DP,PROJ,AA61-00808B	S.N.A
....4	AA61-00808B	CASE-COUPLER,B;PROJ,ALDC,T8,BLK	S.N.A
....4	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
...3	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	S.N.A
...3	AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3	AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3	BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
...3	AA91-00735B	ASSY-BRKT,CRT;DP,AA91-00722A,PROJ	
....4	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
.....5	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
.....5	AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
.....5	AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3	AA67-00156A	LENS;,DELTA 240,CLEAR,C-ELEMENT	
...3	AA67-00146A	LENS-ASSY;,DELTA 260,CLEAR A/B	
...3	AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3	AA27-00151A	DEFLECTION YOKE;-,CDY-PT0702(X),PRT,P16L	
⚠ ...3	AA03-00202A	CRT MONO;P16LSG03BMB,FREE,3.30mH,2.20mH,	
...3	AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3	AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3	AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3	AA33-00008A	MAGNET CONVERGENCE;JH92LTU-36A,7inchPRT,	
..2	AA98-00295M	ASSY K/D-CRT,G;P16LSG03HKA,+380MG,DELTA	S.N.A
...3 BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3	AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	S.N.A
...3	AA61-00846A	CASE-COUPLER,G;DP,PROJ,AA61-00807B	S.N.A
....4	AA61-00807B	CASE-COUPLER,G;PROJ,ALDC,T8,BLK	S.N.A
....4	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
...3	AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3	AA67-00146A	LENS-ASSY;,DELTA 260,CLEAR A/B	
...3	AA67-00158A	LENS;,DELTA 240,GREEN,C-ELEMENT	
...3	AA91-00735B	ASSY-BRKT,CRT;DP,AA91-00722A,PROJ	
....4	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
.....5	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
.....5	AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
.....5	AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3	BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
⚠ ...3	AA03-00201A	CRT MONO;P16LSG03HKA,FREE,3.30mH,2.20mH,	
...3	AA27-00151A	DEFLECTION YOKE;-,CDY-PT0702(X),PRT,P16L	
...3	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3	AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3	AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3	AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
..2	AA98-00297N	ASSY K/D-CRT,R;P16LSG03RJA,+380MG,DELTA2	S.N.A
...3 BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	AA61-00845A	CASE-COUPLER,R;DP,PROJ,AA61-00806B	S.N.A
....4	AA61-00806B	CASE-COUPLER,R;PROJ,ALDC,T8,BLK	S.N.A
....4	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
...3	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	S.N.A
...3	AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3	AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3	BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
...3	AA91-00735B	ASSY-BRKT,CRT;DP,AA91-00722A,PROJ	
....4	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
.....5	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
.....5	AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
.....5	AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3	AA67-00157A	LENS;,DELTA 240,RED,C-ELEMENT	
...3	AA67-00146A	LENS-ASSY;,DELTA 260,CLEAR A/B	
...3	AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3	AA27-00151A	DEFLECTION YOKE;-,CDY-PT0702(X),PRT,P16L	
⚠ ...3	AA03-00200A	CRT MONO;P16LSG03RJA,FREE,3.30mH,2.20mH,	
...3	AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3	AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3	AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3	AA33-00008A	MAGNET CONVERGENCE;JH92LTU-36A,7inchPRT,	

ASSY ACCESSORY

Loc. No.	Code No.	Description ; Specification	Remark
1 *	AA92-04025A	ASSY ACCESSORY;HCM5525W3S/XAA,P54A	S.N.A
..2	AA68-00371C	CARD WARRANTY-01;,SEA,W/P100(G),1 YEAR	S.N.A
..2	AA68-40065B	CARD-REGISTRATION;,SEA,A5,ENG,A/P220,2P(	S.N.A
..2	AA68-01509D	MANUAL USERS;HCM5525/553/653,ENG,W/P100G	
..2	AA39-00006A	CABLE RCA;,3000MM	
..2	AA59-00176A	REMOCON;-,TM63,SHARK,51,L/GRAY,DO,-,-,-,	
...3	2802-000194	RESONATOR-CERAMIC;8MHz,1.0%,TP,8.5x4.5x5	
...3	AA09-00275A	IC MICOM;Z86L8808SSC-R51PX,SOP,ST,SZTM-8	
..2	AA61-20126A	HOLDER-LEG;-,ABS,-,-,-,BLK,HB	

7-4 HCM5525WX/XAA

ASSY CHASSIS

Loc. No.	Code No.	Description ; Specification	Remark
1 *	AA91-04133A	ASSY CHASSIS;HCM5525W3S/XAA,P54A	
..2	AA94-11166F	ASSY PCB MISC-CRT;DP,PCL545R,P54A	
...3 CN501	3711-003051	CONNECTOR-HEADER;BOX,8P,1R,2.5MM,STRAIGH	
...3 CN502	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3 CN502B	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3 CN503	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3 CN503B	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3 CNW401	AA39-20027B	LEAD CONNECTOR-ASSY;,6P,67096-006,S,400,	
...3 CNW501	AA39-00127C	LEAD CONNECTOR-ASSY;,8P,35155-0800,S,500	
...3 CNW502	AA39-00112A	LEAD CONNECTOR-ASSY;,10P,35155-1000,S,30	
...3 CNW503	AA39-00112A	LEAD CONNECTOR-ASSY;,10P,35155-1000,S,30	
...3 FOCUS-	AA39-20115D	LEAD CONNECTOR-ASSY;P54A/SVP-55W3HD,UL32	
...3 FOCUS-	AA39-20115A	LEAD CONNECTOR-ASSY;,1P,BUSHING,500,3239	
...3 FOCUS-	AA39-20115D	LEAD CONNECTOR-ASSY;P54A/SVP-55W3HD,UL32	
...3 GBW-GN	AA39-00047E	LEAD CONNECTOR-ASSY;,1P,JUMPER,BLK,300MM	
...3 GBW-SC	AA39-00049A	LEAD CONNECTOR-ASSY;,1P,JUMPER,RED,300MM	
...3 GNDWIR	AA39-00198C	LEAD CONNECTOR-ASSY;P54A/SVP-55W3HD,UL16	
...3 GRW-GN	AA39-00047E	LEAD CONNECTOR-ASSY;,1P,JUMPER,BLK,300MM	
...3 GRW-SC	AA39-00049A	LEAD CONNECTOR-ASSY;,1P,JUMPER,RED,300MM	
...3 IC501	AA96-50151B	ASSY H/S;-,AMP,AA61-10060A,TDA6111Q,-	S.N.A
...3 IC531	AA96-50151B	ASSY H/S;-,AMP,AA61-10060A,TDA6111Q,-	S.N.A
...3 IC561	AA96-50151B	ASSY H/S;-,AMP,AA61-10060A,TDA6111Q,-	S.N.A
....4	1201-001131	IC-VIDEO AMP;6111,SIP,9P,-,SINGLE,-,PLAS	
....4	6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH1	S.N.A
....4	6021-000222	NUT-HEXAGON;2C,M3,ZPC(YEL),SM20C,-	S.N.A
....4	AA61-10060A	BRACKET-TR;W3220,CUS-1 1/2H,T0.5,-,-,-,-	S.N.A
...3 SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3 SG532	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3 SG562	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3 V501	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 V531	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 V561	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 VR501	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3 VR531	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3 VR561	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	AA97-05331A	ASSY AUTO-SUB;DP,PCL545R,P54A,U.S.A,54	S.N.A
....4 C502	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C503	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C504	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
....4 C505	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C506	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C507	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C510	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C511	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
....4 C512	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
....4 C513	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
....4 C514	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
....4 C532	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C533	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C534	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
....4 C535	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C536	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C537	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C540	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C541	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
....4 C542	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
....4 C543	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
....4 C562	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C563	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
....4 C564	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
....4 C565	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C566	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C567	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C570	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C571	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
....4 C572	2201-000983	C-CERAMIC,DISC;1nF,10%,2kV,Y5P,TP,9x5,7.	
....4 C573	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
....4 CN401	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
....4 D501	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D502	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D503	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 D504	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D509	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D510	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D531	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D532	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D533	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 D561	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D562	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 D563	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 DZ501	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ502	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ503	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 DZ531	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ532	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ533	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 DZ561	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ562	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ563	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 EL503	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
....4 EL504	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
....4 EL505	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
....4 EL533	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
....4 EL534	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
....4 EL535	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
....4 EL563	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
....4 EL564	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
....4 EL565	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
....4 GT501	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT502	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT503	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT504	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT531	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT532	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT533	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT534	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT561	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT562	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT563	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT564	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT565	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT566	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 L501	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L531	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L561	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 PCB	AA41-00406B	PCB-CRT;PCL545R,FR-1,1L,B,1.6T,245X245,P	S.N.A
....4 Q501	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 Q502	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 Q504	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q531	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 Q533	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q561	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 Q563	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 R500	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R502	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R503	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R504	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R505	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R506	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R507	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R508	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R509	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R510	2001-001000	R-CARBON;82KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R511	2001-000313	R-CARBON;11KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R513	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 R514	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R516	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R517	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R518	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R519	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R520	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R521	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R522	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R523	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R524	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R526	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R527	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R528	2001-001015	R-CARBON;9.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R529	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R532	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R533	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R536	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R537	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R538	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R540	2001-000837	R-CARBON;51KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R541	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R543	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 R544	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R545	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R546	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R547	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R548	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R549	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R550	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R551	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R552	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R553	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R554	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R555	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R556	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R557	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R559	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 R562	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R563	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R564	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R566	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R567	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R568	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R569	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R570	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R571	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R572	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R573	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 R574	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R575	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R576	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R577	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R578	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R579	2002-001021	R-COMPOSITION;560KOHM,10%,1/2W,AA,TP,3.7	
....4 R580	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R581	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R582	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R583	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R584	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R589	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 SG351	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG501	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG503	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG533	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG561	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG563	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
..2	AA94-08486A	ASSY PCB MISC-CONTROL;HCM553W3S/XAA,P54A	
...3 CNW01	AA39-00223A	LEAD CONNECTOR-ASSY;,11P,67096-011,35155	
...3 CNY01	3711-003353	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,ANGLE,	
...3 CNY02	3711-000447	CONNECTOR-HEADER;3WALL,3P,1R,2.5mm,ANGLE	
...3 CNYW02	AA39-00259A	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,3P	
...3 LEDY01	0601-001381	LED;ROUND,RED/GRN,5.0MM,650/563NM	
...3 RMY01	AA32-00012A	MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES	
...3 SWY01	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY02	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY03	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY04	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY05	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY06	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY07	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY08	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	AA97-05321A	ASSY AUTO-SUB;SVP-47W3HR,P54A	S.N.A
....4 CY01	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 DZY02	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4 DZY03	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4 PCB	AA41-00518A	PCB-CONTROL;SVP-47W3HR,FR-1,1L,A,1.6T,24	S.N.A
....4 QY01	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
....4 RY02	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RY03	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY04	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY05	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY06	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY07	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 RY08	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RY09	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
..2	AA94-08485A	ASSY PCB MISC-A/V FRONT;HCM553W3S/XAA,P5	
...3 CNY01A	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
...3 CNY702	3711-000447	CONNECTOR-HEADER;3WALL,3P,1R,2.5mm,ANGLE	
...3 CNYW01	AA39-00257A	LEAD CONNECTOR-ASSY;,12P,67096-012,S,120	
...3 CNYW02	AA39-00260A	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,3P	
...3 JK101	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
...3 JK102	3722-001164	JACK-PIN;3P,3.4mm,SN,WH:YE:RE,#16-22	
...3 SW101	3404-000208	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	AA91-00762D	ASSY-JACK,SIDE;,P54A PAL XAA,W3	
....4	AA61-00793C	HOLDER-JACK;W3,ABS HB,BLK,DG703P	S.N.A
....4	AA64-02085D	DOOR-AV;W3,ABS HB,BLK,DG703P	
....4	AA64-02086E	INLAY-AV;W3,PS SHEET,T0.5,P55A	S.N.A
...3	AA97-07147A	ASSY AUTO-A/V FRONT;HCL473WX/XAA,P54A,AA	S.N.A
....4 PCB	AA41-00499A	PCB-FRONT A/V;SVP-54T6SR,FR-1,1L,A,1.6T,	S.N.A
....4 RK101	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
..2	AA95-01853F	ASSY SUB-PCB,V/M;DP,PCL545R,P54A,AA95-00	S.N.A
...3 CNZ101	AA39-20055E	LEAD CONNECTOR-ASSY;,6P,YBNH025-06,67096	
...3 QZ101	AA96-50162F	ASSY H/S;-,POWER,AA62-30013E,2SA1011,30M	S.N.A
....4	0502-000131	TR-POWER;2SA1011-D,PNP,1.2W,TO-220,-,60	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30013E	HEAT SINK-ES;-,A6063 EXTR,-,-,30(21) T02	S.N.A
...3 QZ102	AA96-50162G	ASSY H/S;-,AMP,AA62-30013E,2SC2344,30MM	S.N.A
....4	0502-000153	TR-POWER;2SC2344-D,NPN,1.2W,TO-220,-,60	
....4	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30013E	HEAT SINK-ES;-,A6063 EXTR,-,-,30(21) T02	S.N.A
...3 RZ120	2008-001097	R-FUSIBLE(S);33OHM,5%,1/2W,AC,BK,2.5X6.5	
...3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
...3	AA97-05192A	ASSY AUTO-SUB;DP,PCL545R,P54A	S.N.A
....4 CNZ102	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CNZ103	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CNZ104	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CZ101	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 CZ102	2401-001157	C-AL;33uF,20%,160V,GP,TP,12.5x20,5	
....4 CZ103	2201-000516	C-CERAMIC,DISC;4.7nF,+100-0%,500V,Y5U,TP	
....4 CZ104	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
....4 CZ105	2201-000516	C-CERAMIC,DISC;4.7nF,+100-0%,500V,Y5U,TP	
....4 CZ106	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
....4 CZ107	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
....4 CZ108	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
....4 CZ109	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
....4 CZ110	2201-000604	C-CERAMIC,DISC;0.056nF,+100-0%,500V,SL,T	
....4 CZ111	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 CZ112	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
....4 DZ101	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DZ102	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DZ103	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DZ104	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DZ105	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DZ106	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 LZ101	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
....4 PCB	AA41-00344A	PCB-VM;PCL545R,FR-1,1L,A,1.6T,245X245,P5	S.N.A
....4 QZ103	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 QZ104	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QZ105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QZ106	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 RFZ101	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	

Loc. No.	Code No.	Description ; Specification	Remark
....4 RZ101	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ102	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ103	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4 RZ104	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ105	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ106	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ107	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ108	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ109	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ110	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ111	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4 RZ112	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4 RZ113	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4 RZ114	2003-000532	R-METAL OXIDE(S);18ohm,5%,2W,AF,TP,4x12m	
....4 RZ115	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ116	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ117	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ118	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ119	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ121	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ122	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 RZ123	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	AA33-00011A	MAGNET CONVERGENCE;JH92LTU-36C,29.1MM,0.	
..2	AA95-01841C	ASSY SUB-PCB,SENSOR;DP,PCL545R,P54A,AA95	
...3 CN01	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
...3 D01	0603-001067	PHOTO DIODE;-,10V,560nm,BK	
...3	AA97-05353A	ASSY AUTO-SUB;DP,PCL545R,P54A	S.N.A
....4 PCB	AA41-00433B	PCB-SENSOR;PCL545R,CEM-1,1L,A,1.6T,245X2	S.N.A
....4 Q01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 R01	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R02	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R03	2001-000454	R-CARBON;2.2MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
..2	AA95-01849X	ASSY SUB-PCB,TERMINAL;DP,PCL5415R3S,P51A	
...3 CNT01	3711-003630	CONNECTOR-HEADER;BOX,32P,2R,2.54mm,ANGLE	
...3 CNT02	3711-003630	CONNECTOR-HEADER;BOX,32P,2R,2.54mm,ANGLE	
...3 CNY01	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
...3 IC703	0904-001121	IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,30	
...3 IC705	0801-000213	IC-CMOS LOGIC;4052,MULTIPLEXER,DIP,16P,3	
...3 ICD01	1204-001510	IC-SEPARATOR;EL4583CN,DIP,16P,-,PLASTIC,	
...3 ICD02	0801-000284	IC-CMOS LOGIC;4528,MULTIVIBRATOR,DIP,16P	
...3 ICD03	1204-001510	IC-SEPARATOR;EL4583CN,DIP,16P,-,PLASTIC,	
...3 JKV02	3722-001039	JACK-PIN;9P,3.4mm,SN,BLK,#16-22	
...3 JKV03	3722-001382	JACK-PIN;5P(9P),3.4MM,NI,R/W/G/BLUE,-	
...3 JKV04	3722-001382	JACK-PIN;5P(9P),3.4MM,NI,R/W/G/BLUE,-	
...3 JKV08	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
...3 RD18	2001-000954	R-CARBON;750KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
...3	AA97-05199A	ASSY AUTO-SUB;DP,PCL5415R3S,P51A	
....4 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 C716	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 C730	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
....4 C731	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
....4 C738	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 C740	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 C760	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C761	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C762	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C763	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C764	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C765	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C766	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C767	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
....4 C780	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 CD01	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
....4 CD03	2401-003728	C-AL;10UF,°æ20%,16V,BP,TP,5X7MM,5	
....4 CD06	2401-003728	C-AL;10UF,°æ20%,16V,BP,TP,5X7MM,5	
....4 CD11	2401-003728	C-AL;10UF,°æ20%,16V,BP,TP,5X7MM,5	
....4 CD12	2401-003728	C-AL;10UF,°æ20%,16V,BP,TP,5X7MM,5	
....4 CD16	2401-003728	C-AL;10UF,°æ20%,16V,BP,TP,5X7MM,5	
....4 CD17	2401-003728	C-AL;10UF,°æ20%,16V,BP,TP,5X7MM,5	
....4 L701	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L702	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L711	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L720	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L721	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L722	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L723	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L724	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L725	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 L726	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
....4 LD01	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 LD02	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 LD04	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 RN701	2011-000160	R-NETWORK;10Kohm,5%,1/8W,A,SIP,9P,TP	
....4	AA97-06159A	ASSY SMD-SUB;DP,PCL5415R3S,P51A	
.....5 C702	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C704	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
.....5 C705	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
.....5 C706	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C707	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C708	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C709	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C710	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C711	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C712	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C713	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C714	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C715	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C717	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C718	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C719	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C720	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C721	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C722	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C723	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C724	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C727	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C732	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C733	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C734	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C735	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C736	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C737	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C739	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C741	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C768	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 C769	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....5 CD02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD05	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
.....5 CD07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD09	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 CD10	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 CD13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD15	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 CD18	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
.....5 IC701	1001-001030	IC-VIDEO SWITCH;TDA6920X,-,SOP,28P,300MI	
.....5 IC702	1001-001030	IC-VIDEO SWITCH;TDA6920X,-,SOP,28P,300MI	
.....5 PCB	AA41-00343A	PCB-TERMINAL;PCL545R,FR-4,2L,A,1.6T,180X	S.N.A
.....5 Q701	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q702	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q703	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q704	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q705	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q706	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q707	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q711	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q712	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q714	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 QD01	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 QD02	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 QD03	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 QD04	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 R701	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R702	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R703	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R704	2007-001157	R-CHIP;750ohm,5%,1/16W,DA,TP,1608	
.....5 R705	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R706	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R707	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R708	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R709	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R710	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R712	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R713	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R714	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R715	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R716	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R717	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R718	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R719	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R720	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R721	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R722	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R723	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R724	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R725	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R726	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R727	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R728	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R729	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R734	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.....5 R735	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.....5 R740	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R741	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R742	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R743	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R744	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R745	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R748	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R749	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R750	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R751	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R752	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R753	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
.....5 R754	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
.....5 R755	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R756	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R757	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R758	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.....5 R759	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 R760	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R761	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
.....5 R762	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R763	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R764	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
.....5 R765	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R766	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R767	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R768	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R769	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R774	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R775	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R776	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R777	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R779	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 R780	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R788	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R791	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R792	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R793	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R794	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.....5 R795	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R796	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R797	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R820	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R821	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 R829	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 R830	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 RD01	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 RD02	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 RD03	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
.....5 RD04	2007-000096	R-CHIP;30Kohm,5%,1/16W,DA,TP,1608	
.....5 RD05	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 RD06	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 RD07	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
.....5 RD08	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 RD09	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
.....5 RD11	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
.....5 RD12	2007-000913	R-CHIP;43Kohm,5%,1/16W,DA,TP,1608	
.....5 RD13	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 RD14	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
.....5 RD15	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
.....5 RD16	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 RD17	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....5 RD19	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 RD20	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.....5 RD21	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5 RP784	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5 RY701	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 RY702	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.....5 RY703	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
...3	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
..2	AA91-04167A	ASSY MISC-CHASSIS PACK;HCM5525W3S/XAA,	S.N.A
...3	AA98-01429A	ASSY K/D;SP55W3HFS/XET	
....4 PM+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
....4 PP+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
....4 PS+HC	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA61-00504B	HOLDER-CHASSIS;43,54,62J8,ABS,-,-,-,GRAY	S.N.A
...3	AA95-01846D	ASSY SUB-PCB,SUB;PCL545R,P54A,AA95-00705	
....4 C432	2306-000267	C-FILM,MPPF;8.2nF,5%,1.6KV,TP,28.5x18.5x	
....4 C438	2306-000267	C-FILM,MPPF;8.2nF,5%,1.6KV,TP,28.5x18.5x	
....4 C491	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
....4 C876	2401-000787	C-AL;220uF,20%,160V,GP,TP,16x31.5mm	
....4 CN202	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
....4 CN801	AA39-00180A	LEAD CONNECTOR-ASSY;,14P,YBNH250-14,3515	
....4 CN802	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
....4 CN803	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
....4 CNW801	AA39-20061G	LEAD CONNECTOR-ASSY;,3P,YFH800-03,S,100M	
....4 CNZ02	AA39-00115A	LEAD CONNECTOR-ASSY;,10P,YBNH250-10,3515	
⚠ 4 CR430S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
⚠ 4 CR431S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
⚠ 4 CR436S	2306-000235	C-FILM,MPPF;560nF,5%,400V,TP,26*22.5*14,	
⚠ 4 CR471S	2301-001091	C-FILM,MPPF;470nF,5%,400V,TP,26x21.5x14.	
⚠ 4 CR473S	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
⚠ 4 CR474S	2306-000326	C-FILM,MPPF;4.7nF,5%,1.6KV,TP,28.5x16x9m	
....4 CS803	2401-003370	C-AL;47uF,20%,450V,GP,BK,16X35.5,7.	
⚠ 4 CY811S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
⚠ 4 CY812S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
....4 D464	0402-000562	DIODE-RECTIFIER;UF5406,600V,3A,DO-201AD,	
⚠ 4 D811S	0402-000102	DIODE-BRIDGE;D2SB60,600V,1.5A,-	
....4 IC301	AA96-50406A	ASSY H/S;-,-,AA62-30180K,LA7845,-	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5	1204-000517	IC-VERTICAL DEF.;LA7845,SIP,7P,-,PLASTIC	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30180K	HEAT SINK-ES;-,A6063 EXTR,-,WHT,50/13,-,	S.N.A
⚠ 4 IC421	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
⚠ 4 IC430	1203-000162	IC-POSI.ADJUST REG.;317,TO-220,3P,-,PLAS	
⚠ 4 IC431	1201-000191	IC-OP AMP;4558,DIP,8P,300MIL,DUAL,20V/mV	
⚠ 4 IC471	1203-000610	IC-PWM CONTROLLER;494,DIP,16P,300MIL,PLA	
....4 ICS801	AA13-00024A	IC HYBRID;-,TNY253P,-,8PIN,-,-	
....4 ICS807	AA96-00111P	ASSY H/S;-,MAIN,AA62-30013L,KA278RA05,FA	S.N.A
.....5	1203-001978	IC-VOLTAGE REGULATOR;KA278RA05,TO-220F,4	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30013L	HEAT SINK-ES;-,-,-,-,44/22,-,WHT,-,-,-,-	S.N.A
....4 ICZ103	AA96-00891A	ASSY H/S;-,CONVERGENCE,AA62-30173L,STK39	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5	1201-001225	IC-VIDEO AMP;392,SIP,22P,-,TRIPLE,-,PLAS	
.....5	6003-001021	SCREW-TAPTITE;RH,+,B,M3,L15,ZPC(YEL),SWR	S.N.A
.....5	AA62-30173L	HEAT SINK;PJT,A6063,T2.0,H130,CG MODULE	S.N.A
....4 ICZ104	AA96-00891A	ASSY H/S;-,CONVERGENCE,AA62-30173L,STK39	S.N.A
....4 L432	AA27-00095A	COIL HORIZ. WIDTH;-,600uH,YL9N 15x27.5 C	
....4 L434	AA27-00221A	COIL HORIZ. WIDTH;600UH,600UH,SB5S OS6X2	
....4 L435	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
....4 L854	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
....4 L860	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
....4 L862	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
....4 L872	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
....4 L874	AA27-10002L	COIL CHOKE;-,24uH,K,-,2A,-,24UH-K,10x10m	
⚠ 4 LC431S	AA27-30003M	COIL LINEARITY;-,5uH,OWA14x15,USRC0.1x60	
⚠ 4 PC811S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
....4 Q353	0502-000442	TR-POWER;2SC4636RB,NPN,2W,TO-220,ST,10-	

Loc. No.	Code No.	Description ; Specification	Remark
....4 Q431	AA96-00033E	ASSY H/S;-,H-OUT,AA62-30173C,2SC5446, FM	S.N.A
.....5	AA62-30173C	HEAT SINK-ES;-,-,T1.0,WHITE,SCREW-HOLE(2	S.N.A
.....5	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	S.N.A
.....5	AA02-00007A	SUB ETC-MICA;DPM-04,MICA,22x29x0.15mm	S.N.A
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	0502-001175	TR-POWER;2SC5446,NPN,200000mW,TO-3PL,BK,	
.....5	0402-001296	DIODE-RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 Q433	AA96-50407A	ASSY H/S;-,-,AA62-30154G,KSD73Y,-	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5	0502-000298	TR-POWER;KSD73,NPN,30000mW,TO-220,TP,120	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30154G	HEAT SINK-ES;-,A6063 EXTR,-,WHT,50/16,-,	S.N.A
....4 Q441	AA96-50383F	ASSY H/S;-,-,AA62-30180D,2SD921,-	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5	0502-001104	TR-POWER;2SD921,NPN,80W,TO-3P,BK,700-	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30180D	HEAT SINK-ES;-,A6063 EXTR.,2,WHT,50mm,-,	S.N.A
....4 Q473	AA96-00037A	ASSY H/S;-,-,AA62-30181N,2SC4125, IRFS64	S.N.A
.....5	AA62-30181N	HEAT SINK-ES;-,-,T1.0,WHITE,SCREW-HOLE(2	S.N.A
.....5	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	S.N.A
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	0505-001202	FET-SILICON;IRFS640A,N,200V,9.8A,0.18ohm	
.....5	0502-001100	TR-POWER;2SC4125,NPN,70W,TO-3PML,BK,8-	
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
⚠ 4 RL811S	3501-001053	RELAY-POWER;5Vdc,530mW,10A,1FormA,15mS,5	
⚠ 4 RL812S	3501-001040	RELAY-POWER;12VDC,500mW,10A,1FormA,15mS,	
⚠ 4 T431	AA26-50001U	TRANS-HORIZ.DRIVE;-,-,-,28mH,-,-,105uH,-	
⚠ 4 T432	AA26-00012A	TRANS-DUMMY;-,-,-,-,-,-,-,-,-,-,-,-,-,EER4	
⚠ 4 T433	AA26-00011A	TRANS-DUMMY;-,-,-,-,-,-,-,-,-,-,-,-,-,EE28	
⚠ 4 T444S	AA26-00100A	TRANS FBT;FFA97513L,CT29A7DR,0.3mH,-,-,-	
⚠ 4 T461	AA26-50001V	TRANS-HORIZ.DRIVE;-,-,-,6.0mH,-,-,113uH,	
⚠ 4 T481	AA26-00091A	TRANS-HV-STORAGE;4mH,-,14P,830uH,180V,10	
⚠ 4 TS811S	AA26-00055B	TRANS SWITCHING;,HLK436W,AC80V,AC80~280V	
....4	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
....4	AA97-05175A	ASSY AUTO-SUB;PCL545R,P54A	
.....5 C301	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
.....5 C302	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
.....5 C303	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
.....5 C304	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
.....5 C305	2201-002022	C-CERAMIC,DISC;0.005nF,0.25pF,500V,NP0,T	
.....5 C307	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
.....5 C308	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
.....5 C309	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
.....5 C311	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
.....5 C351	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
.....5 C352	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C353	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C354	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
.....5 C355	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
.....5 C405	2201-000558	C-CERAMIC,DISC;0.47nF,10%,50V,Y5P,TP,5x3	
.....5 C406	2201-000370	C-CERAMIC,DISC;0.22nF,10%,50V,Y5P,TP,4x3	
.....5 C412	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C413	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
.....5 C417	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
.....5 C418	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
.....5 C419	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
.....5 C426	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
.....5 C427	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
.....5 C428	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
.....5 C429	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
.....5 C437	2401-003114	C-AL;4.7uF,20%,250V,WT,TP,10x16,5	
.....5 C445	2401-001622	C-AL;6.8uF,20%,50V,BP,TP,16x25mm,7.	
.....5 C449	2201-000406	C-CERAMIC,DISC;0.27nF,10%,2kV,Y5P,TP,6.3	
.....5 C450	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
.....5 C451	2401-001160	C-AL;33uF,20%,160V,GP,-,16x35mm,7.5	
.....5 C452	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
.....5 C453	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
.....5 C454	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
.....5 C455	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
.....5 C456	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
.....5 C457	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
.....5 C458	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
.....5 C459	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
.....5 C460	2303-000331	C-FILM,PPF;4.7nF,5%,630V,TP,19.5x12x7,7.	
.....5 C467	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
.....5 C468	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C469	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
.....5 C472	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
.....5 C476	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C477	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
.....5 C478	2301-000020	C-FILM,PEF;27nF,5%,100V,TP,7.3x4x12.5mm,	
.....5 C479	2301-000200	C-FILM,PEF;2.2nF,5%,200V,TP,11.0x6.0x9.0	
.....5 C480	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
.....5 C481	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
.....5 C483	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
.....5 C484	2201-000132	C-CERAMIC,DISC;0.1nF,10%,500V,Y5P,TP,6.5	
.....5 C487	2305-000178	C-FILM,MPEF;10nF,5%,100V,TP,-,5mm	
.....5 C488	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 C489	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C490	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 C492	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
.....5 C857	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
.....5 C866	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
.....5 C869	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
.....5 C873	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
.....5 CN401	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
.....5 CN403	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
⚠ 5 CR401S	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
⚠ 5 CR402S	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,	
⚠ 5 CR403S	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,	
.....5 CS804	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 CS805	2401-001101	C-AL;330uF,20%,16V,GP,TP,8x11.5,5	
.....5 CS807	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
.....5 CS808	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 CS809	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
.....5 CS812	2201-002076	C-CERAMIC,DISC;0.068nF,5%,1kV,SL,TP,8x4m	
.....5 CS813	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
.....5 CS814	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
.....5 CZ101	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
.....5 CZ102	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
.....5 CZ108	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
.....5 CZ109	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
.....5 CZ110	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
.....5 CZ111	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
.....5 CZ112	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
.....5 CZ113	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
.....5 CZ114	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
.....5 CZ115	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
.....5 CZ116	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
.....5 CZ117	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
.....5 CZ118	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
.....5 CZ126	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
.....5 CZ127	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
.....5 CZ128	2201-000499	C-CERAMIC,DISC;0.39nF,5%,50V,SL,TP,8.5x3	
.....5 CZ132	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
.....5 CZ133	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
.....5 CZ134	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
.....5 CZ135	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
.....5 CZ136	2201-000976	C-CERAMIC,DISC;0.022nF,5%,50V,NP0,TP,5x3	
.....5 CZ137	2201-000863	C-CERAMIC,DISC;0.68nF,10%,50V,Y5P,TP,5x3	
.....5 CZ138	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
.....5 CZ139	2201-000327	C-CERAMIC,DISC;2.2nF,10%,50V,Y5V,TP,6.5x	
.....5 CZ140	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 CZ141	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 CZ151	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
.....5 CZ152	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
.....5 CZ153	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
.....5 CZ154	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
.....5 CZ155	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
.....5 CZ156	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
.....5 D302	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 D353	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D384	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 D385	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D433	0402-000537	DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
.....5 D434	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 D435	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 D436	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D440	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
.....5 D441	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
.....5 D442	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D443	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D444	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 D445	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
.....5 D451	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
.....5 D453	0402-001286	DIODE-RECTIFIER;RP1H,2000V,.1A,-,TP	
.....5 D472	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 D474	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 D477	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D478	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D479	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D480	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 D484	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 D501	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 5 DR401S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 5 DR402S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 5 DR404S	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
.....5 DS805	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
.....5 DS807	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 DS809	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
.....5 DZ301	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
.....5 DZ304	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
.....5 DZ305	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
.....5 DZ306	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500mW,D	
.....5 DZ307	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
.....5 DZ386	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO	
.....5 DZ395	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
.....5 DZ400	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
.....5 DZ413	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
.....5 DZ473	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
.....5 DZ474	0403-000734	DIODE-ZENER;TZP15B,15V,14.7-16.5V,1W,DO-	
.....5 DZ481	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
⚠ 5 DZ482S	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
.....5 DZ483	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
.....5 DZ801	0406-001106	DIODE-TVS;P6KE300A,285/-/315V,600W,DO-20	
.....5 DZ802	0406-001106	DIODE-TVS;P6KE300A,285/-/315V,600W,DO-20	
.....5 DZ803	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
.....5 DZ804	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m	
.....5 DZ805	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
.....5 EL01	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EY101	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY102	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY103	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY104	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY105	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY107	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY108	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY109	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY110	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY111	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY112	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY113	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY114	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY115	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY116	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY117	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY118	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY120	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY121	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY122	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY123	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY124	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY125	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY126	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY127	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY128	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY129	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY130	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY131	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY132	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY133	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY134	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY136	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY137	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY138	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY139	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY140	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY141	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY142	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY143	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY144	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY145	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY146	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY147	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY148	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY149	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY150	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY151	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY152	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY153	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY154	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY155	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY156	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY157	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY158	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY159	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY160	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY161	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY162	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY163	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY164	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY165	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY166	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY167	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY168	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY171	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY172	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY173	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY174	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY175	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY176	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY177	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY178	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY179	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY180	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY181	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY182	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY183	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY184	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY185	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY186	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY187	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY188	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY189	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY190	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY191	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY192	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY193	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY194	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY195	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY196	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY197	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY198	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY199	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY200	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY201	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY202	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY203	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY204	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY205	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY206	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY207	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY208	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY209	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY210	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY211	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY212	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY213	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY214	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY215	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY216	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY217	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY218	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY219	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY220	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY221	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY222	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
.....5 EY223	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY224	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY225	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY226	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY227	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY228	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY229	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY230	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY231	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY232	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY233	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EYS01	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EYS02	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EYS03	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EYS04	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EYS05	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EYS06	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EYS07	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EYS08	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EYS09	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
⚠ 5 FD101S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
⚠ 5 FD102S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
.....5 GT01	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT02	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT03	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT04	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT05	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT06	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT07	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT08	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT09	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT10	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT11	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT12	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT16	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT17	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT18	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT19	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT21	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT22	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT23	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT24	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT25	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT26	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT27	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT28	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT29	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT30	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT31	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT32	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT33	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT34	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT35	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT37	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT403	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT404	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT405	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT812A	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT813A	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT814A	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
⚠ 5 ICR01S	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
.....5 L341	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
.....5 L480	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L481	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L482	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
.....5 L483	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
.....5 L493	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L494	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
.....5 L495	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L499	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 LS801	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 LS802	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 LZ107	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
.....5 LZ108	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
.....5 LZ109	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
.....5 LZ110	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
.....5 LZ111	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
.....5 LZ112	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
.....5 PCB	AA41-00340C	PCB-SUB;PCL545R,CEM-1,1L,C,1.6T,330X245,	S.N.A
.....5 Q301	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q350	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q351	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q352	0501-000366	TR-SMALL SIGNAL;KSC2330-Y,NPN,1W,TO-92L,	
.....5 Q381	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q382	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q401	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q402	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q421	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q422	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
.....5 Q432	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5 Q435	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
.....5 Q436	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q451	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q461	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q471	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q472	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,	
.....5 Q474	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q481	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q482	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
⚠ 5 QR401S	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5 QS801	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
.....5 R301	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
.....5 R302	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
.....5 R303	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5 R305	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5 R306	2003-002129	R-METAL OXIDE(S);3.9ohm,5%,2W,AF,TP,3.9x	
.....5 R307	2003-002129	R-METAL OXIDE(S);3.9ohm,5%,2W,AF,TP,3.9x	
.....5 R308	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
.....5 R310	2003-002009	R-METAL OXIDE(S);390ohm,5%,2W,AF,TP,3.9x	
.....5 R312	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R313	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R314	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R332	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
.....5 R333	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
.....5 R334	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
.....5 R350	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R351	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R352	2001-000837	R-CARBON;51KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R353	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R354	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R355	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R356	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R357	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R358	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R359	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R360	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R361	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
.....5 R362	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
.....5 R363	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
.....5 R364	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
.....5 R365	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
.....5 R366	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
.....5 R384	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R385	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R386	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R387	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R388	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R389	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R397	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R405	2009-001109	R-TEMPERATURE;240ohm,5%,1/4W,AA,TP,2.3x6	
.....5 R406	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5 R407	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
.....5 R408	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
.....5 R409	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R410	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R411	2008-001113	R-FUSIBLE(S);0.22ohm,10%,2W,AG,TP,3.9x12	
.....5 R412	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R413	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R414	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R415	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R416	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R417	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R418	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R419	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.		Code No.	Description ; Specification	Remark
.....5	R420	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R421	2003-002159	R-METAL OXIDE;150OHM,5%,1W,AG,TP,4.3X12M	
.....5	R422	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	R423	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R424	2008-001022	R-FUSIBLE(S);10ohm,5%,1W,AF,TP,2.5x6.5mm	
.....5	R425	2003-000417	R-METAL OXIDE(S);1.2Kohm,5%,3W,AA,TP,6x1	
.....5	R426	2003-002153	R-METAL OXIDE;4.7OHM,5%,2W,AG,TP,6X16MM	
.....5	R427	2003-002279	R-METAL OXIDE(S);1.2OHM,5%,2W,AG,TP,5.6X	
.....5	R427A	2003-002279	R-METAL OXIDE(S);1.2OHM,5%,2W,AG,TP,5.6X	
.....5	R428	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
.....5	R428A	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
.....5	R429	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
.....5	R430	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
.....5	R432	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5	R433	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5	R434	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5	R435	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
.....5	R436	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5	R437	2008-001087	R-FUSIBLE(S);1.8ohm,5%,2W,AG,TP,3.9x12mm	
.....5	R438	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5	R439	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5	R440	2008-000282	R-FUSIBLE;0.47ohm,5%,1W,AA,TP,3.9x12mm	
.....5	R441	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5	R442	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5	R442A	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5	R443	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
.....5	R443A	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
.....5	R444	2003-000995	R-METAL OXIDE(S);3.3Kohm,5%,2W,AF,TP,3.9	
.....5	R445	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5	R446	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R447	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5	R448	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R449	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5	R454	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R455	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R456	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R458	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R459	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	R460	2003-002044	R-METAL OXIDE(S);100ohm,5%,1W,AF,TP,2.5x	
.....5	R461	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R462	2008-001145	R-FUSIBLE;4.7OHM,5%,1/2W,AF,TP,2.5X6.5MM	
.....5	R463	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
.....5	R464	2003-002158	R-METAL OXIDE;0.68OHM,5%,1W,AG,TP,4.3X12	
.....5	R465	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5	R466	2004-001386	R-METAL(S);16.9Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5	R467	2004-001986	R-METAL(S);35.7Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5	R468	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5	R469	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5	R470	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	R471	2004-002011	R-METAL(S);110Kohm,1%,1/2W,AA,TP,2.4x6.4	
.....5	R472	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
.....5	R473	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
.....5	R474	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R475	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R482	2001-001031	R-CARBON;91KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R483	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R484	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R485	2008-001137	R-FUSIBLE(S);3.3ohm,5%,1W,AF,TP,3.9x10mm	
.....5	R486	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
.....5	R487	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R488	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R489	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R490	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R491	2001-000745	R-CARBON;4.7OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R492	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R494	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R495	2001-000262	R-CARBON;1.8MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R501	2004-001376	R-METAL(S);11Kohm,1%,1/2W,AA,TP,2.4x6.4m	
.....5	R502	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
.....5	R856	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5	R857	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5	RFS802	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP,3.9x10mm	
.....5	RFZ19	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
.....5	RFZ20	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
.....5	RFZ21	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
.....5	RFZ22	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
.....5	RFZ50	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
.....5	RFZ51	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
.....5	RFZ52	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
.....5	RFZ53	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
⚠ 5	RR401S	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 5	RR402S	2103-001086	VR-SEMI;100KOHM,25%,0.3W,TOP	
⚠ 5	RR403S	2004-004001	R-METAL(S);180Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 5	RR404S	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 5	RR405S	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 5	RR406S	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 5	RR407S	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
⚠ 5	RR408S	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
⚠ 5	RR409S	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
⚠ 5	RR410S	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
⚠ 5	RR471S	2103-001024	VR-SEMI;50Kohm,25%,0.3W,TOP	
.....5	RS801	2001-001093	R-CARBON(S);2.2KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5	RS803	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	RS804	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5	RS805	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
.....5	RS806	2001-001159	R-CARBON(S);510OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	RS807	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	RS808	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	RS809	2001-001099	R-CARBON(S);2.7KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5	RZ104	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	RZ105	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	RZ106	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	RZ107	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	RZ108	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	RZ109	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	RZ110	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	RZ111	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	RZ112	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	RZ113	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	RZ114	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	RZ115	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	RZ116	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	RZ117	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	RZ118	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	RZ123	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5	RZ124	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5	RZ125	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5	RZ126	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5	RZ127	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5	RZ128	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5	RZ129	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5	RZ129A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5	RZ130	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5	RZ130A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5	RZ131	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5	RZ131A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5	RZ132	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5	RZ132A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5	RZ133	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	RZ134	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	RZ135	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	RZ136	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	RZ137	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	RZ138	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	RZ139	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	RZ140	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	RZ141	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	RZ142	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5	RZ143	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5	RZ144	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5	RZ145	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5	RZ146	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5	RZ147	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
.....5	RZ148	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5	RZ148A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5	RZ149	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
.....5	RZ149A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
⚠ 5	VP811S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
....4		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3		AA94-08447A	ASSY PCB MAIN;HCM5525W3S/XAA,P54A	
....4	C664	2401-001068	C-AL;3300uF,20%,50V,GP,BK,22x40,10	
....4	C665	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
....4	CG-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
....4	CG-TOP	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 CN01	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
....4 CN02	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
....4 CNM01	3703-001187	CONNECTOR-DIN;64P,2R,FEMALE,STRAIGHT,AU	
....4 CNT01	3710-001208	CONNECTOR-SOCKET;32P,2R,2.54mm,STRAIGHT,	
....4 CNT02	3710-001208	CONNECTOR-SOCKET;32P,2R,2.54mm,STRAIGHT,	
....4 CNZ01	3703-001150	CONNECTOR-DIN;32P,2R,FEMALE,STRAIGHT,AUF	
....4 DW-BOT	AA63-00395B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
....4 DW-TOP	AA63-00394B	SHIELD CASE-TOP;PRJT P54A,SPTE,T0.5,-,-,	S.N.A
....4 IC102	AA96-00110C	ASSY H/S;-,-,AA62-30013K,SI-3090C,-	S.N.A
.....5	1203-000577	IC-VOLTAGE REGULATOR;3090,ZIP,5P,-,PLAST	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30013K	HEAT SINK-ES;-,-,-,-,44/18,-,WHT,A6063 E	S.N.A
....4 IC104	AA96-00110A	ASSY H/S;-,-,AA62-30013K,SI-3050C,-	S.N.A
.....5	1203-000203	IC-POSI.ADJUST REG.;3050,TO-220,5P,-,PLA	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30013K	HEAT SINK-ES;-,-,-,-,44/18,-,WHT,A6063 E	S.N.A
....4 IC106	AA96-00110A	ASSY H/S;-,-,AA62-30013K,SI-3050C,-	S.N.A
....4 IC655	AA96-00038A	ASSY H/S;-,SOUND AMP,AA62-30173E,TDA7265	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30173E	HEAT SINK-ES;-,-,T1.0,WHITE,SCREW-HOLE(1	S.N.A
....4 ICZ101	AA96-50321B	ASSY H/S;-,-,AA62-30013G,SI3050C,-	S.N.A
.....5	1203-000203	IC-POSI.ADJUST REG.;3050,TO-220,5P,-,PLA	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30013G	HEAT SINK-ES;-,AL,-,WHT,55(18),-,-,-	S.N.A
....4 ICZ102	1203-000119	IC-NEGA.FIXED REG.;7905,TO-220,3P,-,PLAS	
....4 L601	AA29-00004A	FILTER LINE NOISE;-,20UH,3A,AC80-260V,TQ	
....4 L602	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
....4 MI-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
....4 MI-TOP	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
....4 SO-BOT	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
⚠ 4 TU103S	AA59-00164A	MODULE-RF,SPLITTER;-,UMX-NT-005,-,2IN/3O	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4	AA97-03130A	ASSY ROBOT-MAIN;HCL473WX/XAA,P54A,U.S.A	S.N.A
.....5 CN201	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
.....5 CN501	3711-003051	CONNECTOR-HEADER;BOX,8P,1R,2.5MM,STRAIGH	
.....5 CN801	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
.....5 CN901	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
.....5 CNZ02	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
.....5 IC103	AA96-50147B	ASSY H/S;-,TR,AA62-30012B,KA7808,-	S.N.A
......6	1203-000293	IC-POSI.FIXED REG.;7808,TO-220,3P,-,PLAS	
......6	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
......6	AA62-30012B	HEAT SINK-ES;-,A6063 EXTR,-,-,45(16) T02	S.N.A
.....5 IC107	AA96-00111L	ASSY H/S;-,-,AA62-30013L,KA78R12,-	S.N.A
......6	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
......6	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
......6	AA62-30013L	HEAT SINK-ES;-,-,-,-,44/22,-,WHT,-,-,-,-	S.N.A
⚠ 5 TU101S	AA40-00032A	TUNER-F/S;TCPN3081PC09A(S),NTSC,TR,181CH	
⚠ 5 TU102S	AA40-00032A	TUNER-F/S;TCPN3081PC09A(S),NTSC,TR,181CH	
.....5	AA97-04483A	ASSY AUTO-MAIN;HCL473WX/XAA,P54A,U.S.A	S.N.A
......6 C100	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
......6 C101	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
......6 C102	2401-000611	C-AL;1uF,20%,50V,WT,TP,5x11,5	
......6 C103	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
......6 C104	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
......6 C105	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
......6 C106	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
......6 C107	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
......6 C110	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
......6 C111	2201-000180	C-CERAMIC,DISC;10nF,10%,50V,Y5V,TP,7x3,5	
......6 C117	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C118	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C119	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
......6 C120	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
......6 C121	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
......6 C122	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
......6 C123	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C124	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C125	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C126	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
......6 C127	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C128	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C129	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
......6 C130	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
......6 C131	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
......6 C132	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	

Loc. No.	Code No.	Description ; Specification	Remark
......6 C133	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C134	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C135	2401-003034	C-AL;220uF,20%,16V,WT,TP,8x11.5,5	
......6 C136	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
......6 C137	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
......6 C138	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
......6 C140	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C142	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
......6 C144	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
......6 C145	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
......6 C147	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
......6 C149	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
......6 C150	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
......6 C151	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
......6 C152	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
......6 C153	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C154	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C155	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C157	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
......6 C191	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
......6 C666	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C667	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
......6 C668	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
......6 C669	2401-000404	C-AL;10uF,20%,16V,BP,TP,5x11,5	
......6 C676	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
......6 C686	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
......6 C687	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
......6 C688	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
......6 C689	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C690	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
......6 C691	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
......6 C701	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
......6 C801	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
......6 C901	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
......6 C902	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C903	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 CN101	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
......6 CN601	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
......6 CN602	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
......6 CN902	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
......6 CNY01	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
......6 CZ101	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
......6 CZ102	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
......6 CZ103	2401-000689	C-AL;2200uF,20%,16V,GP,TP,13x25,5	
......6 CZ105	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 CZ106	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 CZ107	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 CZ109	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
......6 CZ110	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
......6 D603	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 D604	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 D605	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 D606	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 D664	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
......6 D665	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 D701	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 D702	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 D703	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 DZ665	0403-001039	DIODE-ZENER;MA2560,56V,52-60V,1W,DO-41,T	
......6 DZ701	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
......6 DZ801	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
......6 EL01	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL02	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL03	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL05	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL06	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL07	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL08	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL09	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL10	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL11	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL12	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL13	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL14	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL15	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL16	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL17	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
......6 EL18	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL19	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL20	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL21	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL22	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL23	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL24	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL25	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL26	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL27	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL28	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL29	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL30	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL31	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EL32	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
......6 EY01	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY02	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY03	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY04	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY05	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY06	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY07	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY08	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY09	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY10	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY11	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY12	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY13	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 EY14	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
......6 GTM02	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
......6 GTM04	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
......6 L100	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
......6 L101	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
......6 L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
......6 L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
......6 L104	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
......6 L105	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
......6 L107	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
......6 L108	2701-001007	INDUCTOR-AXIAL;24uH,10%,4.5x14mm	
......6 L110	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
......6 L111	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
......6 L112	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
......6 L113	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
......6 L603	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
......6 L604	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
......6 L605	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
......6 L901	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
......6 LDZ101	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
......6 LDZ102	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
......6 LZ101	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
......6 LZ102	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
......6 LZ103	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
......6 LZ104	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
......6 PCB	AA41-00332D	PCB-MAIN;PCL545R,FR-1,1L,D,1.6T,330X245,	S.N.A
......6 Q601	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 Q666	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 Q668	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 Q702	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 R102	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R103	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R104	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
......6 R105	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R106	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R107	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R110	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R111	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
......6 R112	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R113	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R115	2001-000869	R-CARBON;56OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R117	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R602	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R603	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
......6 R604	2001-001168	R-CARBON(S);6.8KOHM,5%,1/2W,AA,TP,2.4X6.	
......6 R605	2001-001106	R-CARBON(S);220KOHM,5%,1/2W,AA,TP,2.4X6.	
......6 R661	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
......6 R662	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
......6 R663	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R664	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
......6 R665	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
......6 R666	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
......6 R669	2001-001121	R-CARBON(S);3.6KOHM,5%,1/2W,AA,TP,2.4X6.	
......6 R670	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
......6 R671	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
......6 R672	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
......6 R673	2001-001086	R-CARBON(S);18KOHM,5%,1/2W,AA,TP,2.4X6.4	
......6 R673A	2001-001142	R-CARBON(S);3KOHM,5%,1/2W,AA,TP,2.4X6.4M	
......6 R681	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
......6 R682	2004-002019	R-METAL(S);33Kohm,1%,1/2W,AA,TP,2.5x6.5m	
......6 R683	2004-002019	R-METAL(S);33Kohm,1%,1/2W,AA,TP,2.5x6.5m	
......6 R685	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
......6 R686	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
......6 R687	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
......6 R689	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
......6 R690	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
......6 R691	2001-001144	R-CARBON(S);4.7KOHM,5%,1/2W,AA,TP,2.4X6.	
......6 R701	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R702	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R703	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R704	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 R888	2003-001098	R-METAL OXIDE(S);22Kohm,5%,3W,AA,TP,6x16	
......6 RF101	2008-001116	R-FUSIBLE(S);0.68ohm,10%,2W,AG,TP,3.9x12	
......6 RF104	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
......6 RF121	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
......6 RZ01	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
......6 RZ02	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RZ101	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RZ102	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	BP95-00052A	ASSY SUB-SOUND;PCL5415R,P54A,AA95-01103B	
.....5 CN601	3711-005105	CONNECTOR-HEADER;NOWALL,64P,2R,2.54MM,AN	
.....5 XD601	2801-000186	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,8pF,	
.....5	AA97-07221A	ASSY AUTO-SOUND;PCL5415R,P54A,AA95-01103	S.N.A
......6 CD601	2401-000444	C-AL;10uF,20%,25V,GP,TP,5x5mm,5mm	
......6 CD603	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
......6 CD604	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
......6 CD605	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
......6 CD607	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
......6 CD608	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
......6 CD609	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
......6 CD610	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
......6 CD611	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
......6 CD612	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
......6 CD614	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
......6 CD616	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
......6 CD621	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD622	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD623	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD624	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD625	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD626	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
......6 CD627	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD628	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD630	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
......6 CD632	2401-000444	C-AL;10uF,20%,25V,GP,TP,5x5mm,5mm	
......6 CD639	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
......6 CD641	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
......6 CD650	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
......6 CD652	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
......6 CD653	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD654	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 CD660	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
......6 LD601	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
......6 LD602	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
......6 LD603	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
......6	AA97-06959A	ASSY SMD-SOUND;PCL5415R,P54A,AA95-01103B	S.N.A
.......7CD602	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD606	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD613	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD617	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.......7CD618	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.......7CD619	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.......7CD620	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.......7CD629	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.......7CD631	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
.......7CD633	2203-000332	C-CERAMIC,CHIP;0.012nF,5%,50V,NP0,TP,160	
.......7CD634	2203-000332	C-CERAMIC,CHIP;0.012nF,5%,50V,NP0,TP,160	
.......7CD635	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
.......7CD636	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
.......7CD637	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
.......7CD638	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
.......7CD640	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD642	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7CD643	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7CD648	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.......7CD649	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.......7CD662	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD670	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
.......7ICD601	1204-001631	IC-SOUND PROCESSOR;MSP3450G,QFP,80P,-,PL	
.......7ICD602	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
.......7PCB	AA41-00335A	PCB-SOUND;PCL545R,FR-4,2L,A,1.6T,180X245	S.N.A
.......7RD601	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD602	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD603	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD604	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD605	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD606	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD607	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD608	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD609	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD610	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD611	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD613	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7RD614	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD615	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD616	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD617	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD618	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7RD619	2007-001179	R-CHIP;8.2Kohm,5%,1/16W,DA,TP,1608	
.......7RD620	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
.......7RD621	2007-001010	R-CHIP;51Kohm,5%,1/16W,DA,TP,1608	
.......7RD622	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
.......7RD623	2007-000329	R-CHIP;11Kohm,5%,1/16W,DA,TP,1608	
.......7RD624	2007-001010	R-CHIP;51Kohm,5%,1/16W,DA,TP,1608	
.......7RD625	2007-001179	R-CHIP;8.2Kohm,5%,1/16W,DA,TP,1608	
.......7RD626	2007-000134	R-CHIP;33Kohm,5%,1/16W,DA,TP,1608	
.......7RD627	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7RD628	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD629	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD638	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
.....5	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4	AA95-01835C	ASSY SUB-PCB,PROSCAN;PCL6215R,P54A,AA95-	
.....5 CN01	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
.....5 CN02	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
.....5 CX01	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
.....5 DX01	2801-003811	CRYSTAL-UNIT;24.576MHZ,20PPM,28-AAM,30PF	
.....5 XP701	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
.....5	AA97-05432A	ASSY AUTO-SUB;PCL6215R,P54A	
......6 CC17	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
......6 CC19	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CC28	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CC32	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
......6 CC42	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CC44	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CC45	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
......6 CP707	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CP709	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CP725	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
......6 CP727	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
......6 CP730	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
......6 CP731	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
......6 CP741	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CP742	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
......6 CP743	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
......6 CP744	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
......6 DC16	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 DC17	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
......6 DC19	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
......6 DC27	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
......6 DC39	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
......6 IC12	1203-001140	IC-VOL. DETECTOR;7039,TO-92P,3P,-,PLASTI	

Loc. No.	Code No.	Description ; Specification	Remark
......6 PC41	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 PC43	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 SC01	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 SC03	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 SC22	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
......6 SC30	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
......6 SC31	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
......6 SC36	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
......6 SC51	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 SC53	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 YC21	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 YC26	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 YC31	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
......6 YC38	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
......6 YC57	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 YC62	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
......6	AA97-06230A	ASSY SMD-SUB;PCL6215R,P54A	
.......7CC01	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7CC02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CC03	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7CC04	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7CC05	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7CC06	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
.......7CC07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CC08	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.......7CC09	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7CC10	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CC11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CC12	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CC13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CC14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CC15	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
.......7CC16	2203-001646	C-CERAMIC,CHIP;3pF,0.5pF,50V,NPO,TP,2012	
.......7CC18	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.......7CC20	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7CC21	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7CC22	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
.......7CC23	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.......7CC24	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.......7CC25	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.......7CC26	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.......7CC27	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.......7CC29	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7CC30	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7CC31	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
.......7CC33	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.......7CC35	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.......7CC36	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.......7CC37	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
.......7CC38	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
.......7CC40	2203-000681	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,160	
.......7CC41	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
.......7CC43	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CC47	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CC48	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
.......7CC49	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
.......7CC50	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
.......7CC51	2203-000783	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,1608	
.......7CD01	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7CD02	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7CF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
.......7CF02	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
.......7CL03	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
.......7CL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7CL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7CL07	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7CP701	2203-000274	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
.......7CP702	2203-000274	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
.......7CP703	2203-001223	C-CERAMIC,CHIP;0.82nF,10%,50V,X7R,TP,201	
.......7CP704	2203-000405	C-CERAMIC,CHIP;0.18nF,5%,50V,NP0,TP,1608	
.......7CP708	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CP710	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CP724	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CP726	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CP728	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7CP729	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7CP732	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
.......7CP733	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CP734	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CP745	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
.......7CP746	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
.......7CP747	2203-000683	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,201	
.......7CP748	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7CP749	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7CP750	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CP751	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CP752	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CP753	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CP754	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CP756	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CP757	2203-000938	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,2012	
.......7CQ01	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7CQ02	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7CQ03	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7CQ04	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7CQ05	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7CR01	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7CR02	2007-000028	R-CHIP;39OHM,5%,1/10W,DA,TP,2012	
.......7CR03	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
.......7CR04	2007-000028	R-CHIP;39OHM,5%,1/10W,DA,TP,2012	
.......7CR05	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7CR06	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7CR08	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7CR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7CR10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7CR15	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
.......7CR16	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
.......7CR20	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7CR22	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7CR25	2007-001166	R-CHIP;75OHM,5%,1/10W,DA,TP,2012	
.......7CR27	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7CR28	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7CR29	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
.......7CR30	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
.......7CR31	2007-000643	R-CHIP;270ohm,5%,1/16W,DA,TP,1608	
.......7CR32	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
.......7CR33	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
.......7CR35	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.......7CR37	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7CR38	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7CR39	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7CR45	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7CR46	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7CR47	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7CR48	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7CR49	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7CR50	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7CR51	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7CR52	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7CR53	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7CR54	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7CR55	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7CR56	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
.......7DC18	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7DC20	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7DC21	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.......7DC22	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.......7DC23	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7DC24	2203-001656	C-CERAMIC,CHIP;0.47nF,5%,50V,NP0,TP,1608	
.......7DC25	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.......7DC26	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.......7DC28	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7DC29	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.......7DC30	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.......7DC31	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.......7DC32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7DC33	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7DC34	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
.......7DC35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7DC36	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
.......7DC37	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7DC38	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
.......7DD01	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7DD02	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7DD03	0403-001127	DIODE-ZENER;02DZ5.1,5.1,200mW,SOD-323,TP	
.......7DD06	0403-001127	DIODE-ZENER;02DZ5.1,5.1,200mW,SOD-323,TP	
.......7DD07	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7DL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7DL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7DL07	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
.......7DQ01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7DR16	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7DR17	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7DR18	2007-000101	R-CHIP;82Kohm,5%,1/16W,DA,TP,1608	
.......7DR19	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
.......7DR20	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
.......7DR22	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7DR23	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7DR24	2007-000100	R-CHIP;68Kohm,5%,1/16W,DA,TP,1608	
.......7DR25	2007-000129	R-CHIP;27Kohm,5%,1/16W,DA,TP,1608	
.......7DR26	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.......7DR27	2007-000127	R-CHIP;9.1Kohm,5%,1/16W,DA,TP,1608	
.......7DR29	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7DR30	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7DR31	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7DR32	2007-000118	R-CHIP;390ohm,5%,1/16W,DA,TP,1608	
.......7DR33	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7DR34	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7DR35	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7DR36	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7DR37	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7DR38	2007-000079	R-CHIP;1.8Kohm,5%,1/16W,DA,TP,1608	
.......7DR40	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7DR41	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7DR44	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7DR46	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
.......7IC01	1204-001598	IC-VIDEO PROCESS;VPC3230D-B2,QFP,80P,-,P	
.......7IC02	1204-001623	IC-VERTICAL PROCESSO;SDA9400,QFP,64P,-,P	
.......7IC03	1002-001045	IC-D/A CONVERTER;9280,8BIT,PLCC,68P,-,-,	
.......7IC04	1205-001172	IC-INTERFACE;CIP3250A-B1,PLCC,68P,-,PLAS	
.......7IC06	1204-001372	IC-HOR./VER.PROCESSO;SDA9361,QFP,44P,-,P	
.......7IC07	1204-001550	IC-VIDEO PROCESS;CXA2101AQ,QFP,80P,-,PLA	
.......7IC11	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
.......7IC13	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
.......7ICP701	1204-001668	IC-PICTURE PROCESS;SDA9488X,SOP,28P,300M	
.......7LP701	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7LP702	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7LP703	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7PC42	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7PCB	AA41-00398A	PCB-PROSCAN;PCL6215R,FR-4,4L,A,1.6T,245X	S.N.A
.......7PIC04	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
.......7PL01	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7PL02	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7PL03	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7PL04	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7PL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7PR11	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
.......7PR12	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
.......7PR19	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
.......7PR714	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7PR715	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7PR716	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7PR717	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7PR718	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7PR719	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7QP701	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.......7RP701	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RP702	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RP703	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RP704	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RP705	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RP706	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RP740	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.......7RP741	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
.......7RP742	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
.......7RP743	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
.......7RP744	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
.......7RP745	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
.......7RP746	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
.......7SC02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
.......7SC05	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC06	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC07	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC09	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC12	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC23	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC24	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC25	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.......7SC26	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
.......7SC27	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC28	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
.......7SC29	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC33	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
.......7SC34	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC37	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC38	2203-000552	C-CERAMIC,CHIP;0.02nF,5%,50V,NP0,TP,1608	
.......7SC52	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SC54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7SF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
.......7SL01	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7SL02	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7SL03	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7SL04	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7SL05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7SL06	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7SL08	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.......7SL09	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
.......7SR01	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7SR02	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7SR03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7SR04	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
.......7SR05	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
.......7SR06	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
.......7SR07	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
.......7SR08	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7SR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7SR11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7SR12	2007-001056	R-CHIP;6.2Kohm,5%,1/16W,DA,TP,1608	
.......7SR13	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
.......7SR14	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7SR15	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7SR16	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
.......7SR17	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7SR18	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7SR19	2007-000381	R-CHIP;13Kohm,5%,1/16W,DA,TP,1608	
.......7SR21	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
.......7SR22	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7SR23	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7SR24	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.......7SR25	2007-000401	R-CHIP;150OHM,5%,1/10W,DA,TP,2012	
.......7YC01	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC02	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC03	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC04	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC05	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC06	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC07	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC08	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC09	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC10	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC11	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC12	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC13	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC14	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC15	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC16	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC17	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC18	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC19	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC20	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC22	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC23	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7YC24	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC25	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC27	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7YC28	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7YC29	2203-001603	C-CERAMIC,CHIP;220nF,10%,16V,X7R,TP,2012	
.......7YC30	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC32	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7YC33	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7YC34	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7YC35	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7YC36	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7YC37	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7YC39	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
.......7YC40	2203-000998	C-CERAMIC,CHIP;0.047nF,5%,50V,NP0,TP,160	
.......7YC45	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC46	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7YC47	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7YC48	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.......7YC49	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC50	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.......7YC51	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
.......7YC52	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
.......7YC53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC55	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC56	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC58	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC59	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC60	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7YC63	2203-000236	C-CERAMIC,CHIP;0.1nF,5%,50V,NP0,TP,1608	
.......7YC66	2203-000815	C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP,160	
.......7YD01	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
.......7YD02	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
.......7YD03	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.......7YD04	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.......7YD05	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.......7YF01	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
.......7YF02	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
.......7YF03	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
.......7YF04	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
.......7YF05	2901-001120	FILTER-EMI SMD;25V,100mA,-,-,3.2x1.6x1,T	
.......7YL01	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
.......7YL02	2703-000271	INDUCTOR-SMD;4.7uH,10%,2x1.25x1.25mm	
.......7YQ01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7YQ02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7YQ03	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7YQ06	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7YQ08	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7YQ11	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7YQ12	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7YR05	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR06	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR07	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR08	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR09	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR100	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR101	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR102	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR103	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
.......7YR104	2007-000402	R-CHIP;150ohm,5%,1/16W,DA,TP,1608	
.......7YR105	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
.......7YR11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR12	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR14	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7YR15	2007-000939	R-CHIP;47Kohm,1%,1/16W,DA,TP,1608	
.......7YR18	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR23	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7YR24	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7YR25	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR26	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR27	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR28	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR29	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
.......7YR30	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.......7YR31	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
.......7YR32	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR33	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
.......7YR40	2007-000691	R-CHIP;3.3Mohm,5%,1/16W,DA,TP,1608	
.......7YR41	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR43	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
.......7YR44	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
.......7YR45	2007-000799	R-CHIP;360ohm,5%,1/16W,DA,TP,1608	
.......7YR46	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR47	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR48	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR50	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
.......7YR51	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR53	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR56	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR59	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.......7YR60	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR61	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7YR62	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7YR63	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR64	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR65	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
.......7YR77	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
.......7YR78	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
.......7YR79	2007-000210	R-CHIP;1.1KOHM,5%,1/10W,DA,TP,2012	
.......7YR83	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR85	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR86	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR88	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7YR89	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7YR90	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR91	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR92	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7YR98	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7YR99	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
....4	AA39-20010F	LEAD CONNECTOR-ASSY;,1P,YFH800-01,S,700,	
....4	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
....4	AA95-01746A	ASSY SUB-PCB 3D COMB;WT-32Z5HD,K54A,AA95	
.....5 CON01	3711-002705	CONNECTOR-HEADER;NOWALL,7P,1R,2.5mm,ANGL	
.....5 CON02	3711-002703	CONNECTOR-HEADER;NOWALL,5P,1R,2.5mm,ANGL	
.....5 XTAL01	2801-000199	CRYSTAL-UNIT;20MHz,50ppm,28-AAA,16pF,50o	
.....5	AA63-40014A	SHIELD-CASE,T;-,SPTE,T0.5,-,-,-,SCT51A	S.N.A
.....5	AA97-07193A	ASSY AUTO-3D COMB;WT-32Z5HD,K54A,AA95-00	S.N.A
......6 CD10	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CD12	2401-002464	C-AL;47uF,20%,16V,BP,TP,8x11.5,5	
......6 CD18	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
......6 CD23	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
......6 CD24	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
......6 CD40	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
......6 CD45	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
......6 CD47	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
......6 CD57	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CD59	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CD60	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CD64	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CD66	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CD68	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 CD71	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 LD01	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
......6 LD03	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
......6 LD05	2702-001096	INDUCTOR-RADIAL;33uH,10%,6x4mm	
......6 LD06	2702-001095	INDUCTOR-RADIAL;18uH,10%,6x4mm	
......6 LD07	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
......6	AA97-06948A	ASSY SMD-3D COMB;WT-32Z5HD,K54A,AA95-009	S.N.A
.......7CD11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD20	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD22	2203-001034	C-CERAMIC,CHIP;5.6nF,10%,50V,X7R,TP,1608	
.......7CD41	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD42	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD43	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD44	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD46	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD50	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD51	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD52	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD54	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD55	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD56	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD58	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD62	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD63	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD67	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD69	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD72	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD74	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD75	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	
.......7CD80	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
.......7CD81	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD84	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD85	2203-000838	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,1608	
.......7CD86	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD87	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD88	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	
.......7CD89	2203-000626	C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160	
.......7CD90	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7CD91	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7DD01	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.......7DD02	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.......7DD03	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7FD00	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
.......7FD01	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
.......7FD02	2909-001052	FILTER-LC;3.58MHz,3MHz,1.5dB,TP,11dB/1.0	
.......7FD03	2909-001051	FILTER-LC;6MHz,6MHz,0.8dB,TP,5dB/6MHz,30	
.......7IC01	1204-001556	IC-SEPARATOR;UPD64082GF,QFP,100P,-,PLAST	
.......7IC02	1105-001334	IC-DRAM;4E151612,1Mx16Bit,TSOP,44P,400MI	
.......7IC04	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
.......7JD01	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.......7JD04	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.......7LD09	2703-000271	INDUCTOR-SMD;4.7uH,10%,2x1.25x1.25mm	
.......7LD10	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
.......7PCB	AA41-00128E	PCB-3D COMB FILTER;CT-29A7DR,FR-4,2L,E,1	S.N.A
.......7QD10	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7QD11	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7QD12	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7QD13	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7QD14	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7QD15	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7QD16	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7QD17	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7QD18	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7QD19	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7QD20	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7QD21	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7QD22	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7QD23	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7QD24	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7QD25	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7QD26	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7QD27	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7QD28	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.......7QD40	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7QD41	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.......7RD00	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD01	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD02	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
.......7RD03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD04	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
.......7RD05	2007-000088	R-CHIP;7.5Kohm,5%,1/16W,DA,TP,1608	
.......7RD06	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD07	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD08	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
.......7RD09	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
.......7RD10	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD11	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD12	2007-000094	R-CHIP;22Kohm,5%,1/16W,DA,TP,1608	
.......7RD13	2007-000088	R-CHIP;7.5Kohm,5%,1/16W,DA,TP,1608	
.......7RD14	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
.......7RD15	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD16	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
.......7RD17	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
.......7RD18	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD19	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.......7RD20	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	
.......7RD21	2007-000075	R-CHIP;220ohm,5%,1/16W,DA,TP,1608	
.......7RD22	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD23	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
.......7RD24	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7RD25	2007-000106	R-CHIP;220Kohm,5%,1/16W,DA,TP,1608	
.......7RD26	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RD27	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7RD37	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	
.......7RD38	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD39	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD40	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
.......7RD41	2007-000052	R-CHIP;10Kohm,1%,1/16W,DA,TP,1608	
.......7RD42	2007-000583	R-CHIP;22Kohm,1%,1/16W,DA,TP,1608	
.......7RD43	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
.......7RD50	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD51	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD59	2007-000102	R-CHIP;100Kohm,5%,1/16W,DA,TP,1608	
.......7RD62	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
.......7RD63	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
.......7RD64	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD65	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD66	2007-000096	R-CHIP;30Kohm,5%,1/16W,DA,TP,1608	
.......7RD67	2007-000125	R-CHIP;3.9Kohm,5%,1/16W,DA,TP,1608	
.......7RD68	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
.......7RD69	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RD70	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RD71	2007-000234	R-CHIP;1.3Kohm,5%,1/16W,DA,TP,1608	
.......7RD72	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RD73	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD74	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RD75	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD76	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD77	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD78	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD79	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD82	2007-000309	R-CHIP;10ohm,5%,1/16W,DA,TP,1608	
.......7RD83	2007-000124	R-CHIP;2.2Kohm,5%,1/16W,DA,TP,1608	
.......7RD84	2007-000119	R-CHIP;560ohm,5%,1/16W,DA,TP,1608	
.......7RD85	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
.......7RD86	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RD87	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RD88	2007-000211	R-CHIP;1.1Kohm,5%,1/16W,DA,TP,1608	
.......7RD89	2007-000113	R-CHIP;33ohm,5%,1/16W,DA,TP,1608	
.......7RD90	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD91	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RD92	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7RD93	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.......7RD94	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.......7RD95	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7RD96	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RD97	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7RD98	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.....5	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
....4	AA95-01793A	ASSY SUB-PCB,CAPTION;PCL545R,P54A,AA95-0	
.....5 BK01	AA61-10068A	BRACKET-PCB;M2160,SPTE,T0.3,-,-,-,-	S.N.A
.....5 CNC01	3711-002709	CONNECTOR-HEADER;NOWALL,12P,1R,2.5mm,ANG	
.....5 CNC02	3711-002708	CONNECTOR-HEADER;NOWALL,10P,1R,2.5mm,ANG	
.....5 ICC01	1204-001718	IC-DECODER;Z86129,DIP,18P,300MIL,PLASTIC	
.....5 ICC02	1001-001083	IC-VIDEO SWITCH;NJM2248D,-,DIP,8P,300MIL	
.....5 ICC03	1001-001083	IC-VIDEO SWITCH;NJM2248D,-,DIP,8P,300MIL	
.....5	AA97-05186A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
......6 CC01	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
......6 CC02	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
......6 CC03	2201-000600	C-CERAMIC,DISC;0.56nF,10%,50V,Y5P,TP,5x3	
......6 CC04	2401-000223	C-AL;100nF,20%,50V,LL,TP,5x11mm,5mm	
......6 CC05	2301-000310	C-FILM,PEF;68nF,5%,50V,TP,8.0X8.5X4.0X5,	
......6 CC06	2301-000301	C-FILM,PEF;6.8nF,5%,50V,TP,6.5X5.5X3.0X5	
......6 CC07	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
......6 CC08	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
......6 CC09	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
......6 CC10	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
......6 CC11	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
......6 CC12	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
......6 CC13	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
......6 CC14	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 CC15	2201-000600	C-CERAMIC,DISC;0.56nF,10%,50V,Y5P,TP,5x3	
......6 CC16	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 CC19	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 DC01	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 DC02	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 DC03	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
......6 LC01	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
......6 PCB	AA41-00337A	PCB-CAPTION;PCL545R,FR-1,1L,A,1.6T,245X2	S.N.A
......6 QC01	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 QC02	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 RC01	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
......6 RC02	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
......6 RC03	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC04	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC05	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC06	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC07	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC08	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC09	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC10	2004-000433	R-METAL;1Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
......6 RC11	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC12	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC13	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC14	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC15	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC16	2004-000218	R-METAL;10Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
......6 RC17	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC18	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC19	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC20	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC21	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC22	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC23	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC24	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
......6 RC25	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
......6 RC30	2001-000708	R-CARBON;39OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4	AA95-01799R	ASSY SUB-PCB,CONV MDL;SVP-54T6SR,P54A,AA	
.....5 CN01	3703-001124	CONNECTOR-DIN;32P,2R,MALE,ANGLE,AUF	
.....5 CN04	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
.....5 L01	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
.....5	AA97-06265A	ASSY SMD-SUB;SVP-54T6SR,P54A	S.N.A
......6 C01	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
......6 C02	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C03	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
......6 C04	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C05	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C07	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
......6 C08	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C10	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C11	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C12	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C13	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C14	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C15	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
......6 C17	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
......6 C18	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C19	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
......6 C20	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C21	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C22	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C23	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C24	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C25	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C26	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C27	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C28	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C29	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C30	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C31	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C32	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C33	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C34	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C35	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C36	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C40	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C41	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
......6 C42	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
......6 C43	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C44	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C45	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
......6 C46	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
......6 C47	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
......6 C48	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
......6 C49	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C50	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
......6 C51	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
......6 C52	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
......6 C53	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C54	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
......6 C55	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
......6 C56	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
......6 C57	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C58	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C59	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
......6 C60	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
......6 C61	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
......6 C62	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C63	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
......6 C64	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
......6 C65	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
......6 C66	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C67	2203-000357	C-CERAMIC,CHIP;0.15nF,5%,50V,NP0,TP,1608	
......6 C68	2203-001071	C-CERAMIC,CHIP;0.056nF,5%,50V,NP0,TP,160	
......6 C69	2203-000041	C-CERAMIC,CHIP;0.01nF,0.25pF,50V,NP0,TP,	
......6 C70	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
......6 C71	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
......6 C72	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
......6 C73	2203-001083	C-CERAMIC,CHIP;0.005nF,0.1pF,50V,NP0,TP,	
......6 C74	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
......6 C75	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C76	2203-001034	C-CERAMIC,CHIP;5.6nF,10%,50V,X7R,TP,1608	
......6 C77	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 C78	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C79	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C80	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C81	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C82	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C83	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C84	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C86	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C87	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C88	2203-001245	C-CERAMIC,CHIP;0.082nF,5%,50V,NP0,TP,201	
......6 C89	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C90	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
......6 C91	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
......6 C92	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
......6 C93	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
......6 D01	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
......6 D02	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
......6 D03	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
......6 D04	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
......6 D05	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
......6 DZ01	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 DZ02	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 DZ03	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 DZ04	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
......6 EF01	2901-000229	FILTER-EMI SMD;50V,0.3A,-,22000pF,4.5x3.	
......6 EF02	2901-000229	FILTER-EMI SMD;50V,0.3A,-,22000pF,4.5x3.	
......6 EF03	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
......6 EF04	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 EF05	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 EF06	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
......6 EF07	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 EF08	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 EF09	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 EF10	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
......6 EF13	2901-000226	FILTER-EMI SMD;25V,0.3A,-,100pF,3.2x1.25	
......6 EF14	2007-000029	R-CHIP;0OHM,5%,1/10W,DA,TP,2012	
......6 IC01	AA13-00104A	IC ASIC;SDC11,SVP-54T6SR,208P,-0.3VTO3.8	
......6 IC02	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
......6 IC04	1203-001824	IC-VOL. DETECTOR;7042,SOT-89,3P,-,PLASTI	
......6 IC05	1103-000180	IC-EEPROM;24C16,2Kx8Bit,SOP,8P,150MIL,10	
......6 IC06	AA09-00032A	IC MICOM;,TSC87251G2D-OTP,4.5 TO 5.5V,-,	
......6 IC08	1201-001520	IC-VIDEO AMP;EL2250CS,SOIC,8P,150MIL,DUA	
......6 IC09	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	
......6 IC10	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
......6 IC11	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
......6 IC12	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
......6 IC13	1201-001135	IC-OP AMP;324,SOP,ST,14P,150MIL,QUAD,100	
......6 IC14	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
......6 IC15	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
......6 IC16	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
......6 IC17	1209-001163	IC-PLL;TLC2932IPWLE,SOP,14P,-,PLASTIC	
......6 OSC01	2804-001479	OSCILLATOR-CLOCK;24MHZ,100PPM,50PF,TP,5V	
......6 PCB	AA41-00529A	PCB-CONVERGENCE MODULE;SVP-54T6SR,FR-4,4	S.N.A
......6 Q01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 Q02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
......6 R01	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R02	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R03	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R04	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R10	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R100	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 R101	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 R102	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 R103	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 R109	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 R11	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R110	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R111	2007-000102	R-CHIP;100Kohm,5%,1/16W,DA,TP,1608	
......6 R117	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
......6 R118	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
......6 R119	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
......6 R12	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R120	2007-000856	R-CHIP;4.3KOHM,1%,1/10W,DA,TP,2012	
......6 R121	2007-000109	R-CHIP;1Mohm,5%,1/16W,DA,TP,1608	
......6 R122	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R123	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R124	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R125	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R126	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R127	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R13	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R134	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
......6 R14	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R15	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R16	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R17	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
......6 R18	2007-000381	R-CHIP;13Kohm,5%,1/16W,DA,TP,1608	
......6 R19	2007-001056	R-CHIP;6.2Kohm,5%,1/16W,DA,TP,1608	
......6 R20	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
......6 R21	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R22	2007-001167	R-CHIP;75ohm,5%,1/16W,DA,TP,1608	
......6 R23	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R28	2007-001163	R-CHIP;75OHM,1%,1/10W,DA,TP,2012	
......6 R29	2007-001163	R-CHIP;75OHM,1%,1/10W,DA,TP,2012	
......6 R30	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
......6 R32	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
......6 R33	2007-000028	R-CHIP;39OHM,5%,1/10W,DA,TP,2012	
......6 R34	2007-000028	R-CHIP;39OHM,5%,1/10W,DA,TP,2012	
......6 R37	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R38	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R39	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R40	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R41	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R42	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R43	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R44	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R45	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R46	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R47	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R48	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R49	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
......6 R50	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R51	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R52	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R53	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R54	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
......6 R55	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R56	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
......6 R57	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R58	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R59	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
......6 R60	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R61	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R62	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R63	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R64	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
......6 R65	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R66	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R67	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R68	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R69	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
......6 R70	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R71	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R72	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R73	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R74	2007-000080	R-CHIP;2Kohm,5%,1/16W,DA,TP,1608	
......6 R75	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R77	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R78	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R79	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R80	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R81	2007-000757	R-CHIP;330KOHM,5%,1/10W,DA,TP,2012	
......6 R82	2007-000757	R-CHIP;330KOHM,5%,1/10W,DA,TP,2012	
......6 R83	2007-000757	R-CHIP;330KOHM,5%,1/10W,DA,TP,2012	
......6 R84	2007-000757	R-CHIP;330KOHM,5%,1/10W,DA,TP,2012	
......6 R85	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R86	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
......6 R87	2007-000704	R-CHIP;3.6Kohm,5%,1/16W,DA,TP,1608	
......6 R88	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
......6 R89	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R90	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R91	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
......6 R92	2007-000125	R-CHIP;3.9Kohm,5%,1/16W,DA,TP,1608	
......6 R93	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R94	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
......6 R95	2007-000072	R-CHIP;47ohm,5%,1/16W,DA,TP,1608	
......6 RN01	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
......6 RN02	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
......6 RN03	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
......6 RN04	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
......6 RN05	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
......6 RN08	2011-000585	R-NETWORK;47ohm,5%,63mW,L,CHIP,8P,TP	
....4	AA95-01824C	ASSY SUB-PCB,MICOM;PCL545R,P54A,AA95-007	
.....5 CN901	3703-001175	CONNECTOR-DIN;64P,2R,MALE,ANGLE,AU	
.....5 IC901	AA09-00260A	IC MICOM;SZM-422A2, ,52P,5V,12MHZ,W3-PRO	
.....5 IC902	1103-001213	IC-EEPROM;M24C16-WBN6,2048x8Bit,SDIP,8P,	
.....5 L903	2701-001032	INDUCTOR-AXIAL;100uH,10%,5x14mm	
.....5 X901	2801-003224	CRYSTAL-UNIT;32.768KHz,20ppm,28-AAY,12.5	
.....5	AA97-05187A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
......6 C901	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
......6 C904	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C905	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 C906	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C907	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
......6 C908	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
......6 C909	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
......6 C910	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
......6 C911	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
......6 C912	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C913	2201-000193	C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP,	
......6 C914	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
......6 C915	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C916	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9,5mm	
......6 C917	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
......6 C918	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C919	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
......6 C920	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C925	2201-000119	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,	
......6 C926	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
......6 C927	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
......6 C928	2201-000578	C-CERAMIC,DISC;0.047nF,5%,50V,UJ,TP,5x3.	
......6 F901	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
......6 IC903	1203-001274	IC-VOL. DETECTOR;7545,TO-92,3P,-,PLASTIC	
......6 IC904	1203-000515	IC-VOL. DETECTOR;7042,TO-92,3P,177MIL,PL	
......6 L902	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
......6 L910	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
......6 L911	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
......6 L912	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
......6 L913	2702-001094	INDUCTOR-RADIAL;10uH,10%,6x4mm	
......6 Q901	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 Q902	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 Q903	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 Q909	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
......6 Q910	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6 Q911	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
......6	AA97-06149A	ASSY SMD-SUB;PCL545R,P54A	S.N.A
.......7C902	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.......7C903	2203-000595	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,2012	
.......7C921	2203-000595	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,2012	
.......7D901	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7D902	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7D903	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7D904	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7D905	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.......7DZ903	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.......7DZ904	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.......7DZ905	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.......7DZ911	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
.......7DZ912	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
.......7DZ913	0403-000620	DIODE-ZENER;RLZ5.6B,5.6,500mW,LL-34,TP	
.......7DZ916	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.......7DZ917	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.......7DZ918	0403-001016	DIODE-ZENER;RLZ6.2B,6.2V,5.96-6.27V,400m	
.......7PCB	AA41-00338B	PCB-MICOM;PCL545R,FR-4,2L,B,1.6T,180X245	S.N.A
.......7R901	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7R902	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7R903	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7R904	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.......7R905	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7R907	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7R908	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7R911	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.......7R912	2007-000076	R-CHIP;330ohm,5%,1/16W,DA,TP,1608	
.......7R913	2007-000097	R-CHIP;47Kohm,5%,1/16W,DA,TP,1608	
.......7R914	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7R915	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7R916	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
.......7R917	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
.......7R918	2007-000869	R-CHIP;4.7Kohm,1%,1/16W,DA,TP,1608	
.......7R919	2007-000458	R-CHIP;18Kohm,5%,1/16W,DA,TP,1608	
.......7R920	2007-000077	R-CHIP;470ohm,5%,1/16W,DA,TP,1608	
.......7R921	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
.......7R922	2007-000087	R-CHIP;6.8Kohm,5%,1/16W,DA,TP,1608	
.......7R923	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7R924	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7R925	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
.......7R926	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
.......7R927	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
.......7R928	2007-000081	R-CHIP;2.7Kohm,5%,1/16W,DA,TP,1608	
.......7R929	2007-000123	R-CHIP;1.5Kohm,5%,1/16W,DA,TP,1608	
.......7R930	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7R931	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7R932	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7R934	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7R935	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7R936	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7R937	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7R945	2007-001093	R-CHIP;620ohm,5%,1/16W,DA,TP,1608	
.......7R946	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.......7R947	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.......7R948	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7R949	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	
.......7R950	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7R951	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	
.......7R958	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7R959	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7R960	2007-000074	R-CHIP;100ohm,5%,1/16W,DA,TP,1608	
.......7R961	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7R962	2007-000098	R-CHIP;56Kohm,5%,1/16W,DA,TP,1608	
.......7R963	2007-000082	R-CHIP;3.3Kohm,5%,1/16W,DA,TP,1608	
.......7R964	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7R965	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.......7R967	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7R968	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7R969	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7R971	2007-000086	R-CHIP;5.6Kohm,5%,1/16W,DA,TP,1608	
.......7R972	2007-000070	R-CHIP;0ohm,5%,1/16W,DA,TP,1608	
.......7R973	2007-000084	R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608	
.......7R974	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7R976	2007-000078	R-CHIP;1Kohm,5%,1/16W,DA,TP,1608	
.......7R977	2007-000305	R-CHIP;10Mohm,5%,1/16W,DA,TP,1608	
.......7R978	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.......7R981	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
.......7R982	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
.......7R983	2007-000122	R-CHIP;1.2Kohm,5%,1/16W,DA,TP,1608	
.....5	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3	AA94-07576A	ASSY PCB POWER;PCL545R,P54A,53	
....4 C812	2401-000701	C-AL;2200uF,20%,250V,GP,-,35x70mm,1	
....4 C813	2401-000701	C-AL;2200uF,20%,250V,GP,-,35x70mm,1	
....4 C831	2306-000323	C-FILM,MPPF;2.2nF,5%,1.6KV,TP,28.5x15.5x	
....4 C862	2401-003076	C-AL;3300uF,20%,50V,WP,BK,18x35.5mm	
....4 C865	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
....4 C868	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
....4 C875	2401-002251	C-AL;470uF,20%,200V,GP,BK,25x40mm,1	
....4 CN802	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
....4 CN803	AA39-00116A	LEAD CONNECTOR-ASSY;,12P,YBNH250-12,3515	
⚠ 4 CX801S	2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
⚠ 4 CX802S	2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
⚠ 4 CY801S	2201-000987	C-CERAMIC,DISC;2.2nF,20%,400V,Y5U,TP,12.	
⚠ 4 CY802S	2201-000987	C-CERAMIC,DISC;2.2nF,20%,400V,Y5U,TP,12.	
⚠ 4 D801S	AA96-50310A	ASSY H/S;-,POWER,AA62-30150C,RBV606,-	S.N.A
.....5	AA62-30150C	HEAT SINK-ES;-,A6063 EXTR,-,WHT,40(24.5)	S.N.A
.....5	AA60-30003A	WASHER;T1.5,SBHG-1	S.N.A
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	0402-000549	DIODE-BRIDGE;RBV606,600V,6A,-,BK	
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
⚠ 4 D810	0402-000250	DIODE-RECTIFIER;RG4C,1000V,1A,-	
⚠ 4 D854	AA96-50153C	ASSY H/S;-,-,AA62-30013D,FLM-G12S,-	S.N.A
.....5	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30013D	HEAT SINK-ES;-,A6063 EXTR,-,-,55(21) T02	S.N.A
⚠ 4 D855	AA96-50153C	ASSY H/S;-,-,AA62-30013D,FLM-G12S,-	S.N.A
⚠ 4 D856	AA96-50153C	ASSY H/S;-,-,AA62-30013D,FLM-G12S,-	S.N.A
⚠ 4 D857	AA96-50153C	ASSY H/S;-,-,AA62-30013D,FLM-G12S,-	S.N.A
⚠ 4 D858	AA96-50153C	ASSY H/S;-,-,AA62-30013D,FLM-G12S,-	S.N.A
⚠ 4 D859	AA96-50153A	ASSY H/S;-,TR,AA62-30013D,FMG-G26S,-	S.N.A
.....5	0402-000231	DIODE-RECTIFIER;FMG-G26S,600V,4A,TO-220F	
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA62-30013D	HEAT SINK-ES;-,A6063 EXTR,-,-,55(21) T02	S.N.A
⚠ 4 FD802S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ 4 FD804S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ 4 FD855S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ 4 FP801S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ 4 IC801S	AA96-00035A	ASSY H/S;-,POWER,AA62-30181P,STR-F6656,-	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	AA13-00018A	IC HYBRID;-,STR-F6656,LF1351,5PIN,-,-	
.....5	AA62-30181P	HEAT SINK-ES;-,-,T1.0,WHITE,SCREW-HOLE(2	S.N.A
⚠ 4 IC804	1203-001400	IC-POWER PRESCALER;SE110N,T0-220(SIP),3P	
⚠ 4 LX801S	AA29-30002L	FILTER LINE NOISE;-,10mHMIN,5A,AC90~260V	
⚠ 4 LX802S	AA29-30002M	FILTER LINE NOISE;-,1mHMIN,5A,AC90~260V,	
⚠ 4 LX803S	AA29-30002M	FILTER LINE NOISE;-,1mHMIN,5A,AC90~260V,	
⚠ 4 NT801S	1404-001195	THERMISTOR-NTC;5.1ohm,15%,2900,27mW/C,BK	
⚠ 4 PC801S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
....4 R817	2009-001096	R-METAL PLATE;0.07ohm,5%,5W,CL,BK,5x14x1	
....4 R841	2008-001093	R-FUSIBLE(S);22OHM,5%,1/2W,AC,BK,2.5X6.5	
⚠ 4 T801S	AA26-00099A	TRANS SWITCHING;EER5345,PCL544R,AC220V,1	
....4	AA97-05241A	ASSY AUTO-SUB;PCL545R,P54A	S.N.A
.....5 C809	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
.....5 C814	2201-002041	C-CERAMIC,DISC;0.82nF,10%,2kV,Y5P,TP,9x5	
.....5 C815	2201-000406	C-CERAMIC,DISC;0.27nF,10%,2kV,Y5P,TP,6.3	
.....5 C816	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
.....5 C817	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
.....5 C818	2301-001216	C-FILM,PPF;47nF,5%,630V,TP,20x14.5x22,7.	
.....5 C819	2201-000332	C-CERAMIC,DISC;2.2nF,20%,250V,Y5U,TP,9x4	
.....5 C833	2201-000292	C-CERAMIC,DISC;1nF,10%,50V,Y5P,TP,5x3.5,	
.....5 C834	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
.....5 C851	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C852	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
.....5 C853	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
.....5 C854	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
.....5 C855	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
.....5 C861	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
.....5 C864	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
.....5 C871	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
.....5 C872	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
.....5 C874	2201-000551	C-CERAMIC,DISC;0.47nF,10%,1kV,Y5P,TP,6.3	
.....5 C877	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
⚠ 5 D834	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
⚠ 5 D843	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
⚠ 5 D851	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
⚠ 5 D853	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 DZ858	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
.....5 EL01	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL02	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL03	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL04	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL05	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL06	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL09	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL10	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL15	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL18	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL22	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EL25	AA60-40011B	EYELET;ID2.2,OD3.2,BSP	S.N.A
.....5 EY01	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY05	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY06	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY100	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY101	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY104	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY107	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY108	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY109	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY110	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY111	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY112	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY113	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY114	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY115	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY116	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY138	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY139	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY140	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY141	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY142	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY143	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY158	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY159	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY163	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY164	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY165	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY166	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY167	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY168	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY170	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY171	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY172	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY173	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY174	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY175	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY176	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY177	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY178	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY179	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY180	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY181	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY182	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY183	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY184	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY185	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY186	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY187	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY188	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY189	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
.....5 EY190	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY191	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY192	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY193	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY71	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY72	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY79	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY80	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY81	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY82	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY83	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY84	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY85	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY86	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY87	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY88	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY89	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY90	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY91	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY92	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY93	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY94	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY95	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 EY99	AA60-40011A	EYELET;ID2.0,OD2.8,BST	S.N.A
.....5 F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
.....5 F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
.....5 F802A	3602-000114	FUSE-HOLDER;-,-,30mohm	
.....5 F802B	3602-000114	FUSE-HOLDER;-,-,30mohm	
.....5 F804A	3602-000114	FUSE-HOLDER;-,-,30mohm	
.....5 F804B	3602-000114	FUSE-HOLDER;-,-,30mohm	
.....5 F855A	3602-000114	FUSE-HOLDER;-,-,30mohm	
.....5 F855B	3602-000114	FUSE-HOLDER;-,-,30mohm	
⚠ 5 FD805S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 5 FD806S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
⚠ 5 FD854S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 5 FD871S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
.....5 GT801	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT802	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT810	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT811	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT812	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT813	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT814	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 L806	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L807	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L808	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L810	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L811	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L812	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L813	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L814	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L815	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L816	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L831	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L832	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 L851	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L857	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 L859	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 PCB	AA41-00342A	PCB-POWER;PCL545R,CEM-1,1L,A,1.6T,330X24	S.N.A
.....5 Q801	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 R808	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R808A	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R812	2003-002170	R-METAL OXIDE(S);15Kohm,5%,2W,AG,TP,3.9x	
.....5 R814	2003-002170	R-METAL OXIDE(S);15Kohm,5%,2W,AG,TP,3.9x	
.....5 R815	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
.....5 R815A	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
.....5 R832	2001-001178	R-CARBON(S);680OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R834	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R837	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R838	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R855	2001-001196	R-CARBON(S);9.1KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R871	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R872	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R873	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
.....5 R874	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R875	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
⚠ 5 RP801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 5 RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 5 RY801S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 5 VP801S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
⚠ 5 VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
....4	AA39-20009B	LEAD CONNECTOR-ASSY;,1P,YFH800-01,300,16	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	AA92-03970D	ASSY P/MATERIAL-PCB;PJTJ52A NO-T/BOARD	S.N.A
....4 CHASIS	AA69-01403A	WRAP VINYL-PACKING;SKD CHASSIS,LDPE,T0.0	S.N.A
....4 CHASIS	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A

ASSY COVER REAR

Loc. No.	Code No.	Description ; Specification	Remark
1 *	AA90-02622C	ASSY COVER REAR;55W3,HCM5525W3S/XAA	S.N.A
..2	AA64-02225C	CABINET-BACK,SIDE;DP,47.55W3,HIPS V0,BLK	
...3	AA64-02065C	CABINET-BACK,SIDE;47.55W3,HIPS V0,BLK	S.N.A
..2	AA67-00200A	SCREEN-TINT;55W,1249*710,T=0.7,P=0.52	
..2	BP64-00030A	CABINET-BACK,TOP;DP,55W3,BP64-00014A	
...3	BP64-00014A	CABINET BACK-TOP;55W3,PS SHEET,T4.0	
...3	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
..2	AA64-01395L	INLAY-TERMINAL;J9,PS SHEET,T0.5,-,-,BLK,	S.N.A
..2	AA67-00124B	SCREEN-FRESNEL;55W,-,T2,1251*712,-,-,-,-	
..2	AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	S.N.A
..2	AA64-01849C	CABINET-BACK,BOT;DP,62J8,VO,AA64-01384B	
...3	AA64-01384B	CABINET-BACK,BOT;43,54,62J8,HIPS,-,-,-,V	
....4	0103-000161	RESIN-HIPS;BASFK456M,BLK,-,V0	S.N.A

ASSY COVER FRONT

Loc. No.	Code No.	Description ; Specification	Remark
1 *	AA90-02621D	ASSY COVER FRONT;55W3,HCM5525W3S/XAA	S.N.A
..2 AP+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2 ASP+CW	6005-001004	SCREW-WOOD;HH,+,M4,L27,BLK,SWRCH18A	S.N.A
..2 BCM+CW	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL)	S.N.A
..2 BF+BM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2 BM+CW	6005-001004	SCREW-WOOD;HH,+,M4,L27,BLK,SWRCH18A	S.N.A
..2 CBB+AP	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	S.N.A
..2 CBB+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2 CBB+EJ	6003-001022	SCREW-TAPTITE;RH,+,B,M3,L12,ZPC(BLK),SWR	S.N.A
..2 CBS+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2 CBT+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2 CFB+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2 CFWTOP	AA63-60131A	SPACER-FELT;SVP403J,FELT,-,-,-,BLK,T0.5,	S.N.A
..2 CMV+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2 CMW+CW	6005-001004	SCREW-WOOD;HH,+,M4,L27,BLK,SWRCH18A	S.N.A
..2 FP+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2 HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2 HM+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2 HV+BCM	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2 PCB+CF	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	AA98-00288E	ASSY K/D-CABINET,WOOD;HCM5525W3S/XAA,55	S.N.A
...3 B-FRAM	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 BF+WOO	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 CAS+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 HCM+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 HCW+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 HW+CW	AA60-10051B	SCREW-WOOD;-,SWRCH18A,M3.5,L11,RH,+,-,-,	S.N.A
...3 RAIL+R	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3 SPK+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3	AA63-60126E	SPACER-FELT;,FELT,BLK,T2,275X15	S.N.A
...3	AA63-60126F	SPACER-FELT;,FELT,BLK,T2,310X15	S.N.A
...3	AA63-60126G	SPACER-FELT;,FELT,BLK,T2,712X15	S.N.A
...3	AA64-02208D	CABINET-WOOD;55W3HD,WOOD,MIJU	S.N.A
...3	AA61-01070A	HOLDER-CABINET,BOT(D);W3,ABS HB,L990,BLK	S.N.A
...3	AA61-10247A	BRACKET-FOCUS;S46DS,SECC,T1.0,-,-,-,-	S.N.A
...3	AA61-20219A	HOLDER-FRONT,BOT,E;,ABS,HB,L40,BLK	S.N.A
...3	AA63-00384A	COVER-DUCT;DP 54J8,-,-,-,-,HB,-,AA63-003	S.N.A
....4	AA63-00348B	COVER-DUCT;54,62J8,HIPS,-,-,-,HB,BLK,-	S.N.A
...3	AA65-00017A	CLAMPER CORE-WIRE;ALL MODEL,NYLON6.6,BLK	S.N.A
...3	BP61-00087B	RAIL-DOOR,L;W3,ABS HB,BLK	S.N.A
...3	BP61-00087A	RAIL-DOOR,R;W3,ABS HB,BLK	S.N.A
...3	AA61-01117B	HOLDER-SENSOR;W3,PC VIOLET	S.N.A
...3	AA61-00792B	HOLDER-SENSOR;W3,PC VIOLET	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
...3	BP61-00075A	HOLDER-JERSEY,ASSY;W3,ABS V0,GRAY,63-000	S.N.A
....4	AA63-00099C	SPACER-FELT;47W3,FELT,BLK,T0.35,30*30	S.N.A
....4	AA61-00508D	HOLDER-JERSEY;W3,ABS V0,GRAY,G4309	S.N.A
...3	AA61-00508D	HOLDER-JERSEY;W3,ABS V0,GRAY,G4309	S.N.A
...3	AA91-00750A	ASSY-MAGNET,PUSH;,MAGNET,W3	
...3	AA61-00507B	HOLDER-CABINET,WOOD;43,54,62J8,ABS,-,-,-	S.N.A
...3	AA61-00458B	CASTER;-,TP4020-05 PLY,-,OH56,-,-,SR44.4	S.N.A
...3	AA61-00097A	HOLDER-WIRE;-,NYLON 6/6,-,-,-,NTR,-	S.N.A
...3	AA61-00094C	HOLDER-RAIL;PCJ533R,ABS,-,-,-,BLK,HB,480	S.N.A
...3	AA60-10050Y	SCREW-WOOD;-,SWRCH18A,M4,L40,FH,+,-,-,ZP	S.N.A
...3	AA60-00078B	SPACER-DUAL,LOCK;W3,#250,19*40	S.N.A
...3	6005-001006	SCREW-WOOD;FH,+,M3,L15.0,ZPC(BLK),SWRCH1	
...3	AA61-00616B	HOLDER-CRT,MAIN;54J7,DP,-,-,-,-,AA61-005	S.N.A
....4	AA61-00506B	HOLDER-CRT,MAIN;43,54,62J8,HIPS,-,-,-,BL	S.N.A
...3	AA61-01067A	HOLDER-CABINET,BOT(A);W3,ABS HB,L40,BLK,	S.N.A
...3	AA61-00999A	HOLDER-DUAL,LOCK;W3,W1,ABS HB,BLK	S.N.A
...3	AA61-00973C	HOLDER-SCREEN,L;55W3,ABS HB,BLK	S.N.A
...3	AA61-00971C	HOLDER-SCREEN,TB;55W3,ABS HB,L1282,BLK	S.N.A
...3	AA61-00858B	BRACKET-FRAME;W3,SECC,T2.0	S.N.A
...3	AA61-00857B	BRACKET-NUT,INSERT;W3,M3 ZN	S.N.A
...3	AA61-00723A	HOLDER-PIN,DABO;PRJT,WOODEN NAIL,OD6XL20	S.N.A
...3	AA61-00722A	HOLDER-PIN,DABO;PRJT,NYLON,OD6.5XL25,-,-	S.N.A
..2	AA67-00206A	MIRROR-FRONT;55W9,FSM,1027*799*540	
..2	BP61-00034A	BRACKET-MIRROR(BOT);DP,55W3,61-01093A	
...3	AA61-01093A	BRACKET-MIRROR,BOT;55W9,SECC,T1.0	S.N.A
..2	AA63-00021M	SPACER-MIRROR,BOT;50J6,PVC HB,L799,BLK	S.N.A
..2	BP61-00033A	BRACKET-MIRROR(TOP);DP,55W3,61-01092A	
...3	AA61-01092A	BRACKET-MIRROR,TOP;55W9,SECC,T1.0,BLK	S.N.A
..2	BP61-00032A	BRACKET-F/MIRROR(L);DP,55W3,61-01091A	
...3	AA61-01091A	BRACKET-FRAME,MIRROR L;55W9,SECC,T1.6,BL	S.N.A
..2	BP61-00031A	BRACKET-F/MIRROR(R);DP,55W3,61-01090A	
...3	AA61-01090A	BRACKET-FRAME,MIRROR R;55W9,SECC,T1.6,BL	S.N.A
..2	AA63-00380A	COVER-CORNER;PJT,POLYESTER,-,-,-,-,CLR,#	S.N.A
..2	AA63-60002V	SPACER-FELT;-,FELT,-,-,-,BLK,T0.3,-,60X4	S.N.A
..2	AA64-02213D	BADGE-BRAND;80MM,AL FORGING,BL903P,SAMSU	
..2	AA63-00063A	SPACER-DUAL,LOCK;SVP-614J,#400,-,-,-,-,-	S.N.A
..2	AA91-00843C	ASSY-C/FRONT,MASK;DP,64-02059F,55W3	S.N.A
...3	AA63-00380A	COVER-CORNER;PJT,POLYESTER,-,-,-,-,CLR,#	S.N.A
...3	AA63-00063A	SPACER-DUAL,LOCK;SVP-614J,#400,-,-,-,-,-	S.N.A
...3	AA64-02059F	CABINET-FRONT,MASK;55W3,HIPS HB,GRAY,BL9	
...3	AA64-02213D	BADGE-BRAND;80MM,AL FORGING,BL903P,SAMSU	
..2	AA61-00859B	PLATE-CENTER;W3,WOOD,T12,MDF	
..2	AA98-01748A	ASSY K/D-SPEAKER;HCM5525W3S/XAA,P54A,	
...3	AA39-00287B	LEAD CONNECTOR-ASSY;PCL54RX,UL2547#26,UL	
...3	AA98-00049B	ASSY-LEAD,CON;-,LEAD-CON,CORE,AA39-20505	S.N.A
....4	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	AA39-00086A	LEAD CONNECTOR-ASSY;,2.2UF,REC,REC,200MM	
...3	3001-001116	SPEAKER;30W,8ohm,96dB,60Hz	
...3	3001-000153	SPEAKER;20W,8ohm,93dB,1.3KHz	
..2	AA67-00132A	SUN SCREEN-AG;55W,-,T=82%,1251*712*2,-,-	
..2	AA64-60449B	INLAY-COVER;SP-434JMF,PS,T0.5,149.3X69.5	S.N.A
..2	AA64-60421C	INLAY-COVER;-,PS,T0.3,-,-,BLK,SEA	S.N.A
..2	AA61-00617B	BRACKET-CRT,MAIN;DP,54J7,AA61-00475B	S.N.A
...3	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
...3	AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,-,-,-,-	S.N.A
..2	AA60-00072B	SPACER-COVER,DUST;43,54,62J9,SPONGE 94HF	S.N.A
..2	6001-000137	SCREW-MACHINE;BH,+,M3,L8,ZPC(YEL),SM20C,	S.N.A
..2	AA63-00021L	SPACER-MIRROR,TOP;50J6,PVC HB,BLK,L1020	S.N.A
..2	AA63-00021K	SPACER-MIRROR;50J6,PVC,BLK,HB L500	S.N.A
..2	AA91-00842H	ASSY-C/FRONT,BOT;DP,64-02064L MIJU,55,65	
...3	AA64-02080C	KNOB POWER;W3,ABS HB,BLK,BL903	
...3	AA64-02081B	KNOB-CH,VOL;W3,ABS HB,BLK,CHROME,GLOSSY	
...3	AA64-02082B	WINDOW-RMC,LED;W3,PC,CLEAR	
...3	AA64-02205C	BADGE-DECORATION;W3,NI+AL FORGING+NI,DG7	S.N.A
...3	AA64-02064L	CABINET-FRONT,BOT;55,65W3,HIPS V0,GRAY,B	
...3	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
...3	AA61-00785B	GUIDE-KNOB,POWER;W3,ABS HB ,BLK,CHROME,G	S.N.A
...3	AA61-00786C	HOLDER-CONTROL;W3,ABS HB,BLK,BL903	S.N.A
...3	AA61-00791B	HOLDER-FRONT,BOT;W3,ABS HB,L40,BLK,DO	S.N.A
...3	AA61-01068A	HOLDER-CABINET,BOT(B);W3,ABS HB,L40,BLK,	S.N.A
...3	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,	S.N.A
..2	AA61-00972C	HOLDER-SCREEN,R;55W3,ABS HB,BLK	S.N.A
..2	AA64-02074B	INLAY-SPEAKER;J7,J8,J9,PS SHEET,T0.5,-,-	S.N.A
..2	AA91-00774H	ASSY-DOOR,RACK;DP,W3,HB GRAY,02066H	
...3 AHD+DR	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	S.N.A
...3 DR+BD	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	S.N.A
...3	AA91-00758A	ASSY-HINGE,DOOR(R);SPRING,SECC T1.6 W3,W	
...3	AA73-00007B	RUBBER-CAP;W3,MBR,GRAY,60	S.N.A
...3	AA64-02206B	WINDOW-DOOR;W3,GLASS,T3.0,BR	
...3	AA61-00782B	BRACKET-MAGNET;W3,SPC,T2.0,FZW	S.N.A
...3	AA61-00856B	BRACKET-DOOR;47W3,SECC,T1.0,BLK	S.N.A
...3	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
...3	AA64-02066H	DOOR-RACK;47.55.65W3,HIPS HB,GRAY,BL903P	
..2	AA73-00005B	RUBBER-CAP;FLAT,PRJ,SILICONE RUBBER,WHIT	S.N.A

ASSY K/D-SKD P/MATERIAL

Loc. No.	Code No.	Description ; Specification	Remark
1 *	AA98-01629A	ASSY K/D-SKD P/MATERIAL;SKD FORMAT-3	S.N.A
..2 WOODEN	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
..2	AA60-40006A	PIN-STAPLE;33X17.8X2.4,H18,33X17.8X2.4	S.N.A
..2	AA69-90001A	CHEMICALS-SILICAGEL;-,-,-,-,-,-,M2,5GR,-,-	S.N.A

ASSY P/MATERIAL

Loc. No.	Code No.	Description ; Specification	Remark
1 *	AA92-04017B	ASSY P/MATERIAL;HCM553W3S/XAA	
..2	AA61-00049B	HOLDER-BOX;-,PP,-,-,-,NTR,V0,AA61-20285A	S.N.A
...3	AA61-20285A	HOLDER-BOX;3456,PP,-,-,-,WHT,VO	S.N.A
..2	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A

ASSY SKD

Loc. No.	Code No.	Description ; Specification	Remark
1 *	AA92-05191A	ASSY SKD PART;1, , ,	S.N.A
..2 D/B	AA26-00101A	TRANS FBT;FWZ50A001E/FFA97513B,12KV,5P,-	
..2	AA65-30104B	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
⚠ ..2	AA96-00156D	ASSY POWER CORD;-,EP2/YES(US),H/C 200MM,	S.N.A
...3	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	AA63-10002B	BAND-TIE;NYLON66 V2,L140,NTR	S.N.A
...3	AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	S.N.A
...3	AA39-10007Y	CBF POWER CORD;-,EP2/YES,SPT-2 18AWGx2C,	
...3	3811-000401	WIRE-PVC CU;BCWA,300V,ROLL,17/0.16mm,#22	S.N.A
..2	AA39-20577B	LEAD CONNECTOR-ASSY;P54A/SVP-55W3HD,UL16	
..2	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2	AA26-30006F	TRANS FBT;-,FWZ-50A001C,55',30KV	
..2	AA59-00218A	MODULE;SVP-5200,F301-P03,BK	
..2	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
..2	AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-,	S.N.A

ASSY CPT

Loc. No.	Code No.	Description ; Specification	Remark
1 *	AA91-03840A	ASSY CPT;HCL552W3S/XAA	S.N.A
..2	AA98-00294N	ASSY K/D-CRT,B;P16LSG03BMB,+380MG,DELTA	S.N.A
...3 BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3	AA61-00847A	CASE-COUPLER,B;DP,PROJ,AA61-00808B	S.N.A
....4	AA61-00808B	CASE-COUPLER,B;PROJ,ALDC,T8,BLK	S.N.A
....4	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
...3	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	S.N.A
...3	AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3	AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3	BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
...3	AA91-00735B	ASSY-BRKT,CRT;DP,AA91-00722A,PROJ	
....4	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
.....5	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
.....5	AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
.....5	AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3	AA67-00156A	LENS;,DELTA 240,CLEAR,C-ELEMENT	
...3	AA67-00146A	LENS-ASSY;,DELTA 260,CLEAR A/B	
...3	AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3	AA27-00151A	DEFLECTION YOKE;-,CDY-PT0702(X),PRT,P16L	
⚠ ...3	AA03-00202A	CRT MONO;P16LSG03BMB,FREE,3.30mH,2.20mH,	
...3	AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3	AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3	AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	


Loc. No.		Code No.	Description ; Specification	Remark
...3		AA33-00008A	MAGNET CONVERGENCE;JH92LTU-36A,7inchPRT,	
..2		AA98-00295M	ASSY K/D-CRT,G;P16LSG03HKA,+380MG,DELTA	S.N.A
...3	BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3		AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3		AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3		AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	S.N.A
...3		AA61-00846A	CASE-COUPLER,G;DP,PROJ,AA61-00807B	S.N.A
....4		AA61-00807B	CASE-COUPLER,G;PROJ,ALDC,T8,BLK	S.N.A
....4		AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
...3		AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3		AA67-00146A	LENS-ASSY;,DELTA 260,CLEAR A/B	
...3		AA67-00158A	LENS;,DELTA 240,GREEN,C-ELEMENT	
...3		AA91-00735B	ASSY-BRKT,CRT;DP,AA91-00722A,PROJ	
....4		AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
.....5		AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
.....5		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
.....5		AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3		BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
⚠ ...3		AA03-00201A	CRT MONO;P16LSG03HKA,FREE,3.30mH,2.20mH,	
...3		AA27-00151A	DEFLECTION YOKE;-,CDY-PT0702(X),PRT,P16L	
...3		AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3		AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3		AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3		AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
..2		AA98-00297N	ASSY K/D-CRT,R;P16LSG03RJA,+380MG,DELTA2	S.N.A
...3	BC+AL	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3		AA61-00845A	CASE-COUPLER,R;DP,PROJ,AA61-00806B	S.N.A
....4		AA61-00806B	CASE-COUPLER,R;PROJ,ALDC,T8,BLK	S.N.A
....4		AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
...3		AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	S.N.A
...3		AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3		AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3		BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
...3		AA91-00735B	ASSY-BRKT,CRT;DP,AA91-00722A,PROJ	
....4		AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
.....5		AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
.....5		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
.....5		AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3		AA67-00157A	LENS;,DELTA 240,RED,C-ELEMENT	
...3		AA67-00146A	LENS-ASSY;,DELTA 260,CLEAR A/B	
...3		AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3		AA27-00151A	DEFLECTION YOKE;-,CDY-PT0702(X),PRT,P16L	
⚠ ...3		AA03-00200A	CRT MONO;P16LSG03RJA,FREE,3.30mH,2.20mH,	
...3		AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3		AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3		AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3		AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3		AA33-00008A	MAGNET CONVERGENCE;JH92LTU-36A,7inchPRT,	

ASSY ACCESSORY


Loc. No.		Code No.	Description ; Specification	Remark
1	*	AA92-04025A	ASSY ACCESSORY;HCM5525W3S/XAA,P54A	S.N.A
..2		AA68-00371C	CARD WARRANTY-01;,SEA,W/P100(G),1 YEAR	S.N.A
..2		AA68-40065B	CARD-REGISTRATION;,SEA,A5,ENG,A/P220,2P(	S.N.A
..2		AA68-01509D	MANUAL USERS;HCM5525/553/653,ENG,W/P100G	
..2		AA39-00006A	CABLE RCA;,3000MM	
..2		AA59-00176A	REMOCON;-,TM63,SHARK,51,L/GRAY,DO,-,-,-,	
...3		2802-000194	RESONATOR-CERAMIC;8MHz,1.0%,TP,8.5x4.5x5	
...3		AA09-00275A	IC MICOM;Z86L8808SSC-R51PX,SOP,ST,SZTM-8	
..2		AA61-20126A	HOLDER-LEG;-,ABS,-,-,-,BLK,HB	

8. Block Diagram


8-1 Main Signal(Progressive)

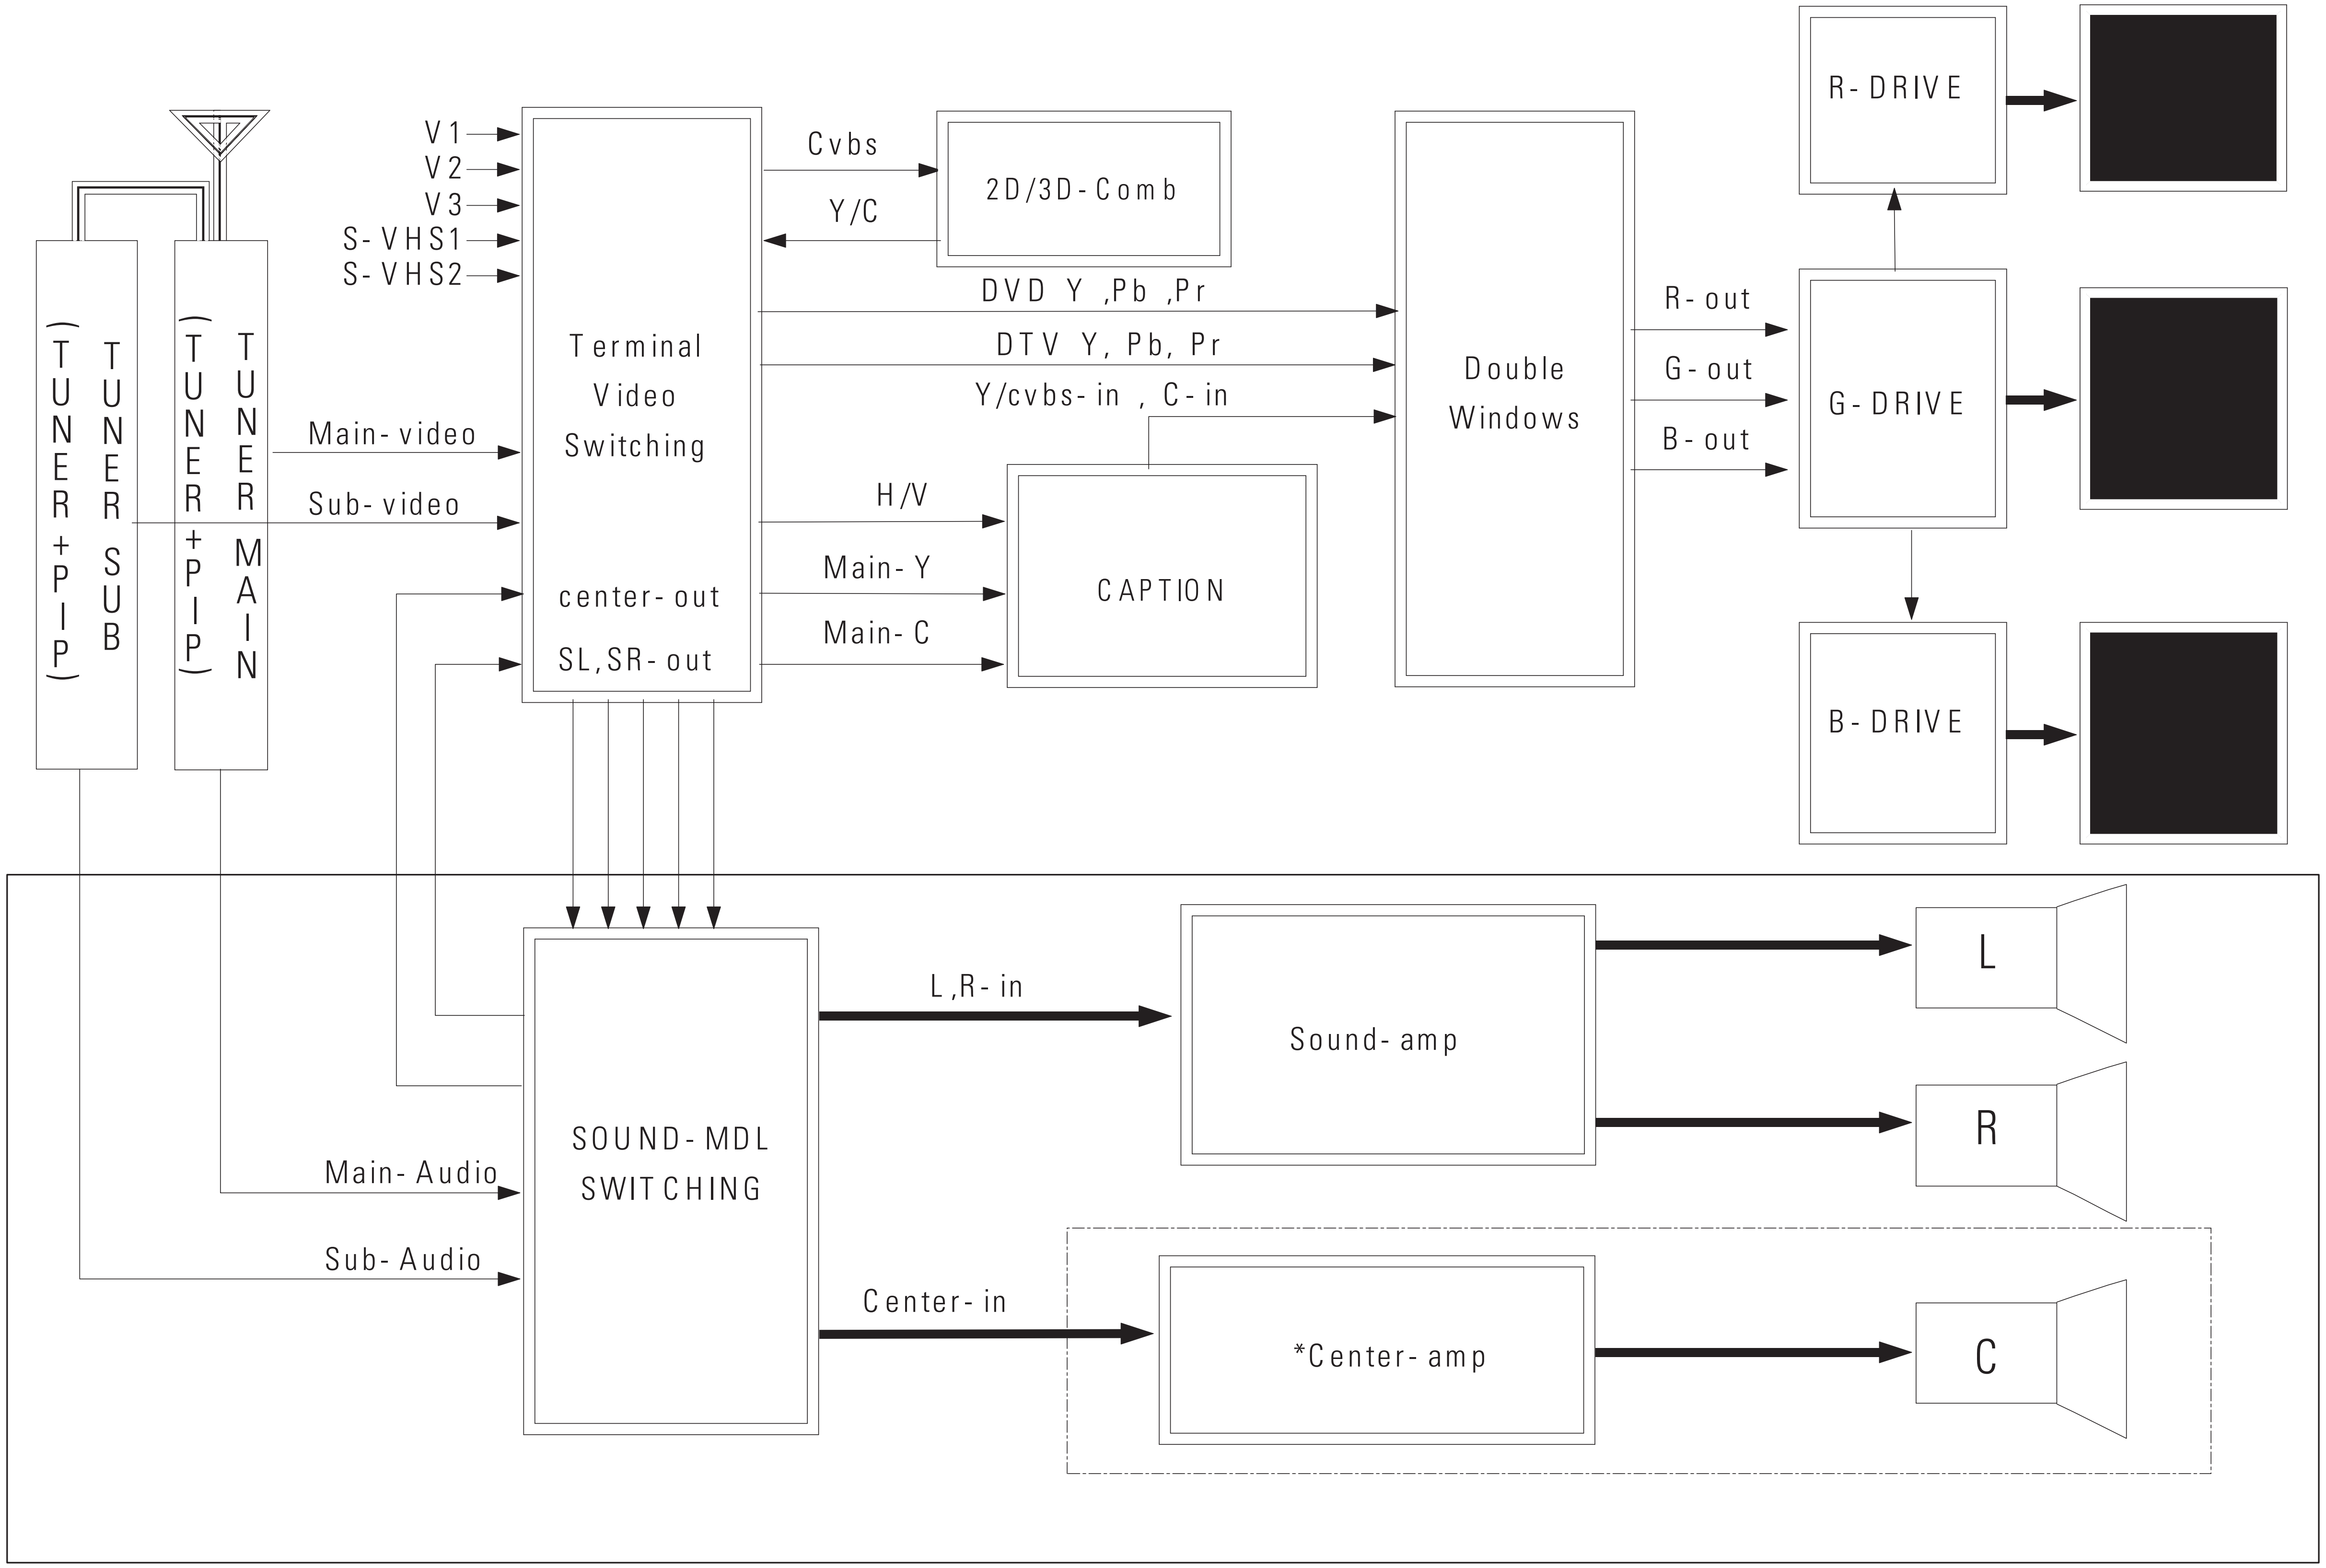


8-2 Video Signal

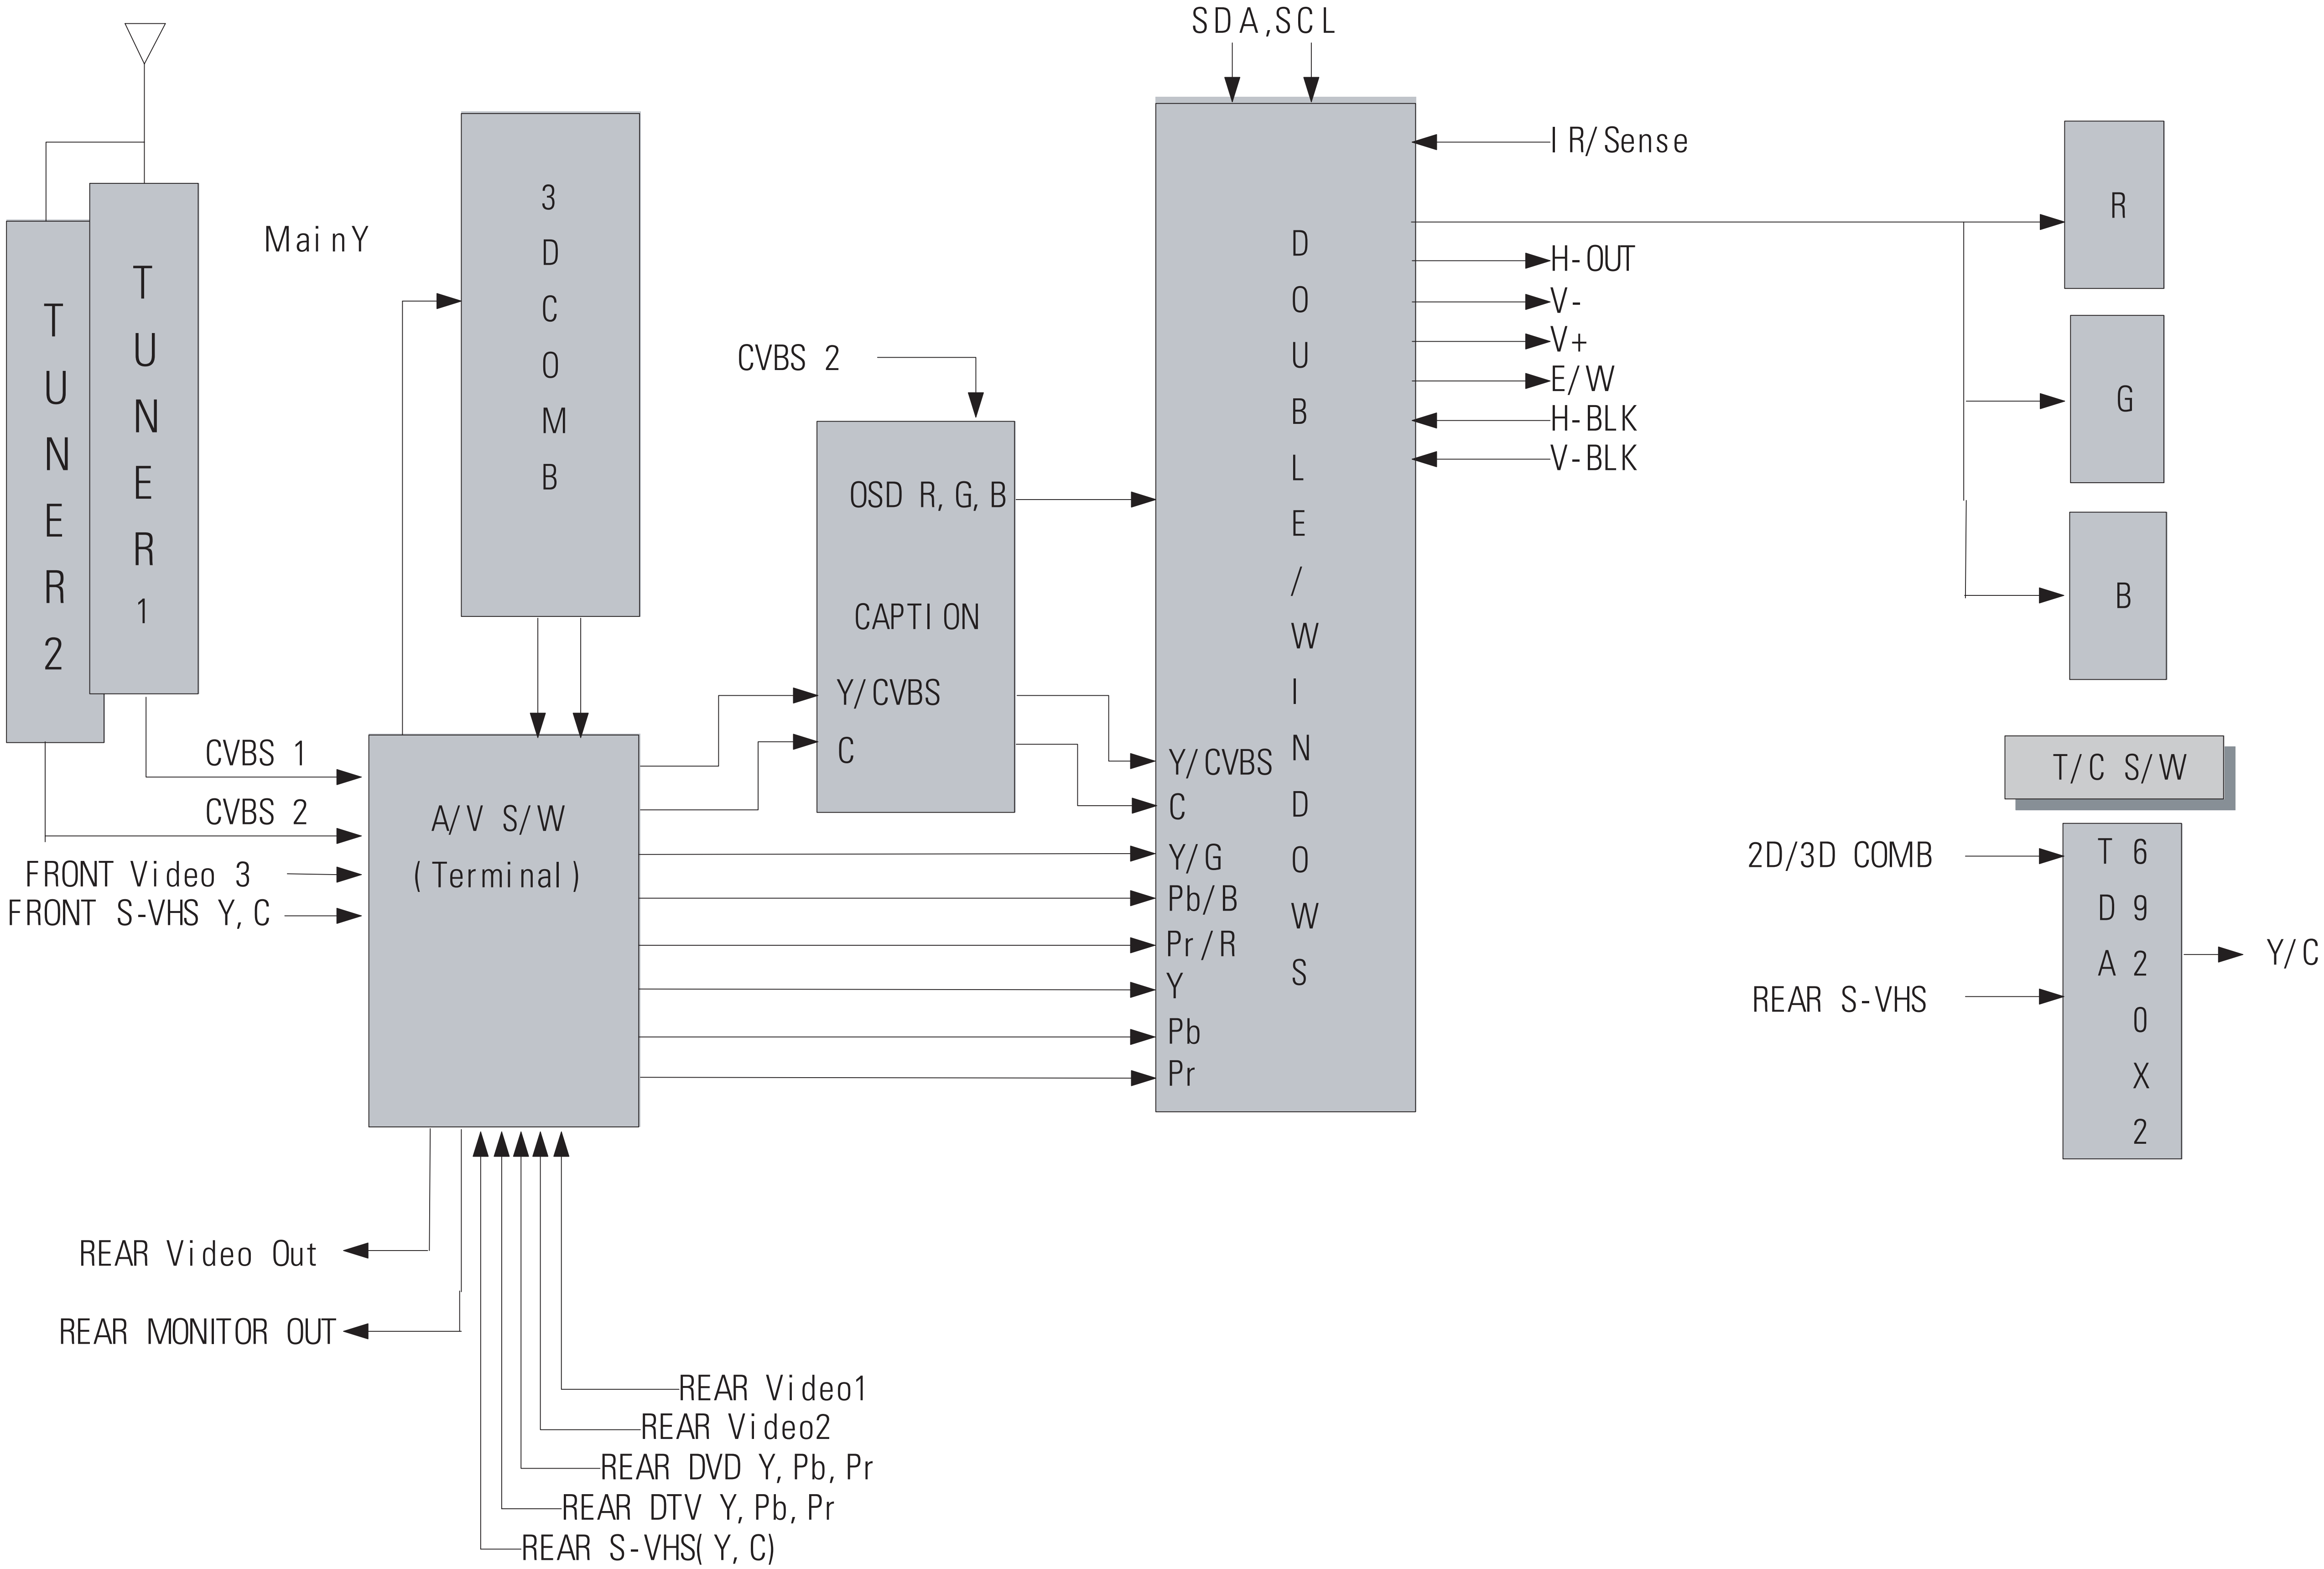


8-3 Sound Signal

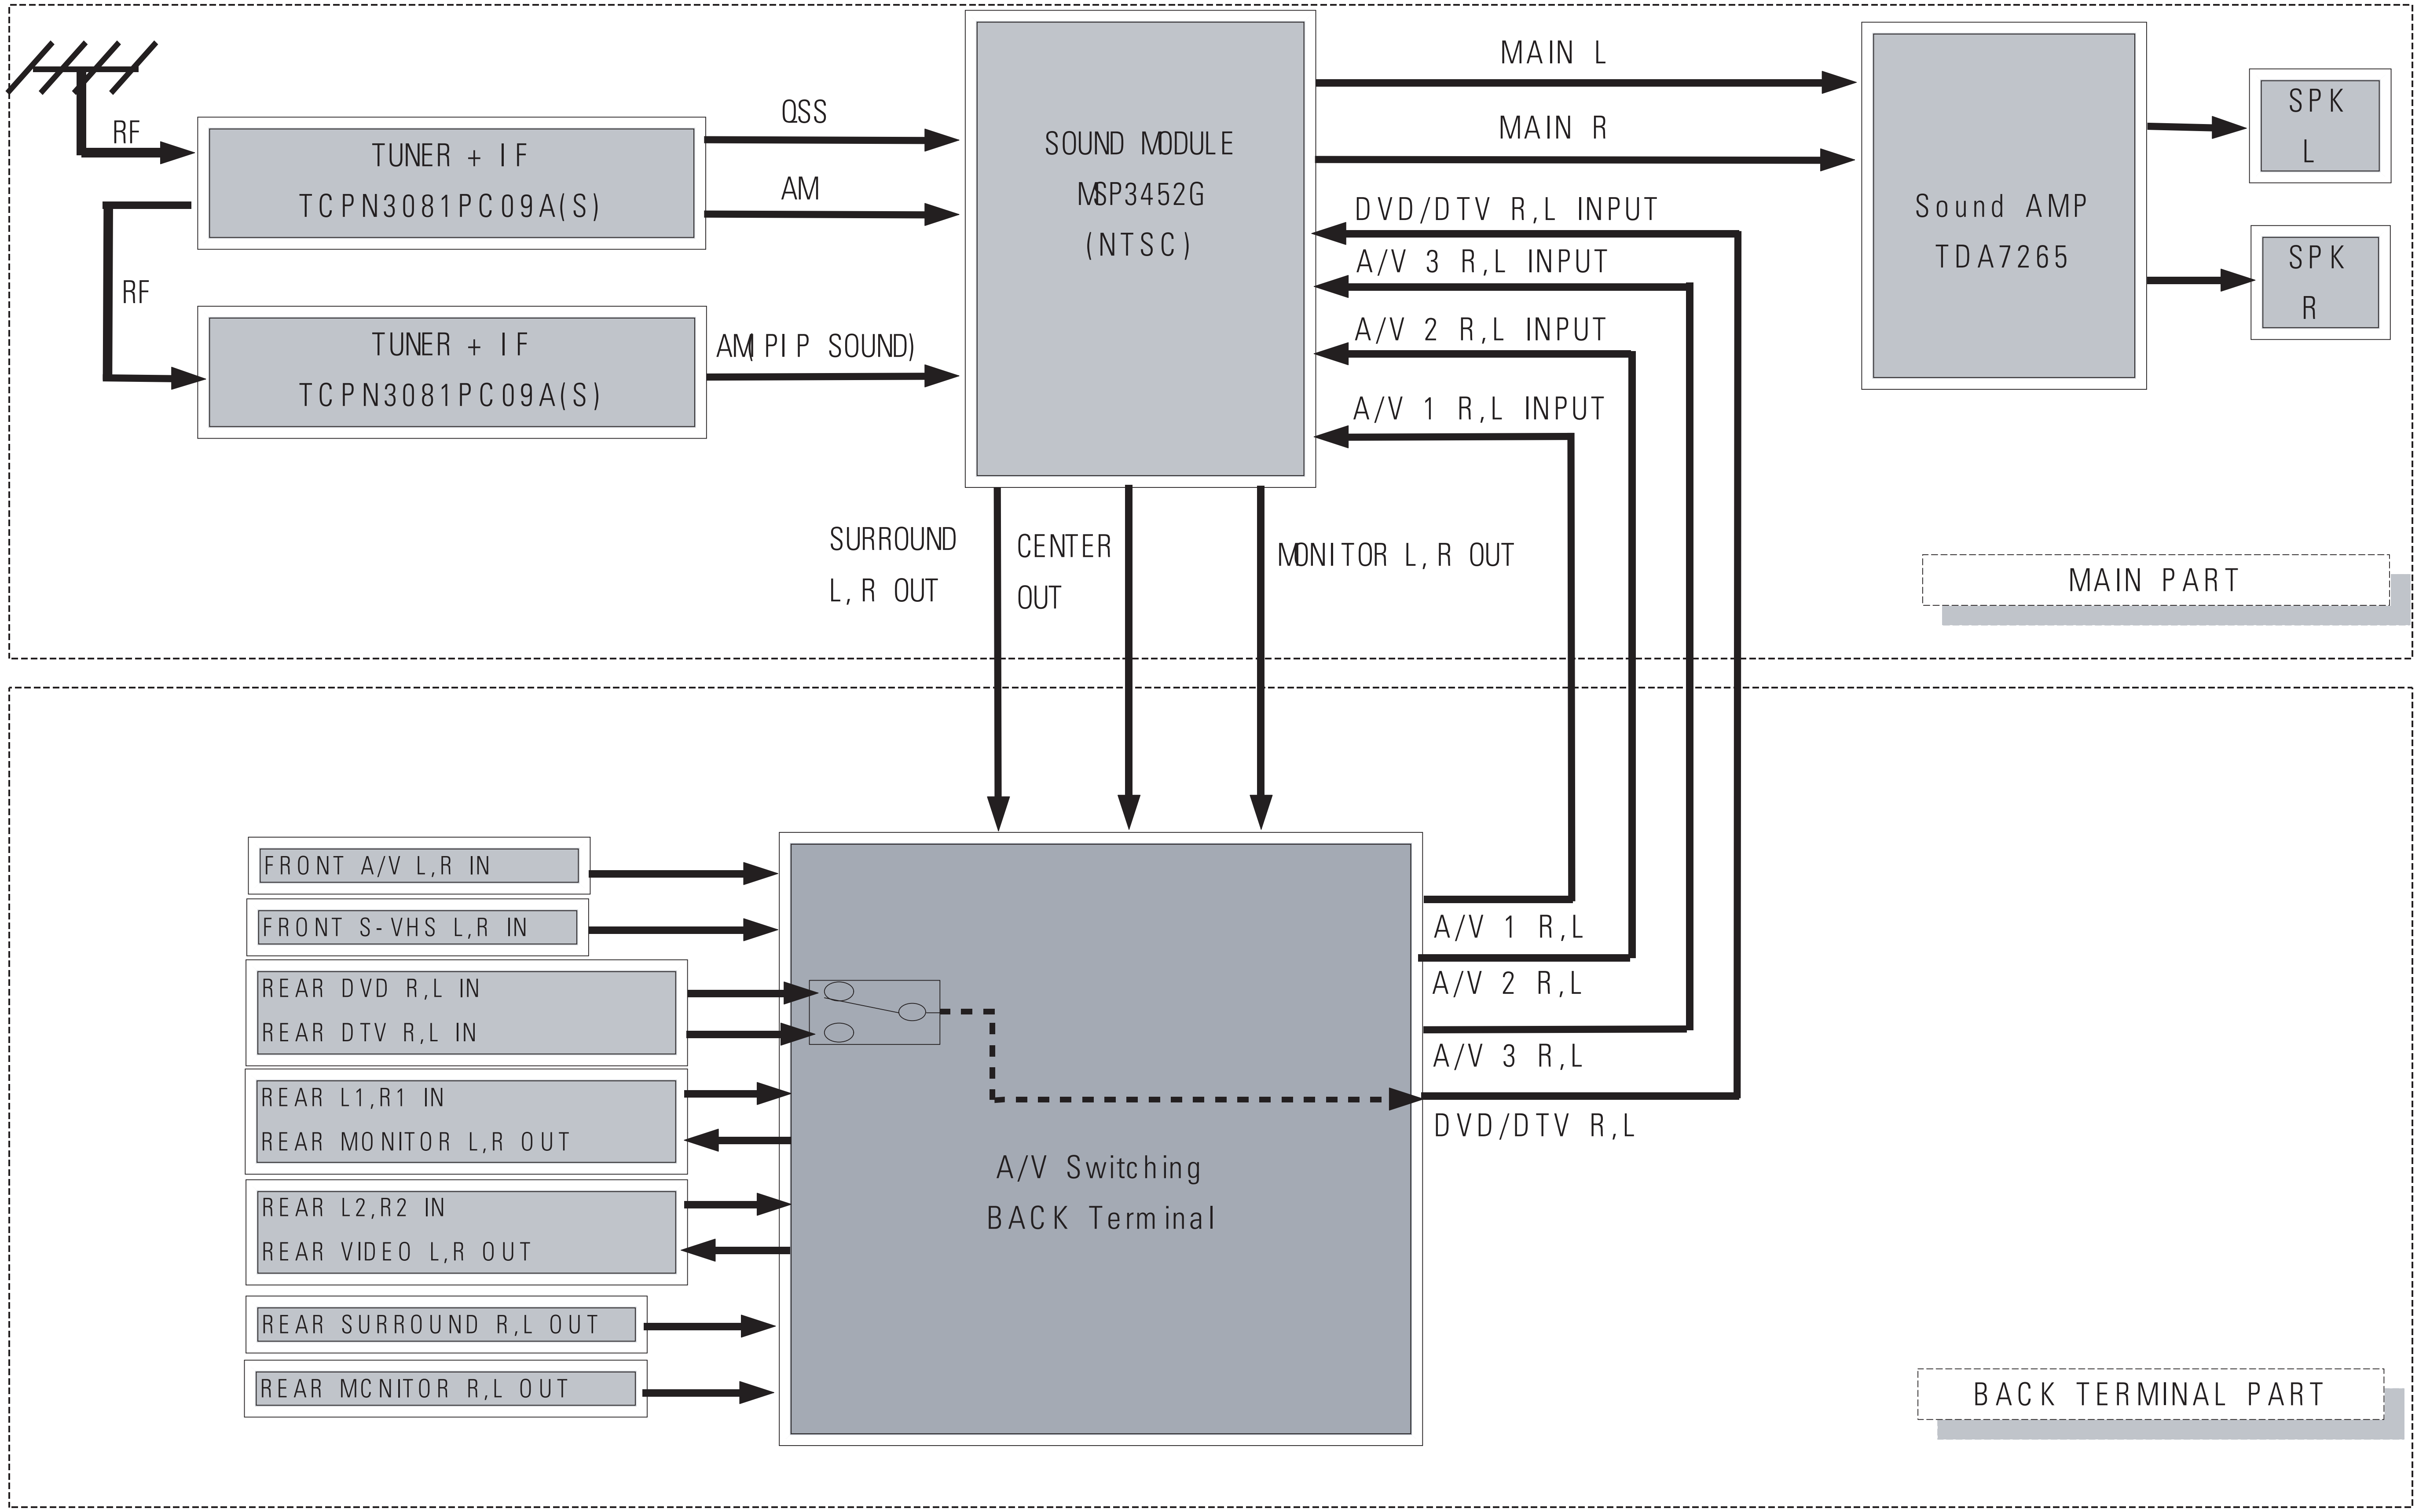


8-4 Power Supply

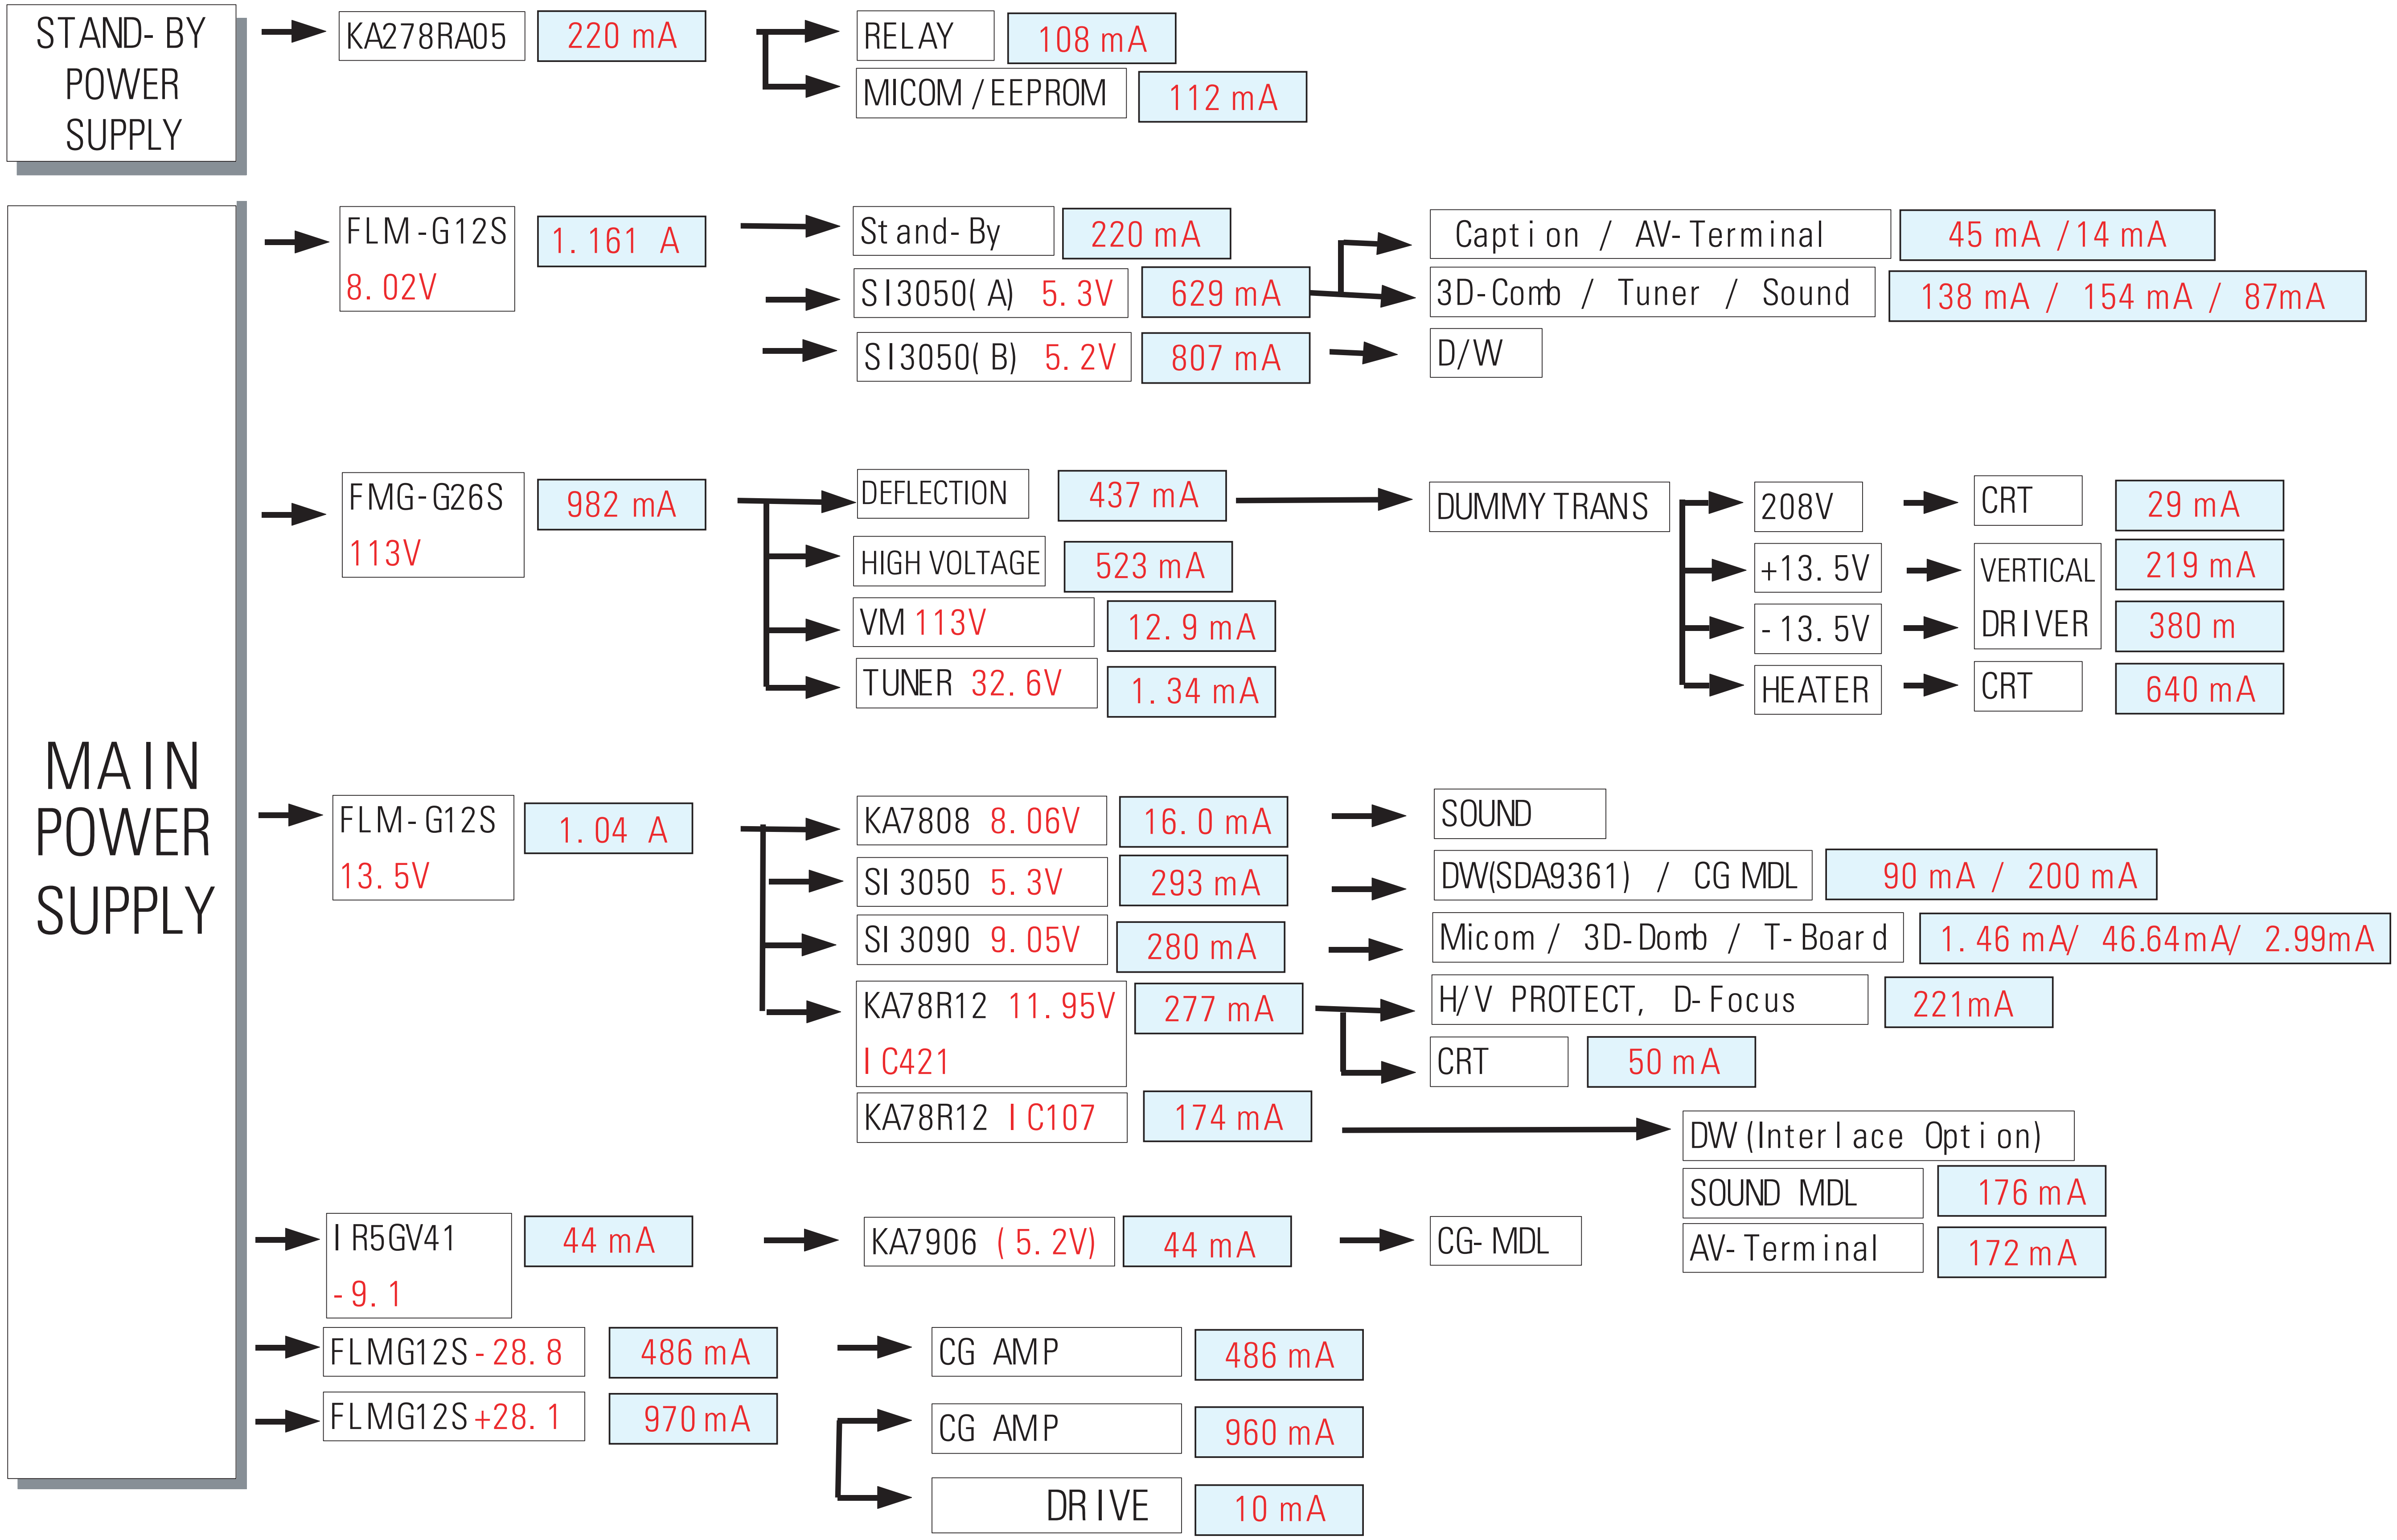


8-5 Double-Windows Block Diagram (Applied IC : SDA3230 + SDA9400)

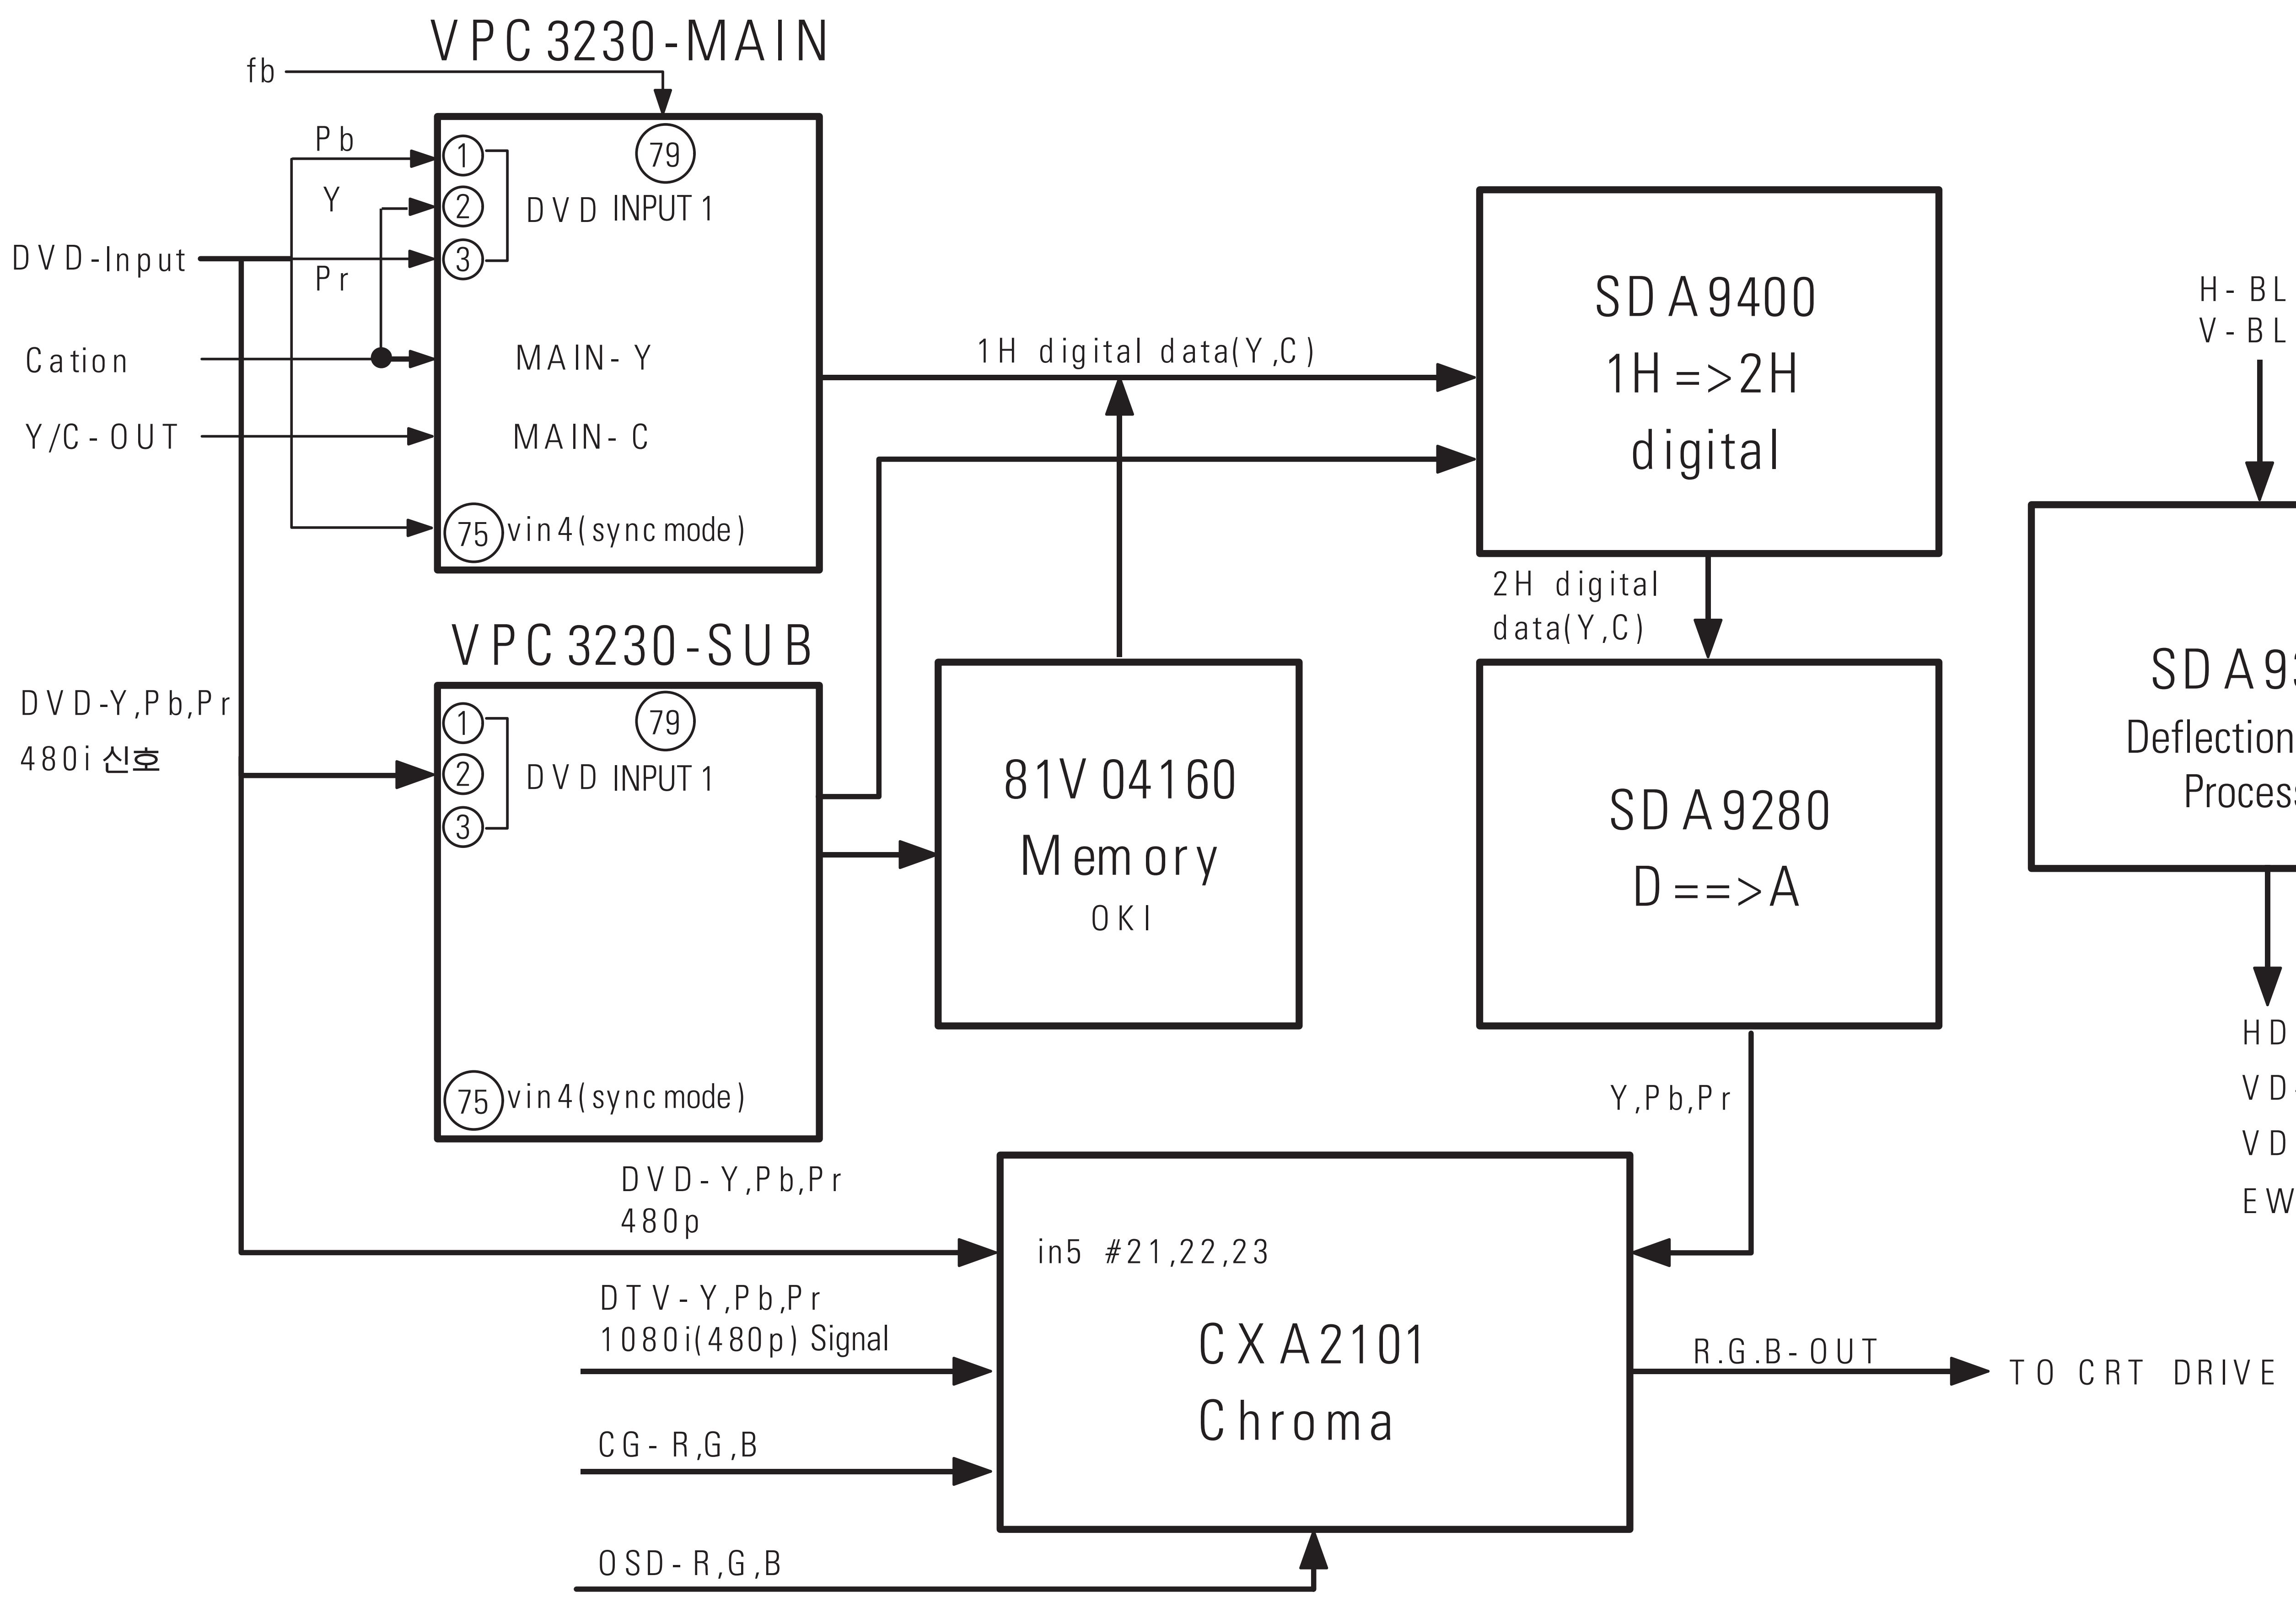

8-6 Simple PIP (Applied IC : CIA3250 + SDA9400)

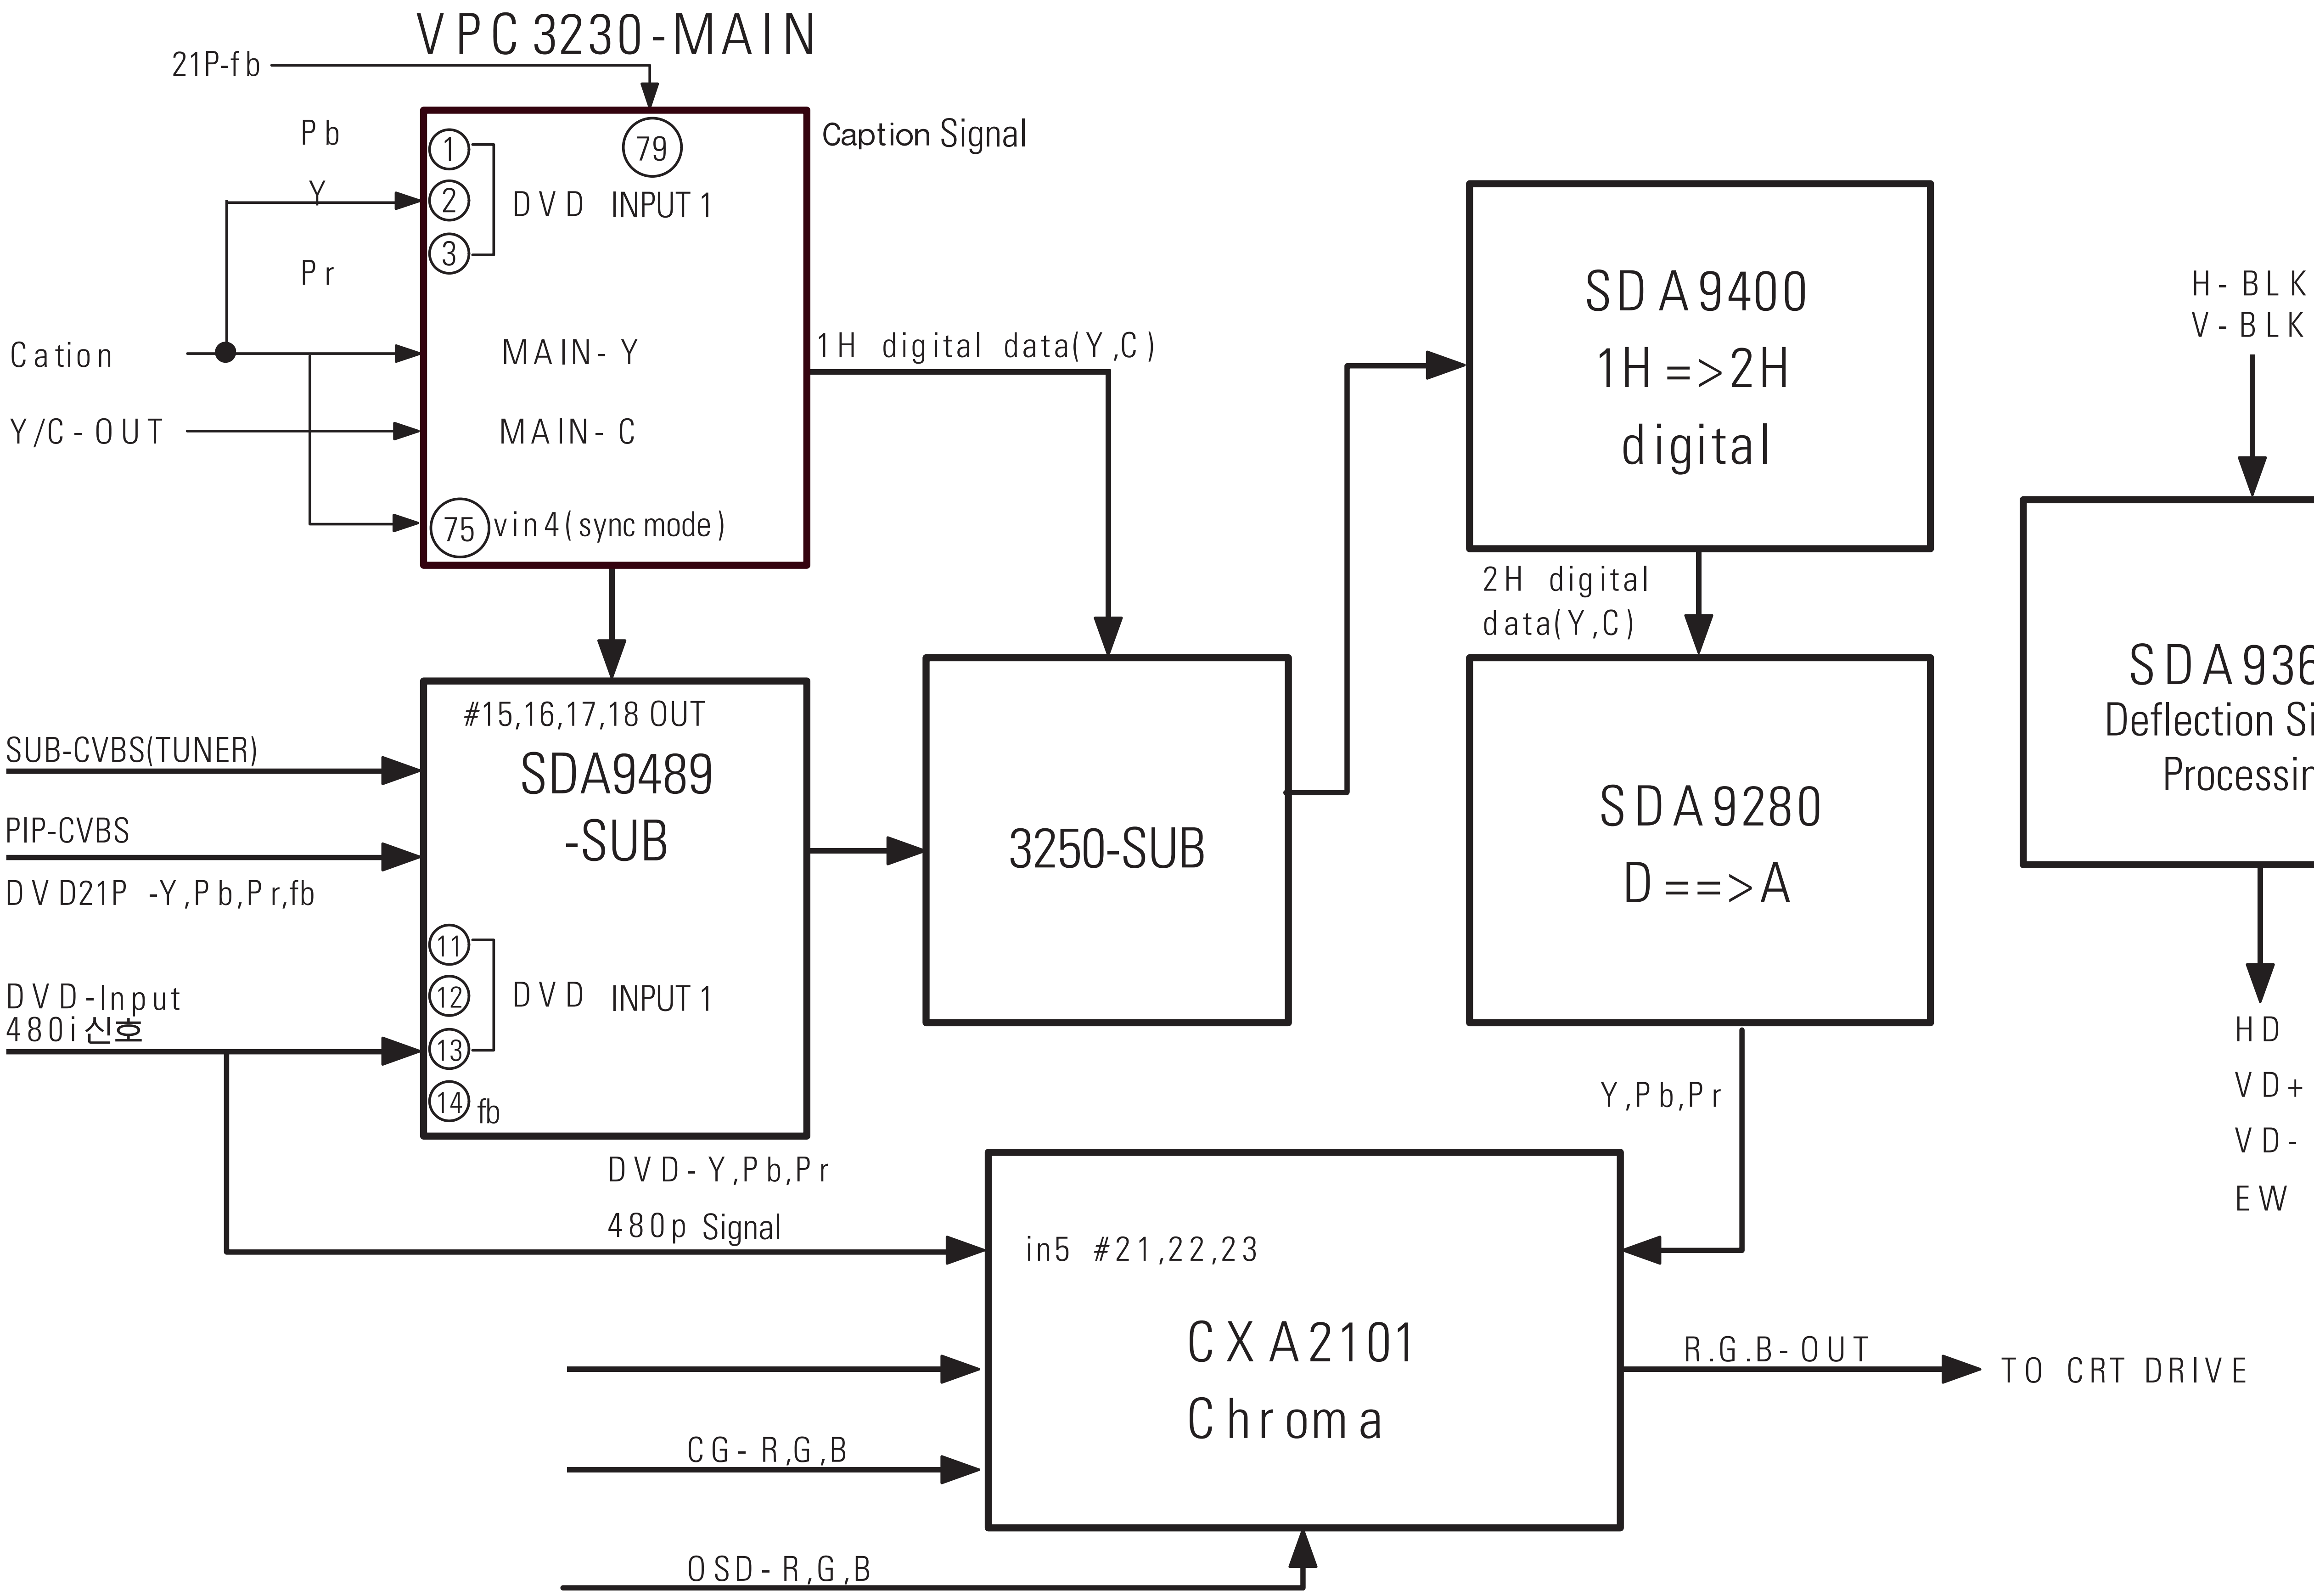


8-7 VPC 3230 RGB Input Change

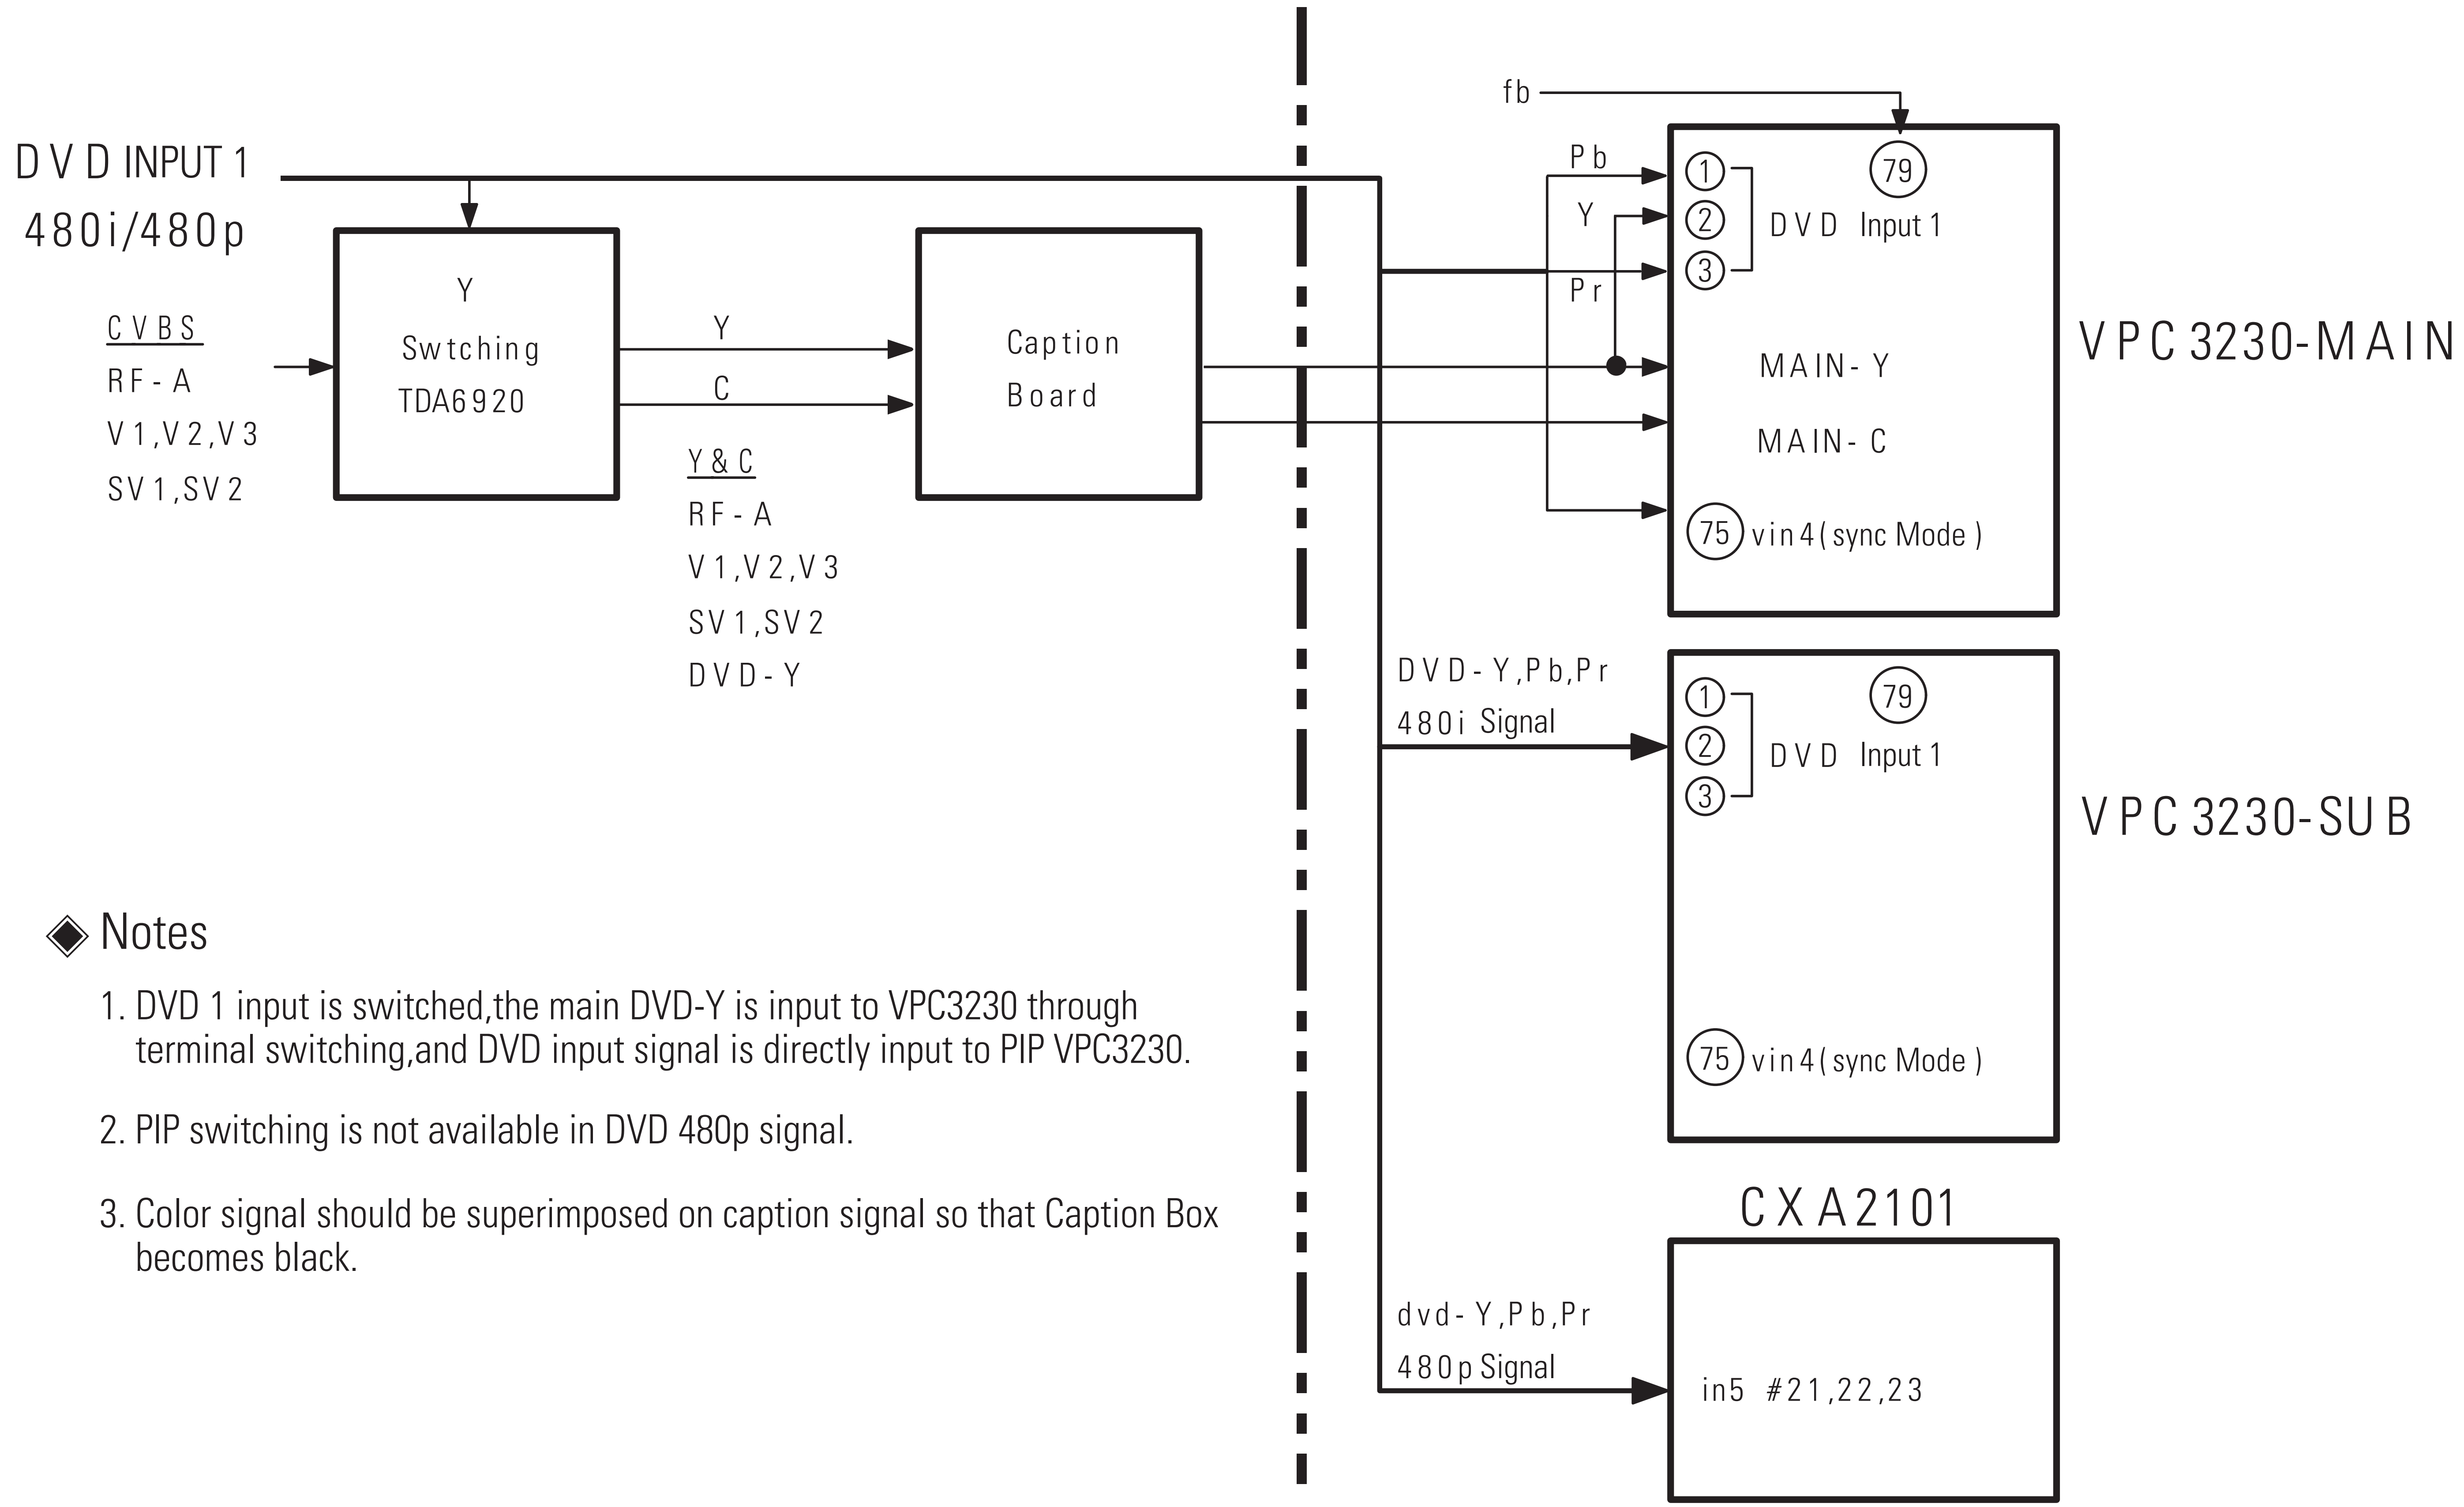


◈ Notes

1. DVD 1 input is switched,the main DVD-Y is input to VPC3230 through terminal switching,and DVD input signal is directly input to PIP VPC3230.
2. PIP switching is not available in DVD 480p signal.
3. Color signal should be superimposed on caption signal so that Caption Box becomes black.


8-8 Video S/W Signal Change

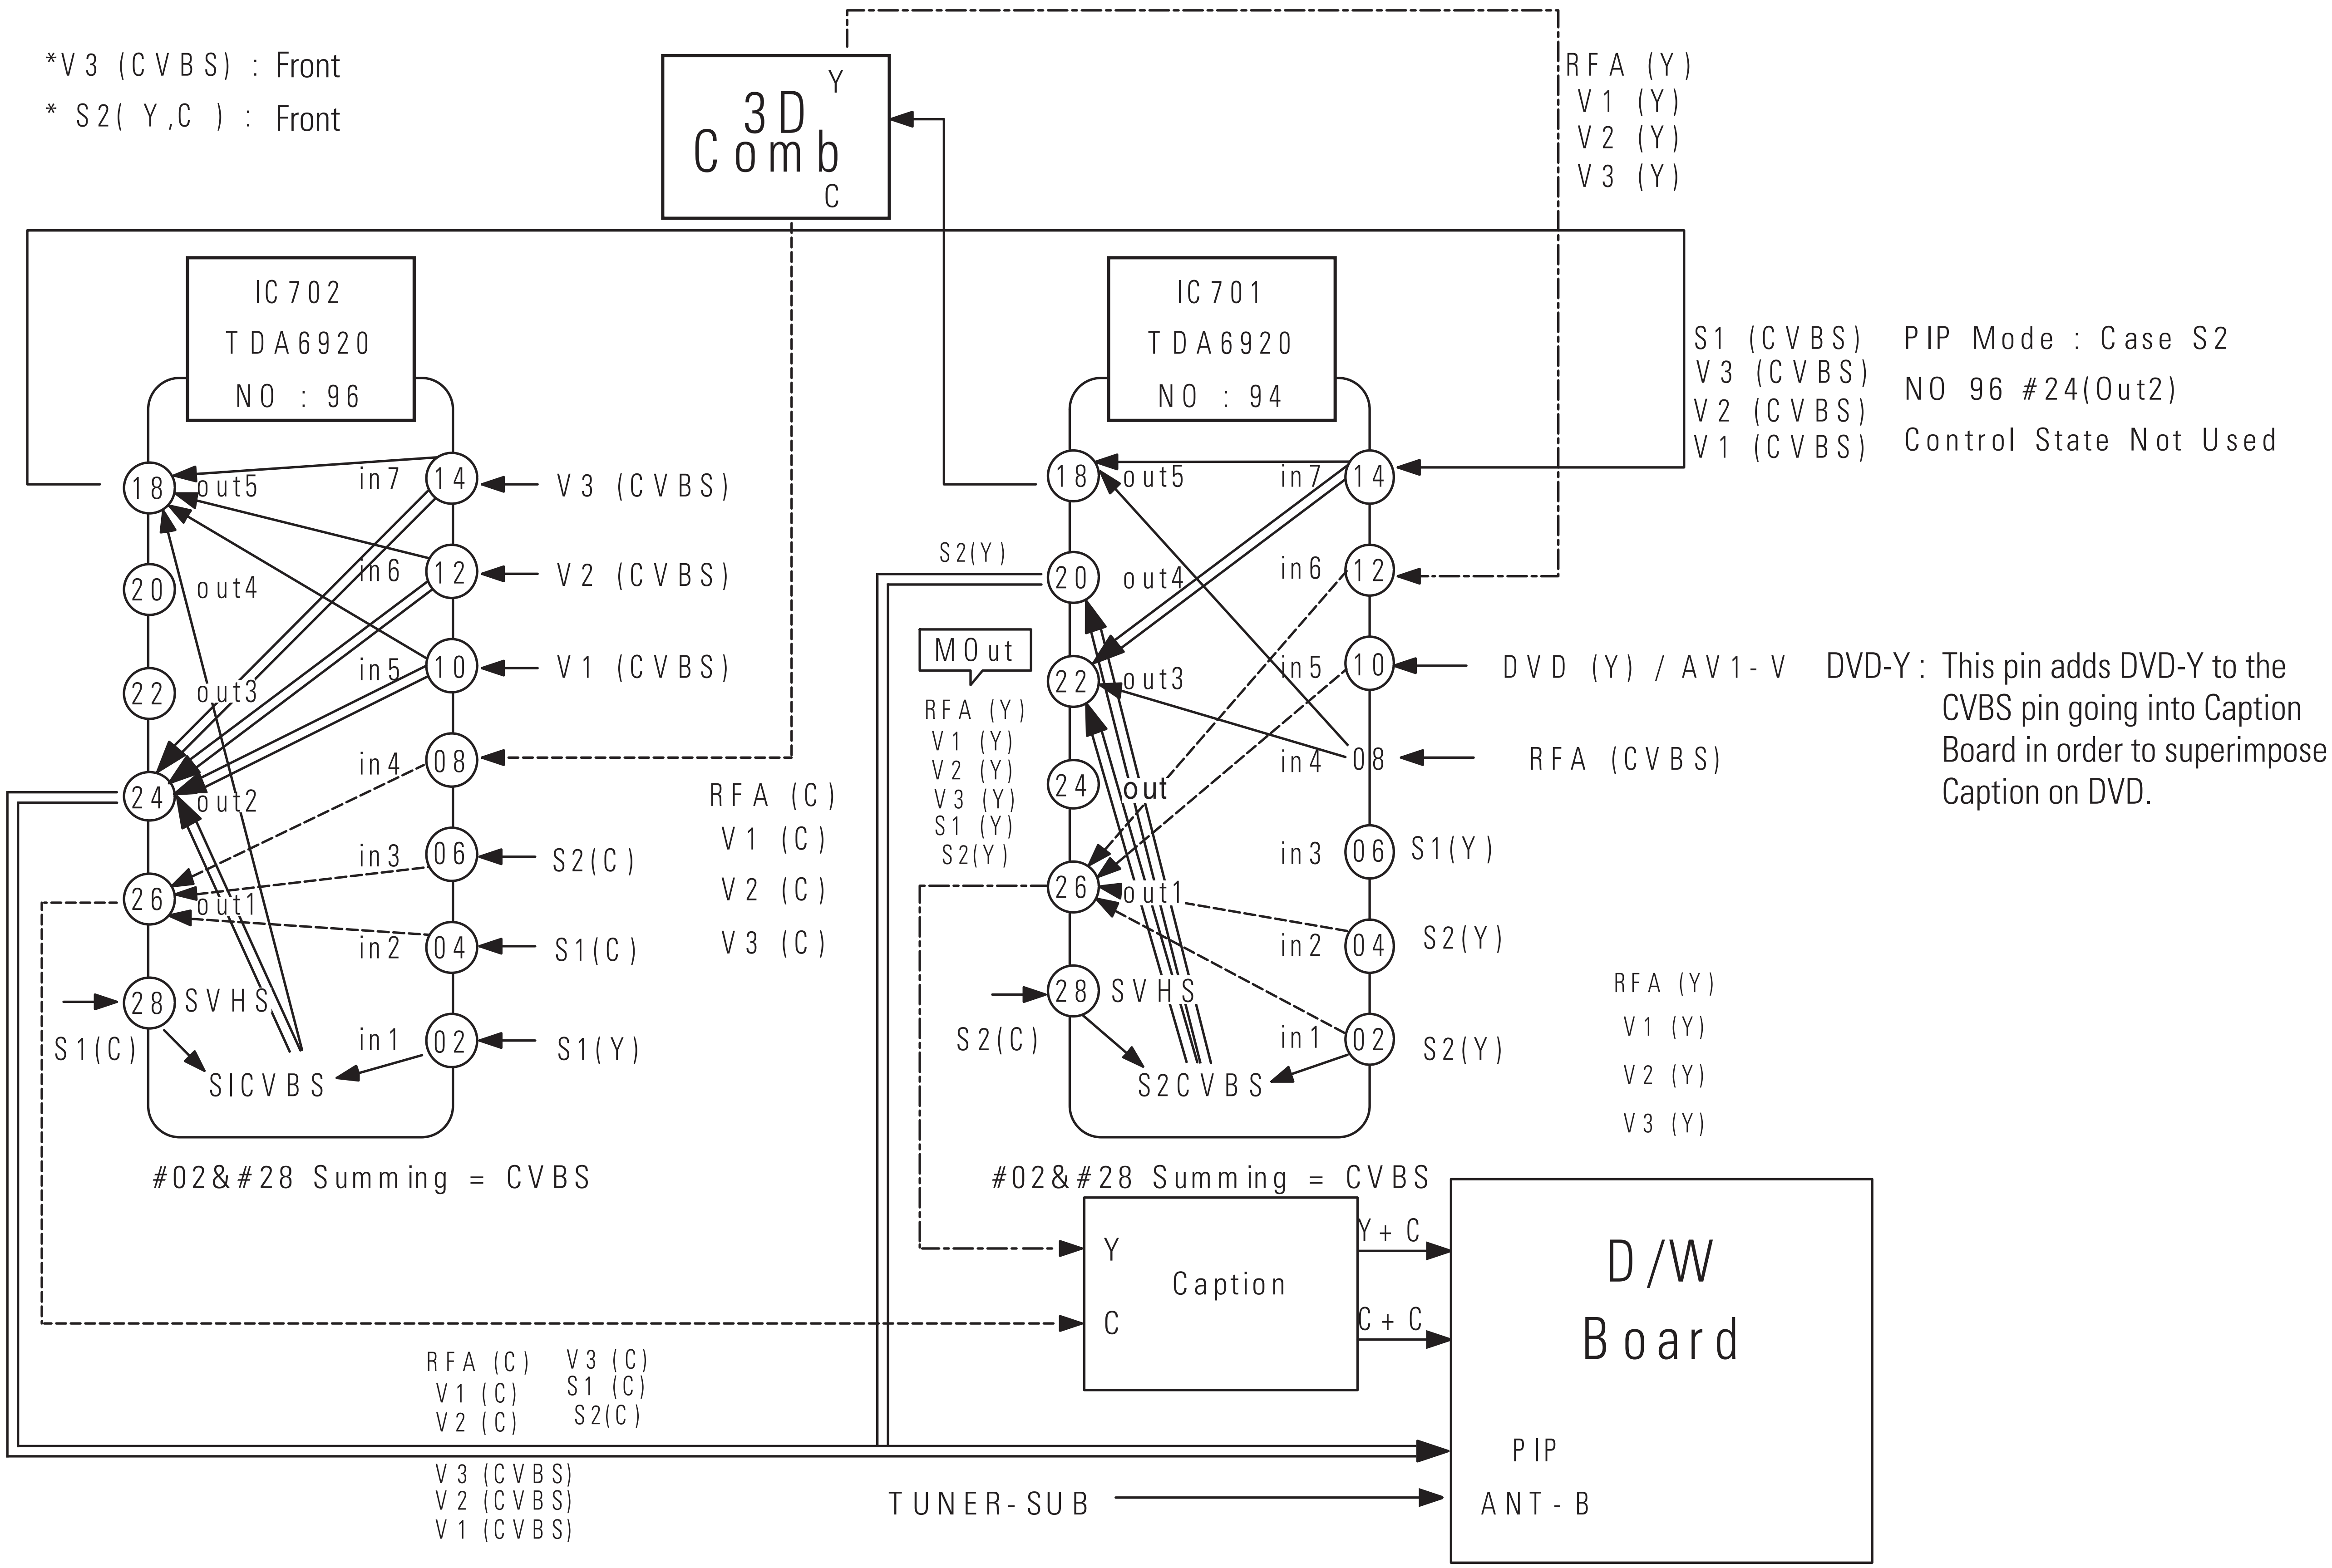

8-9 D/W Block Diagram (SDA9400)

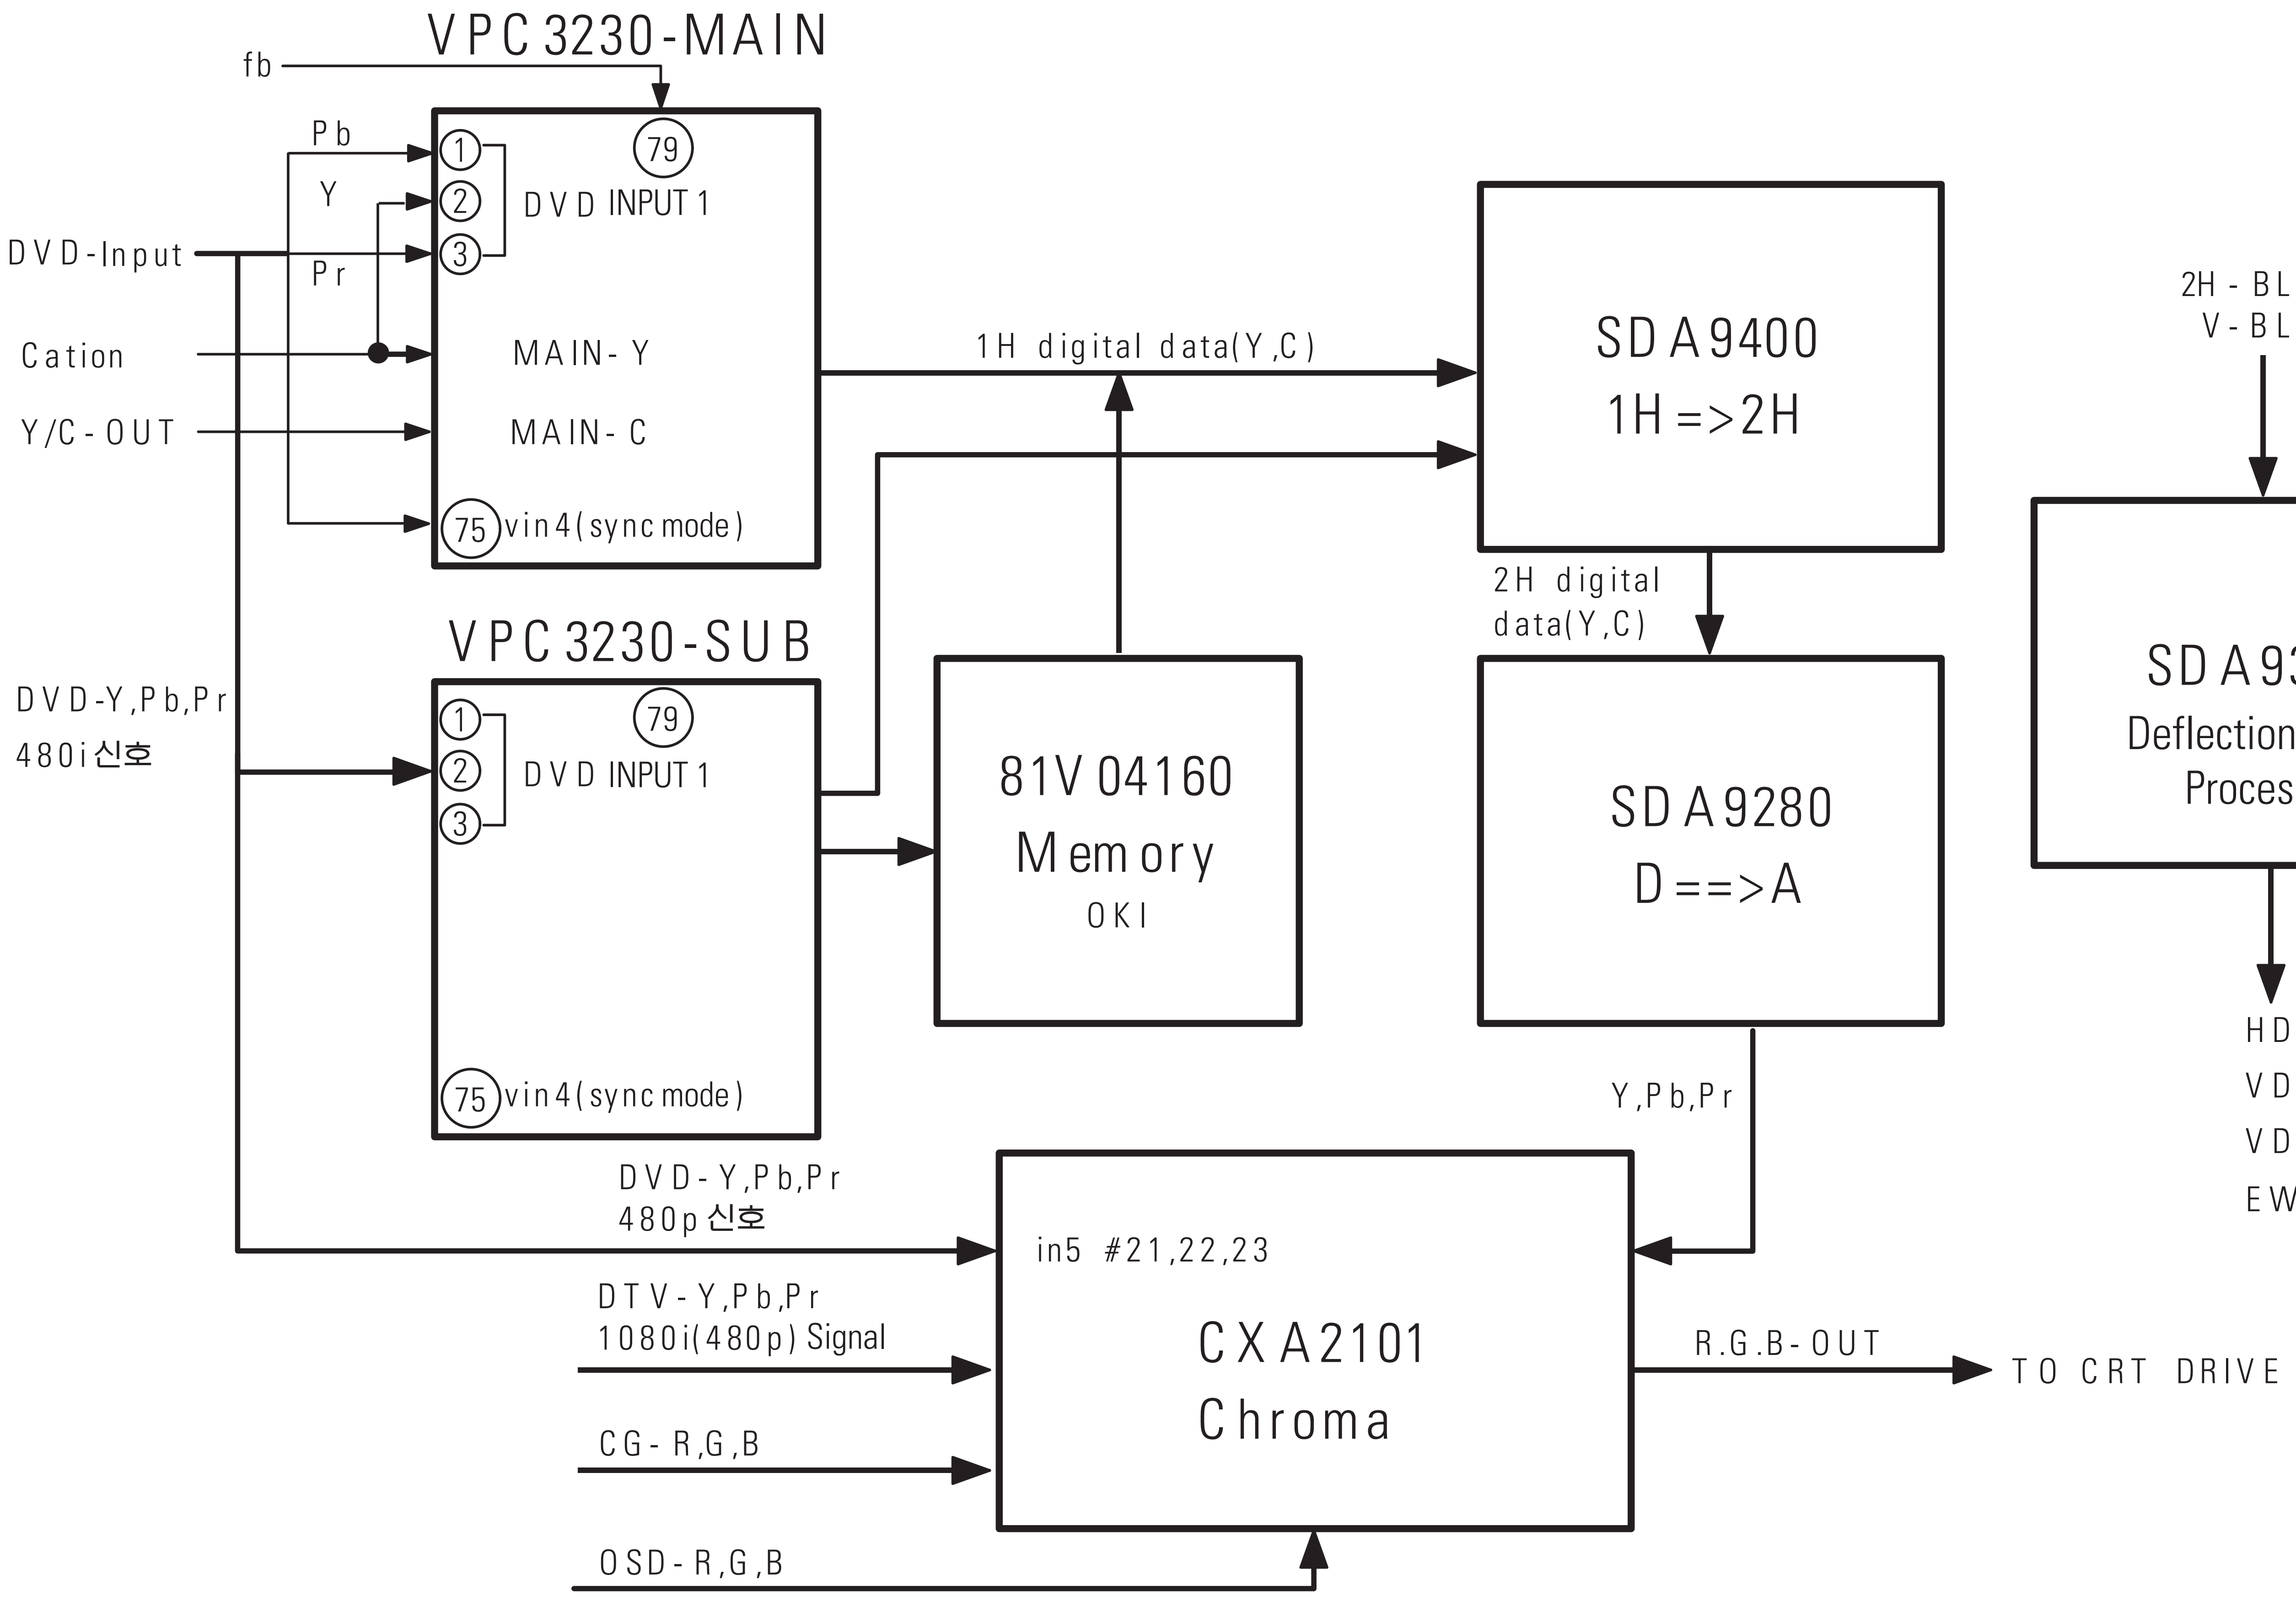

8-10 Sound Switching Block Diagram 1

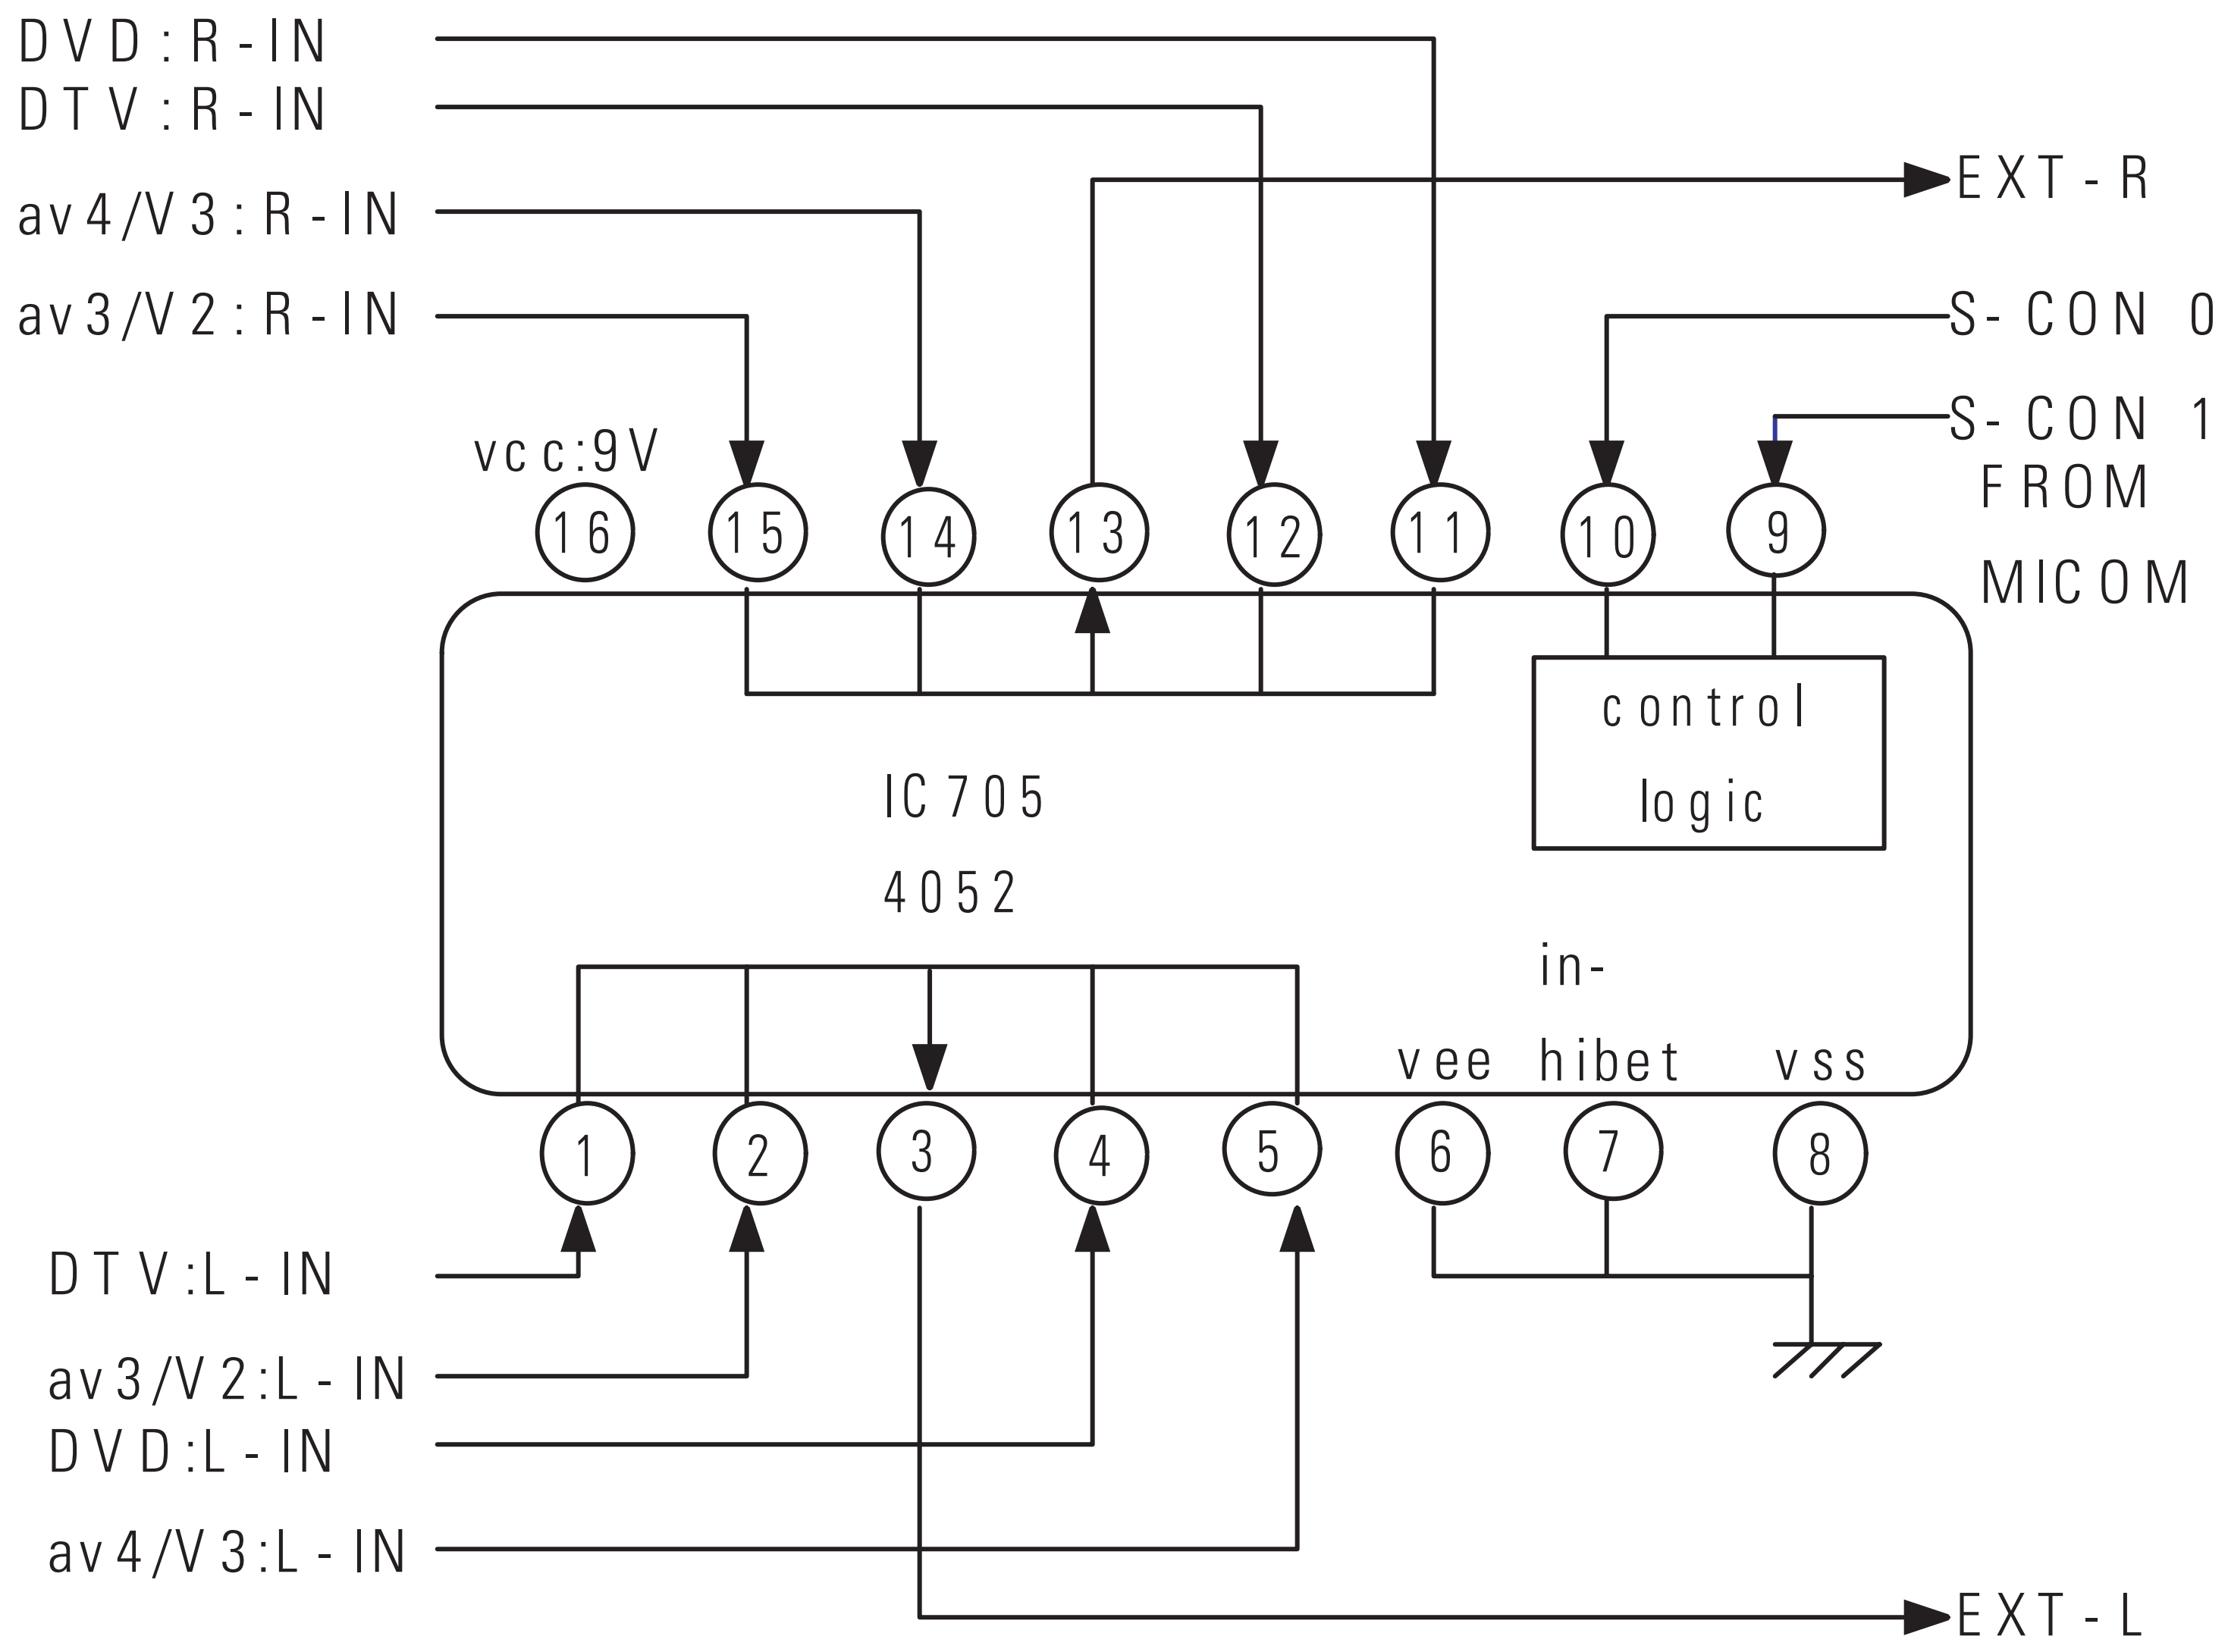

	S-CON 0	S-CON 1
DTV	0	0
AV3/VIDEO2	0	1
AV4/VIDEO3	1	0
DVD	1	1


◆ Signal Processing

The first Sound Switching is performed at IC706:4052 IC, the main micom is controlled by S-CON0/1, and then the second Sound Switching is performed at MSP3452 Sound IC.

◆ Note : The S-Video 1 sound is output only when Video 1 Sound is connected.


AV1 (SCART1) : PAL ONLY
AV2 (VIDEO1) : NT / PAL
AV3 (VIDEO2) : NT / PAL
AV4 (VIDEO3) : NT / PAL

8-11 Sound Switching Block Diagram 2

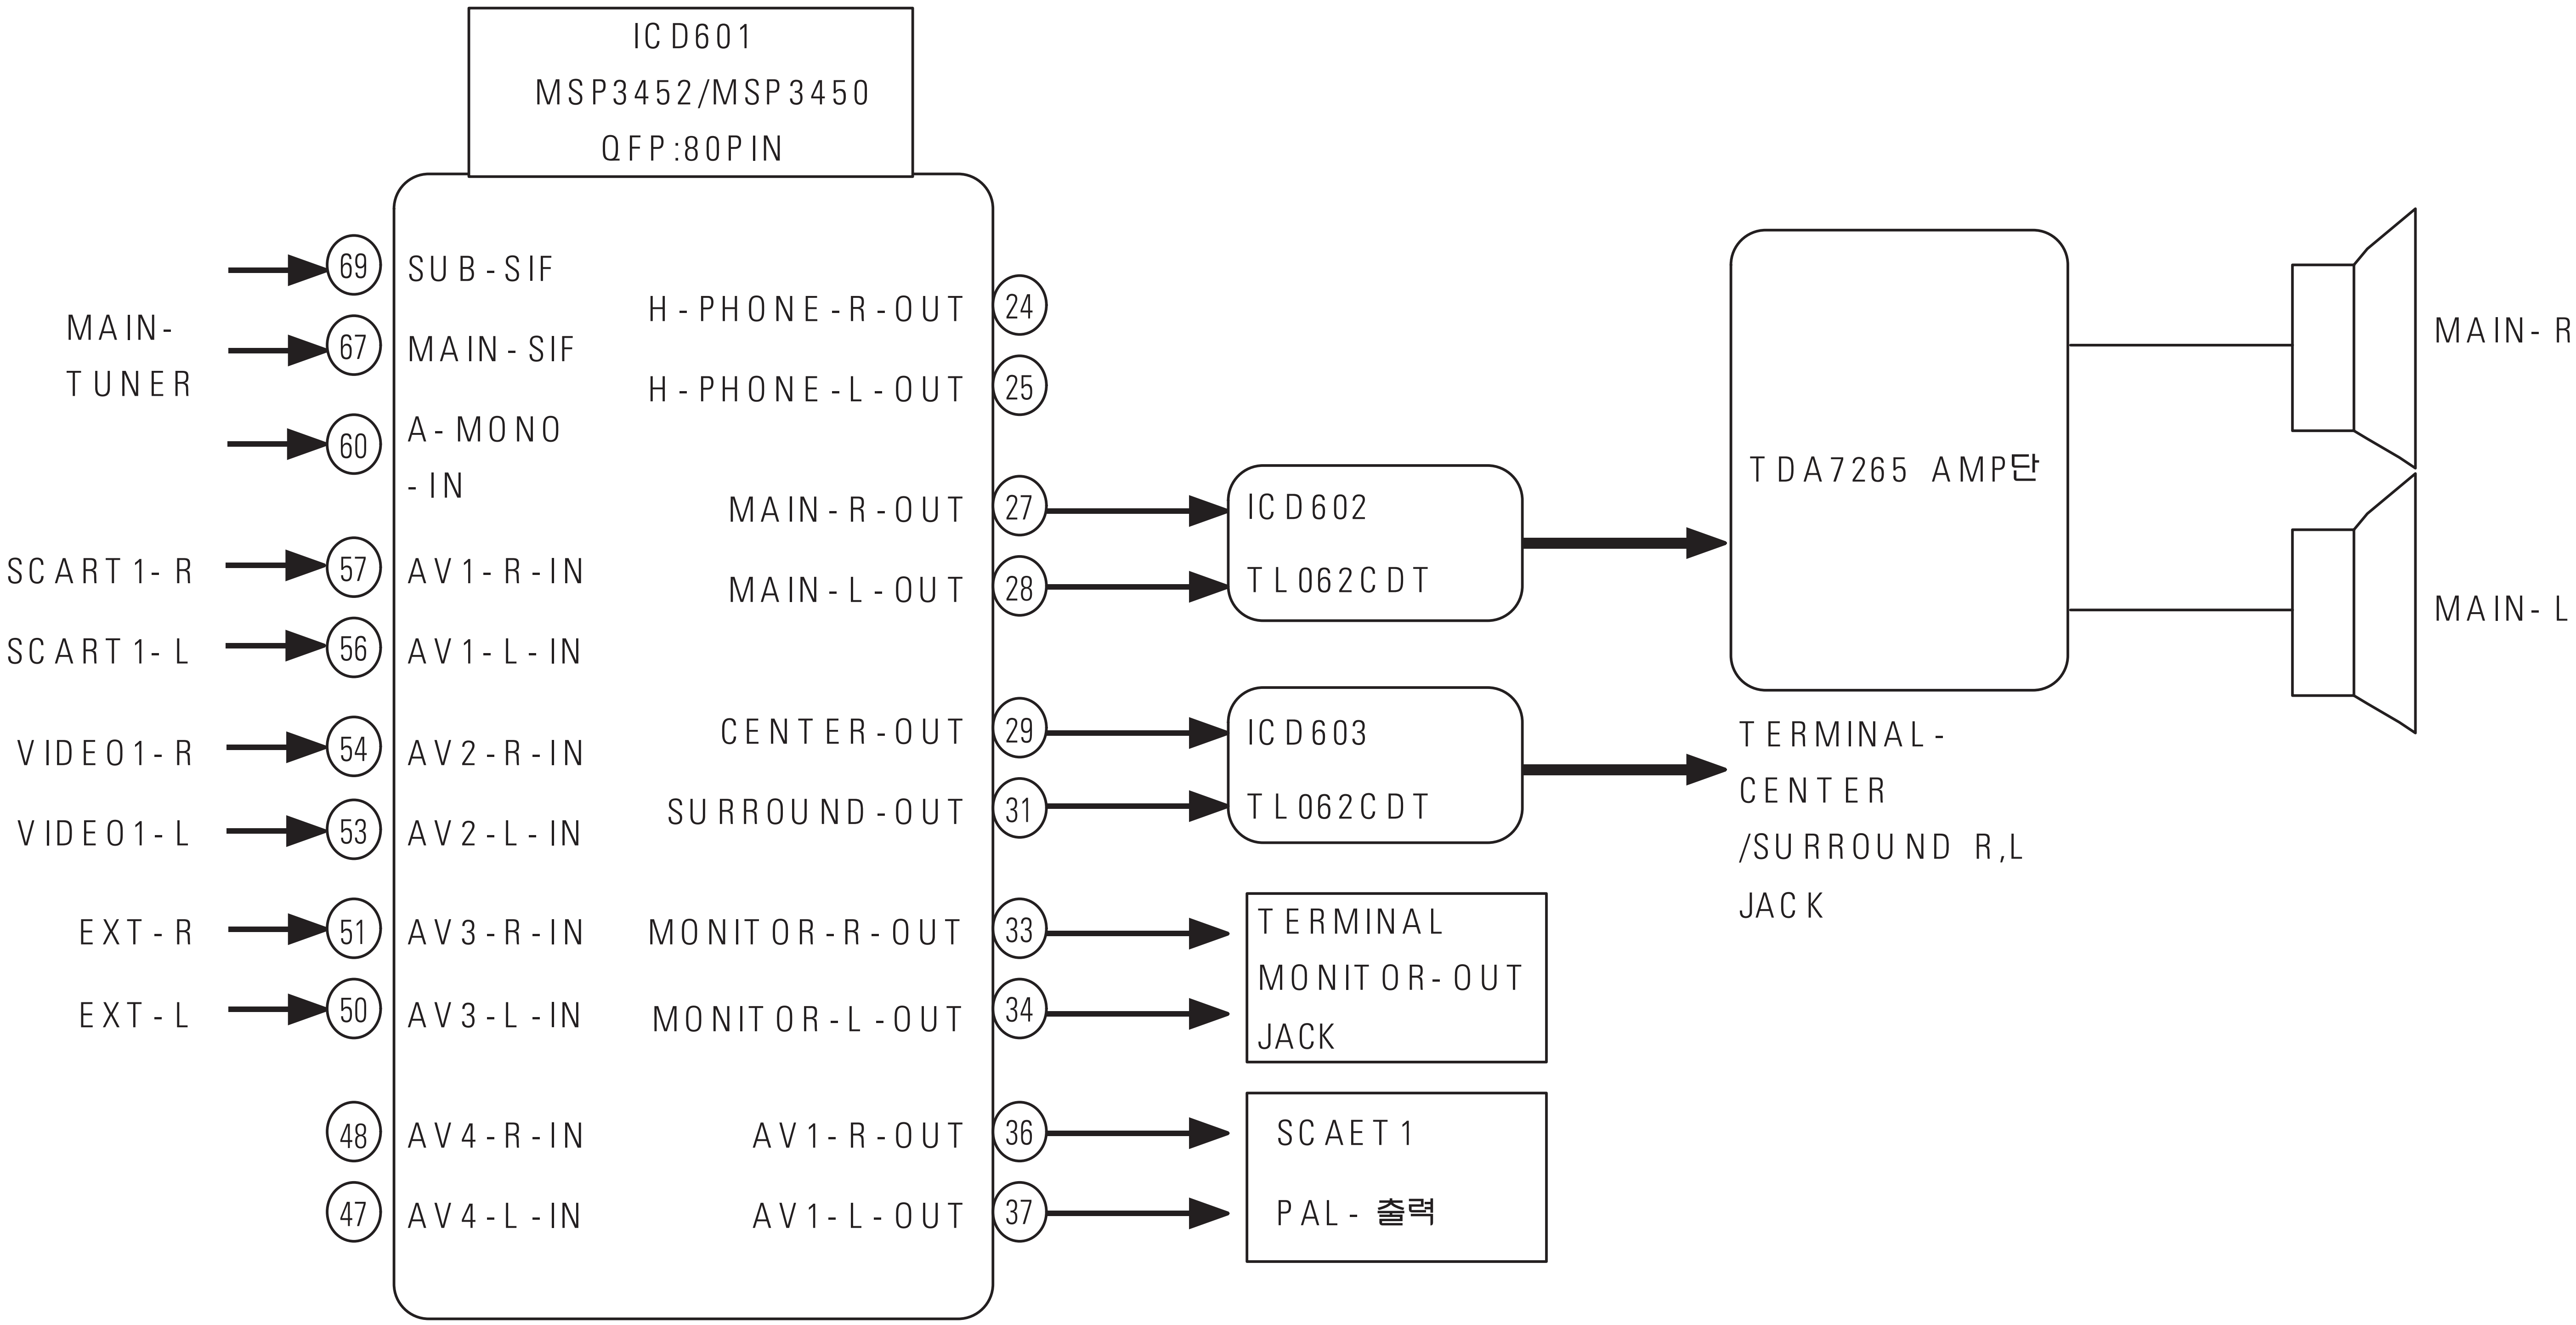


◈ MSP3452/3450 is a multifunctional IC, and so it can be used in both of NTSC/PAL system.
MSP3452 : Dolby function
MSP3450 : Simple Stereo, Sound Multiplex


8-12 Auto Convergence Block

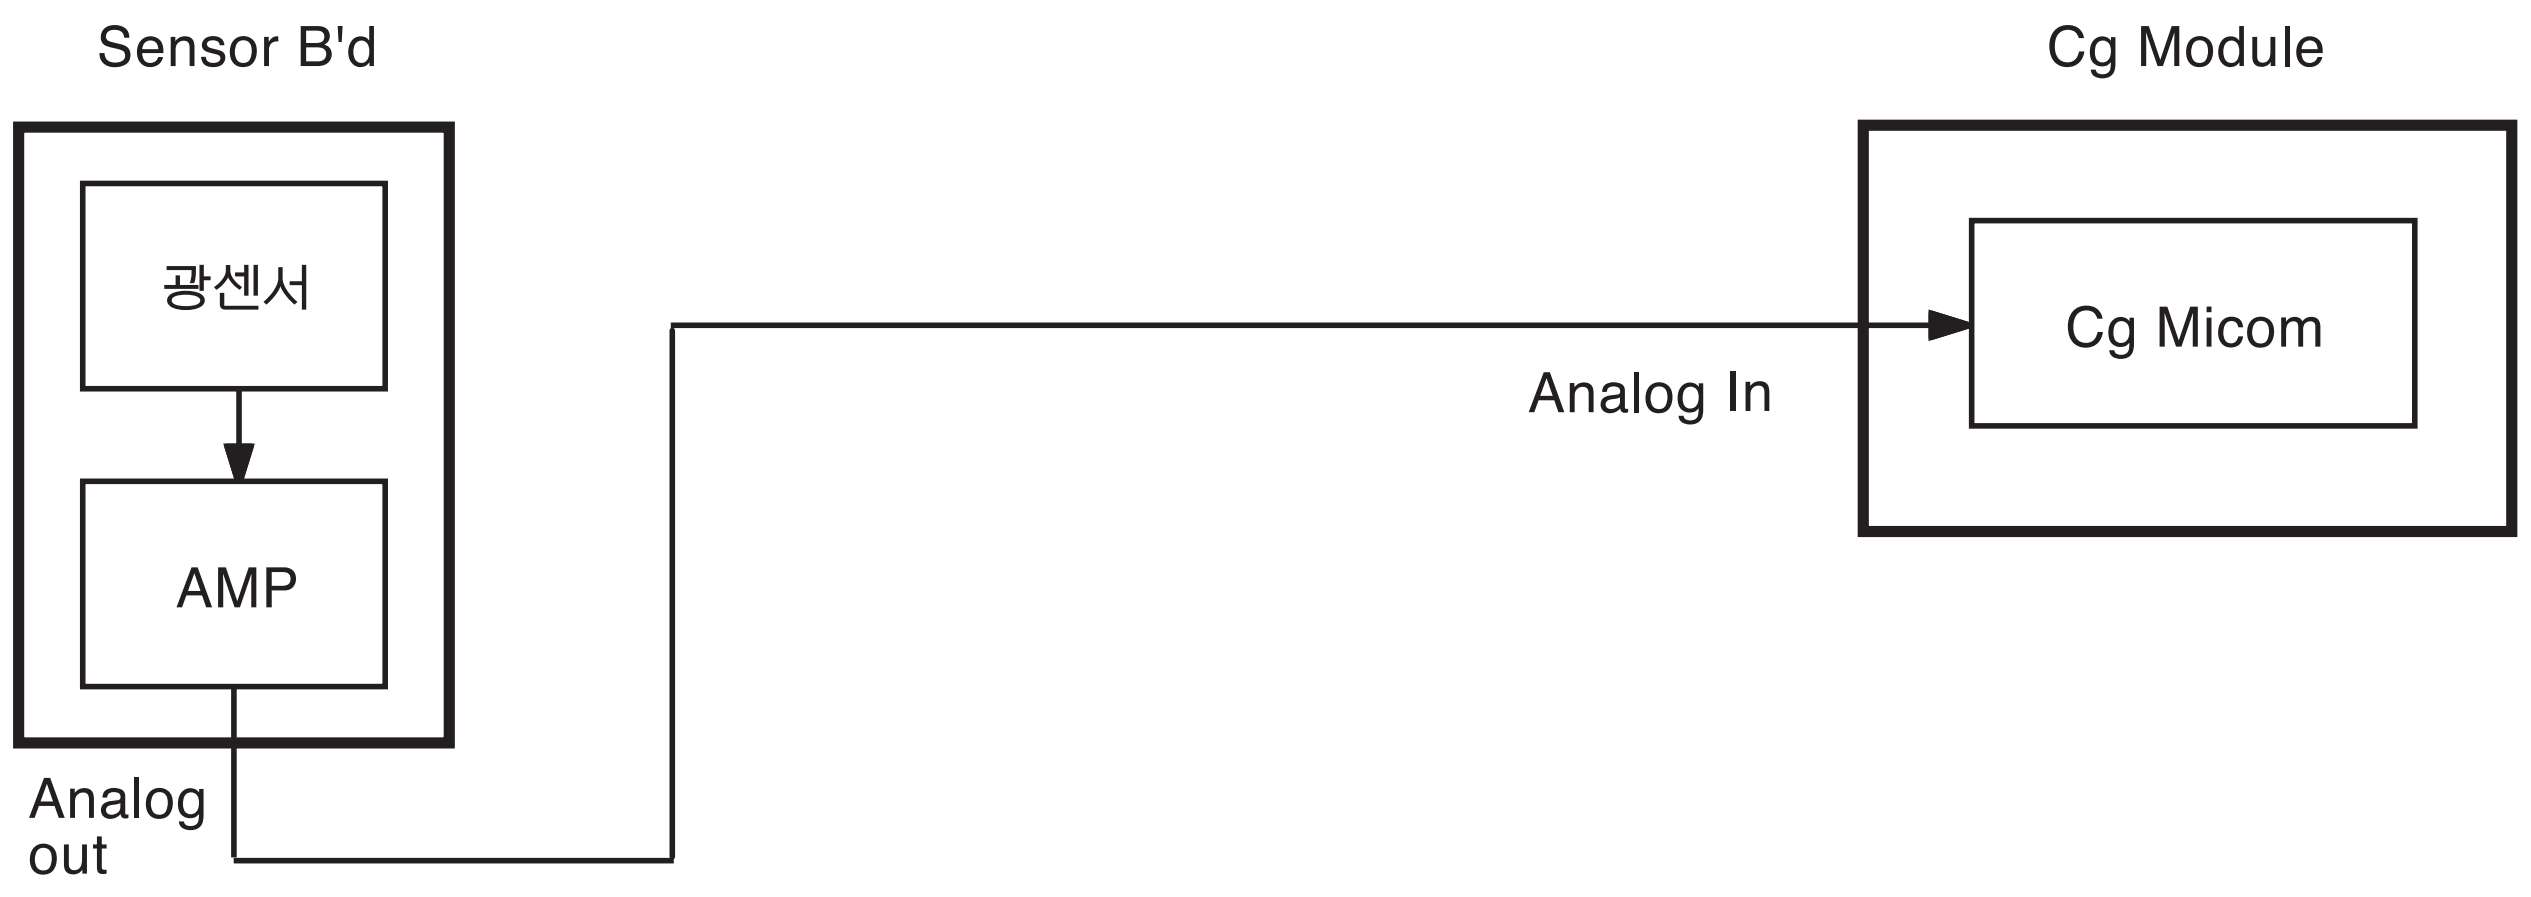


8-13 In/Out by Block

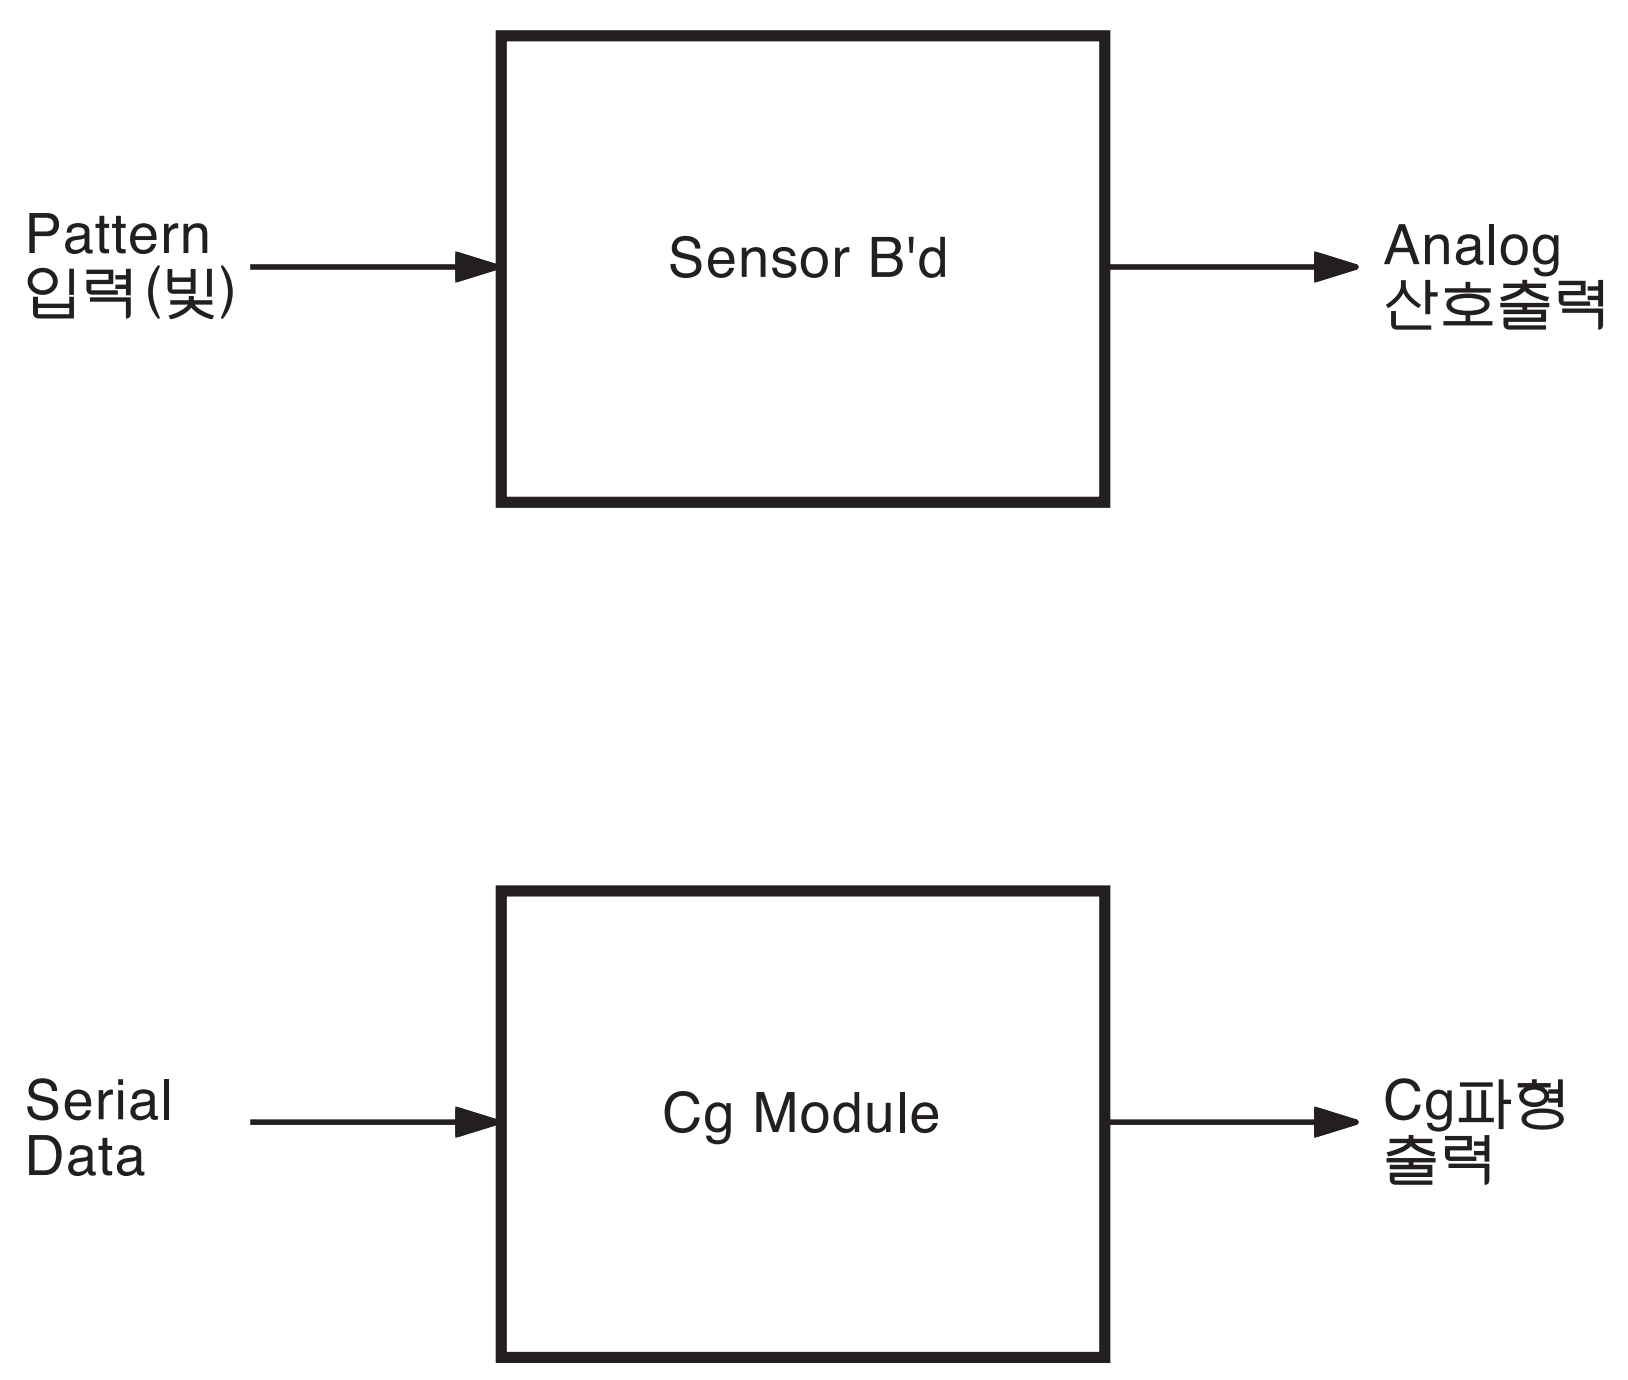


8-14 Signal Connection by Block

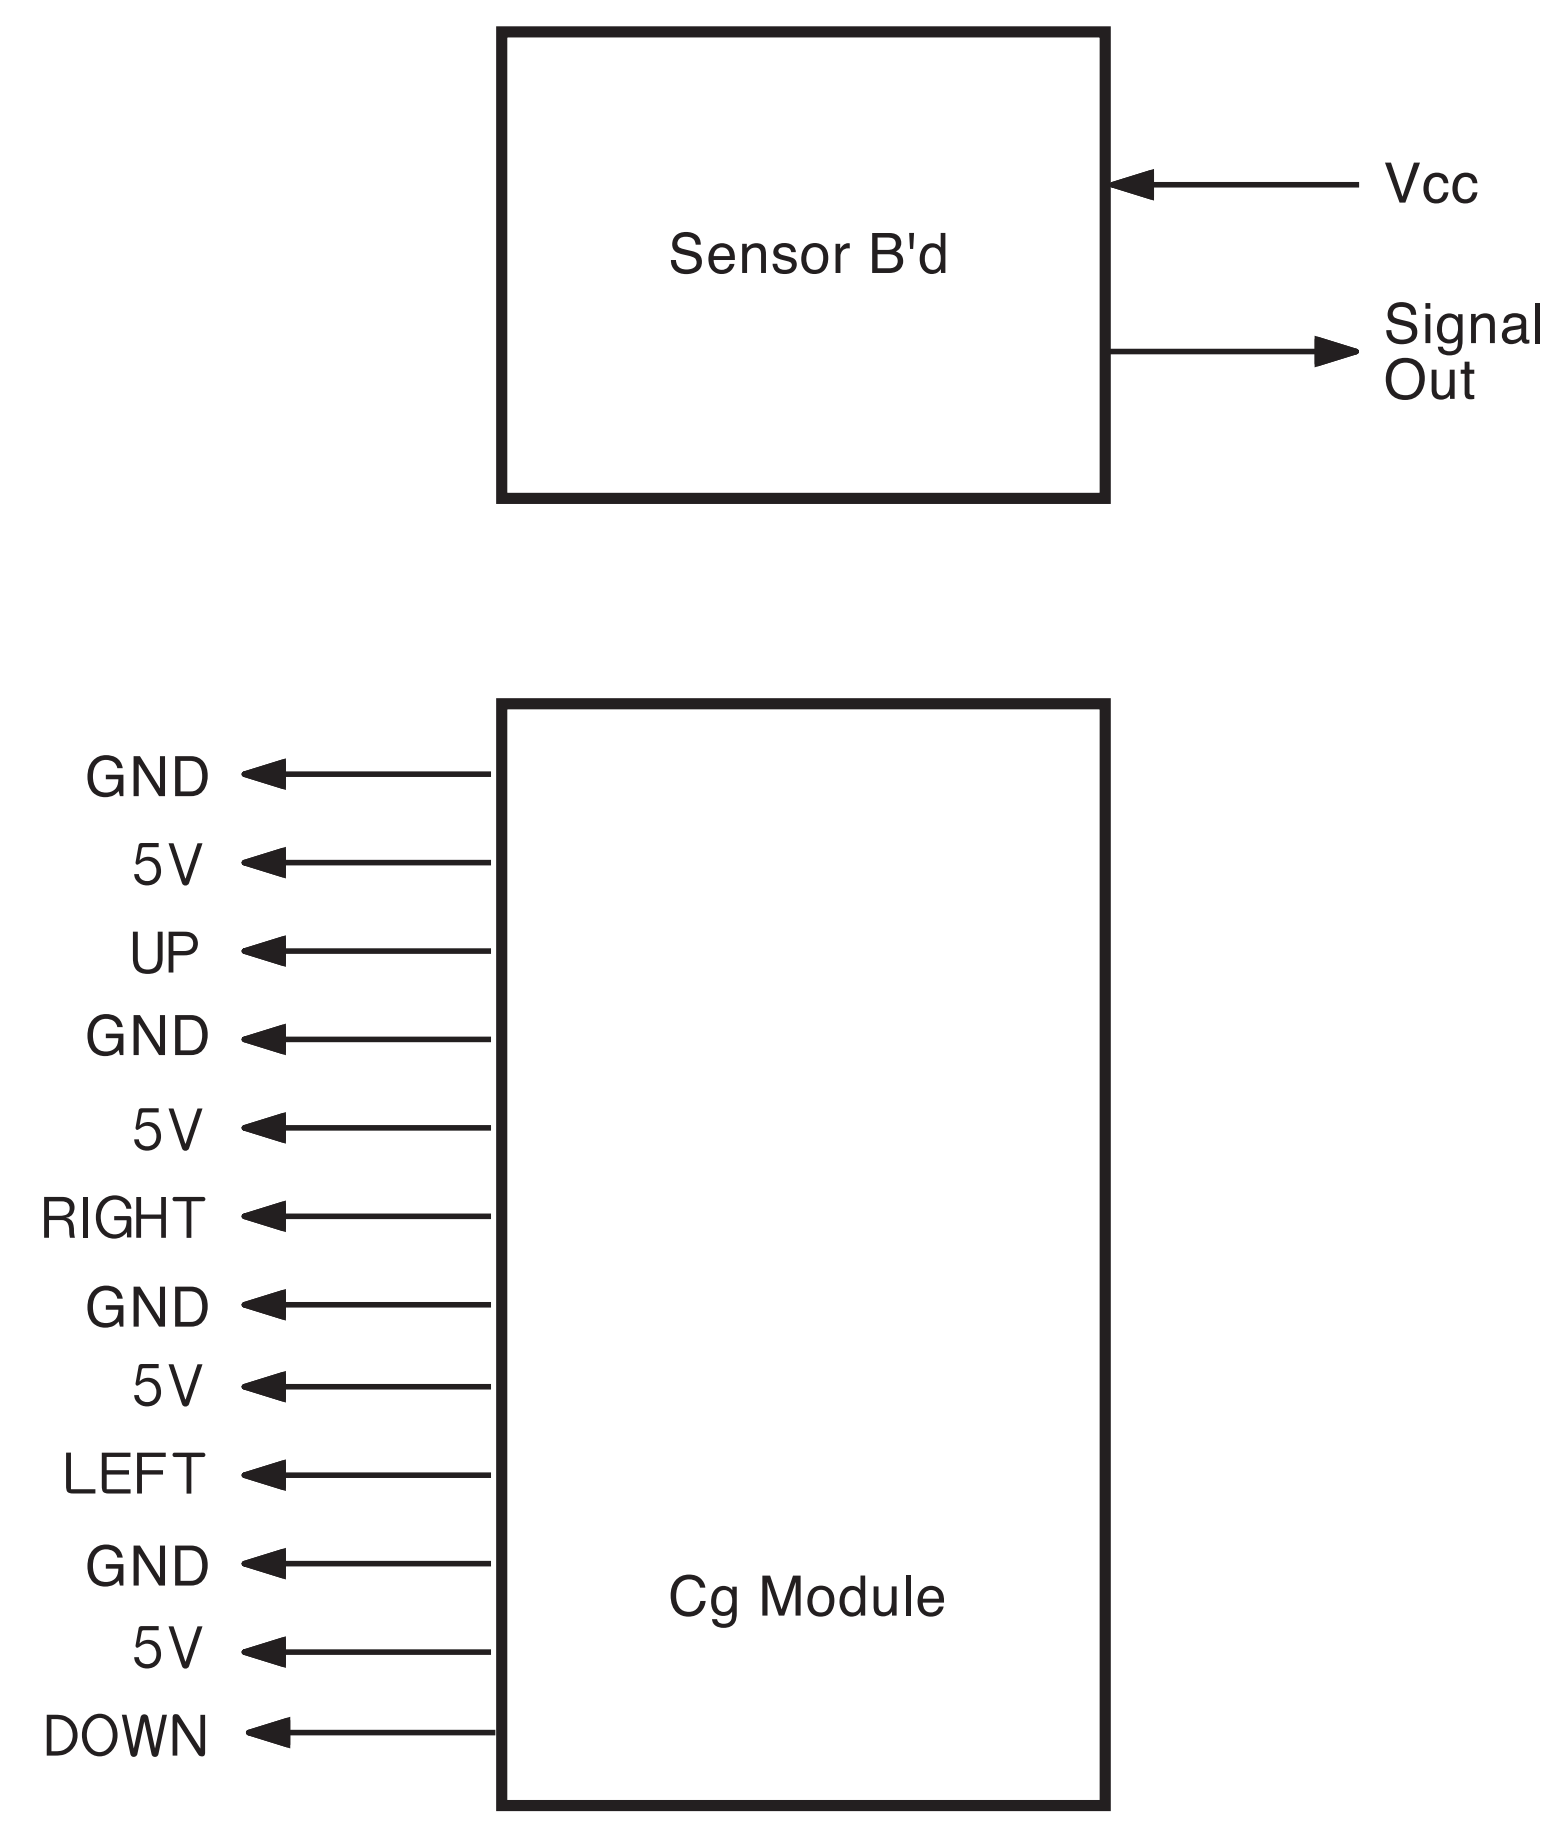

8-15 Auto Convergence Flow

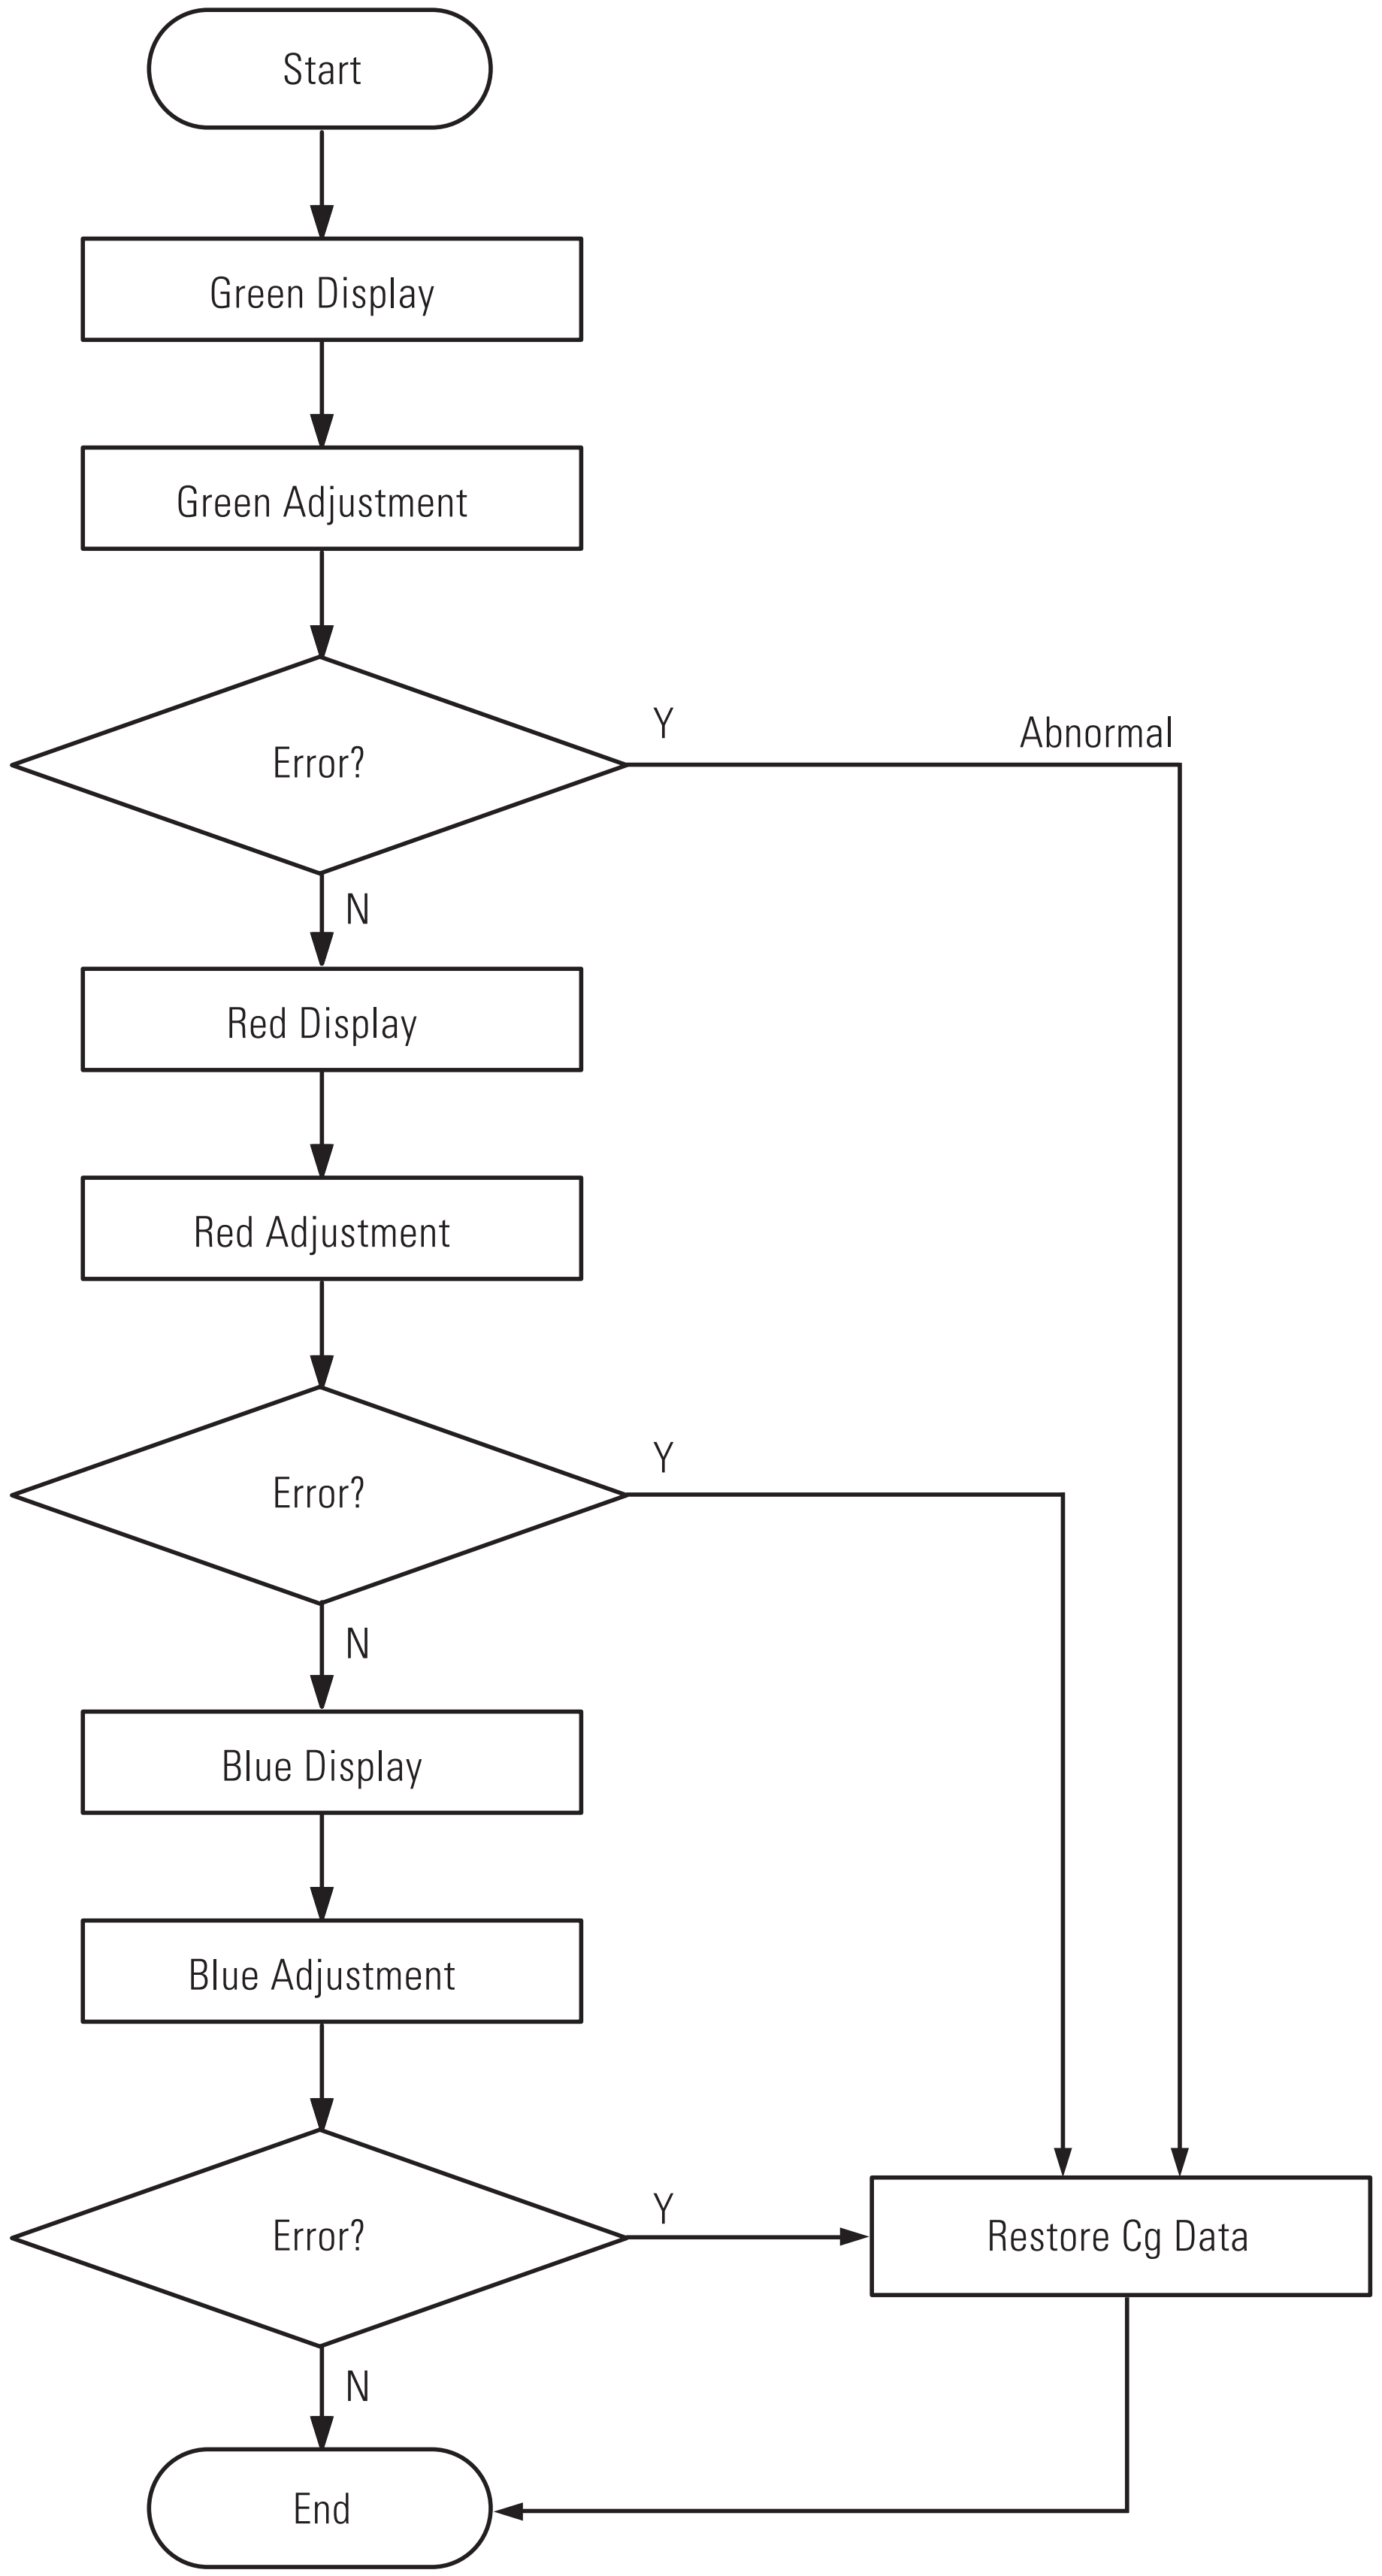


8-16 Auto Magnetic Field Adjustment Flow

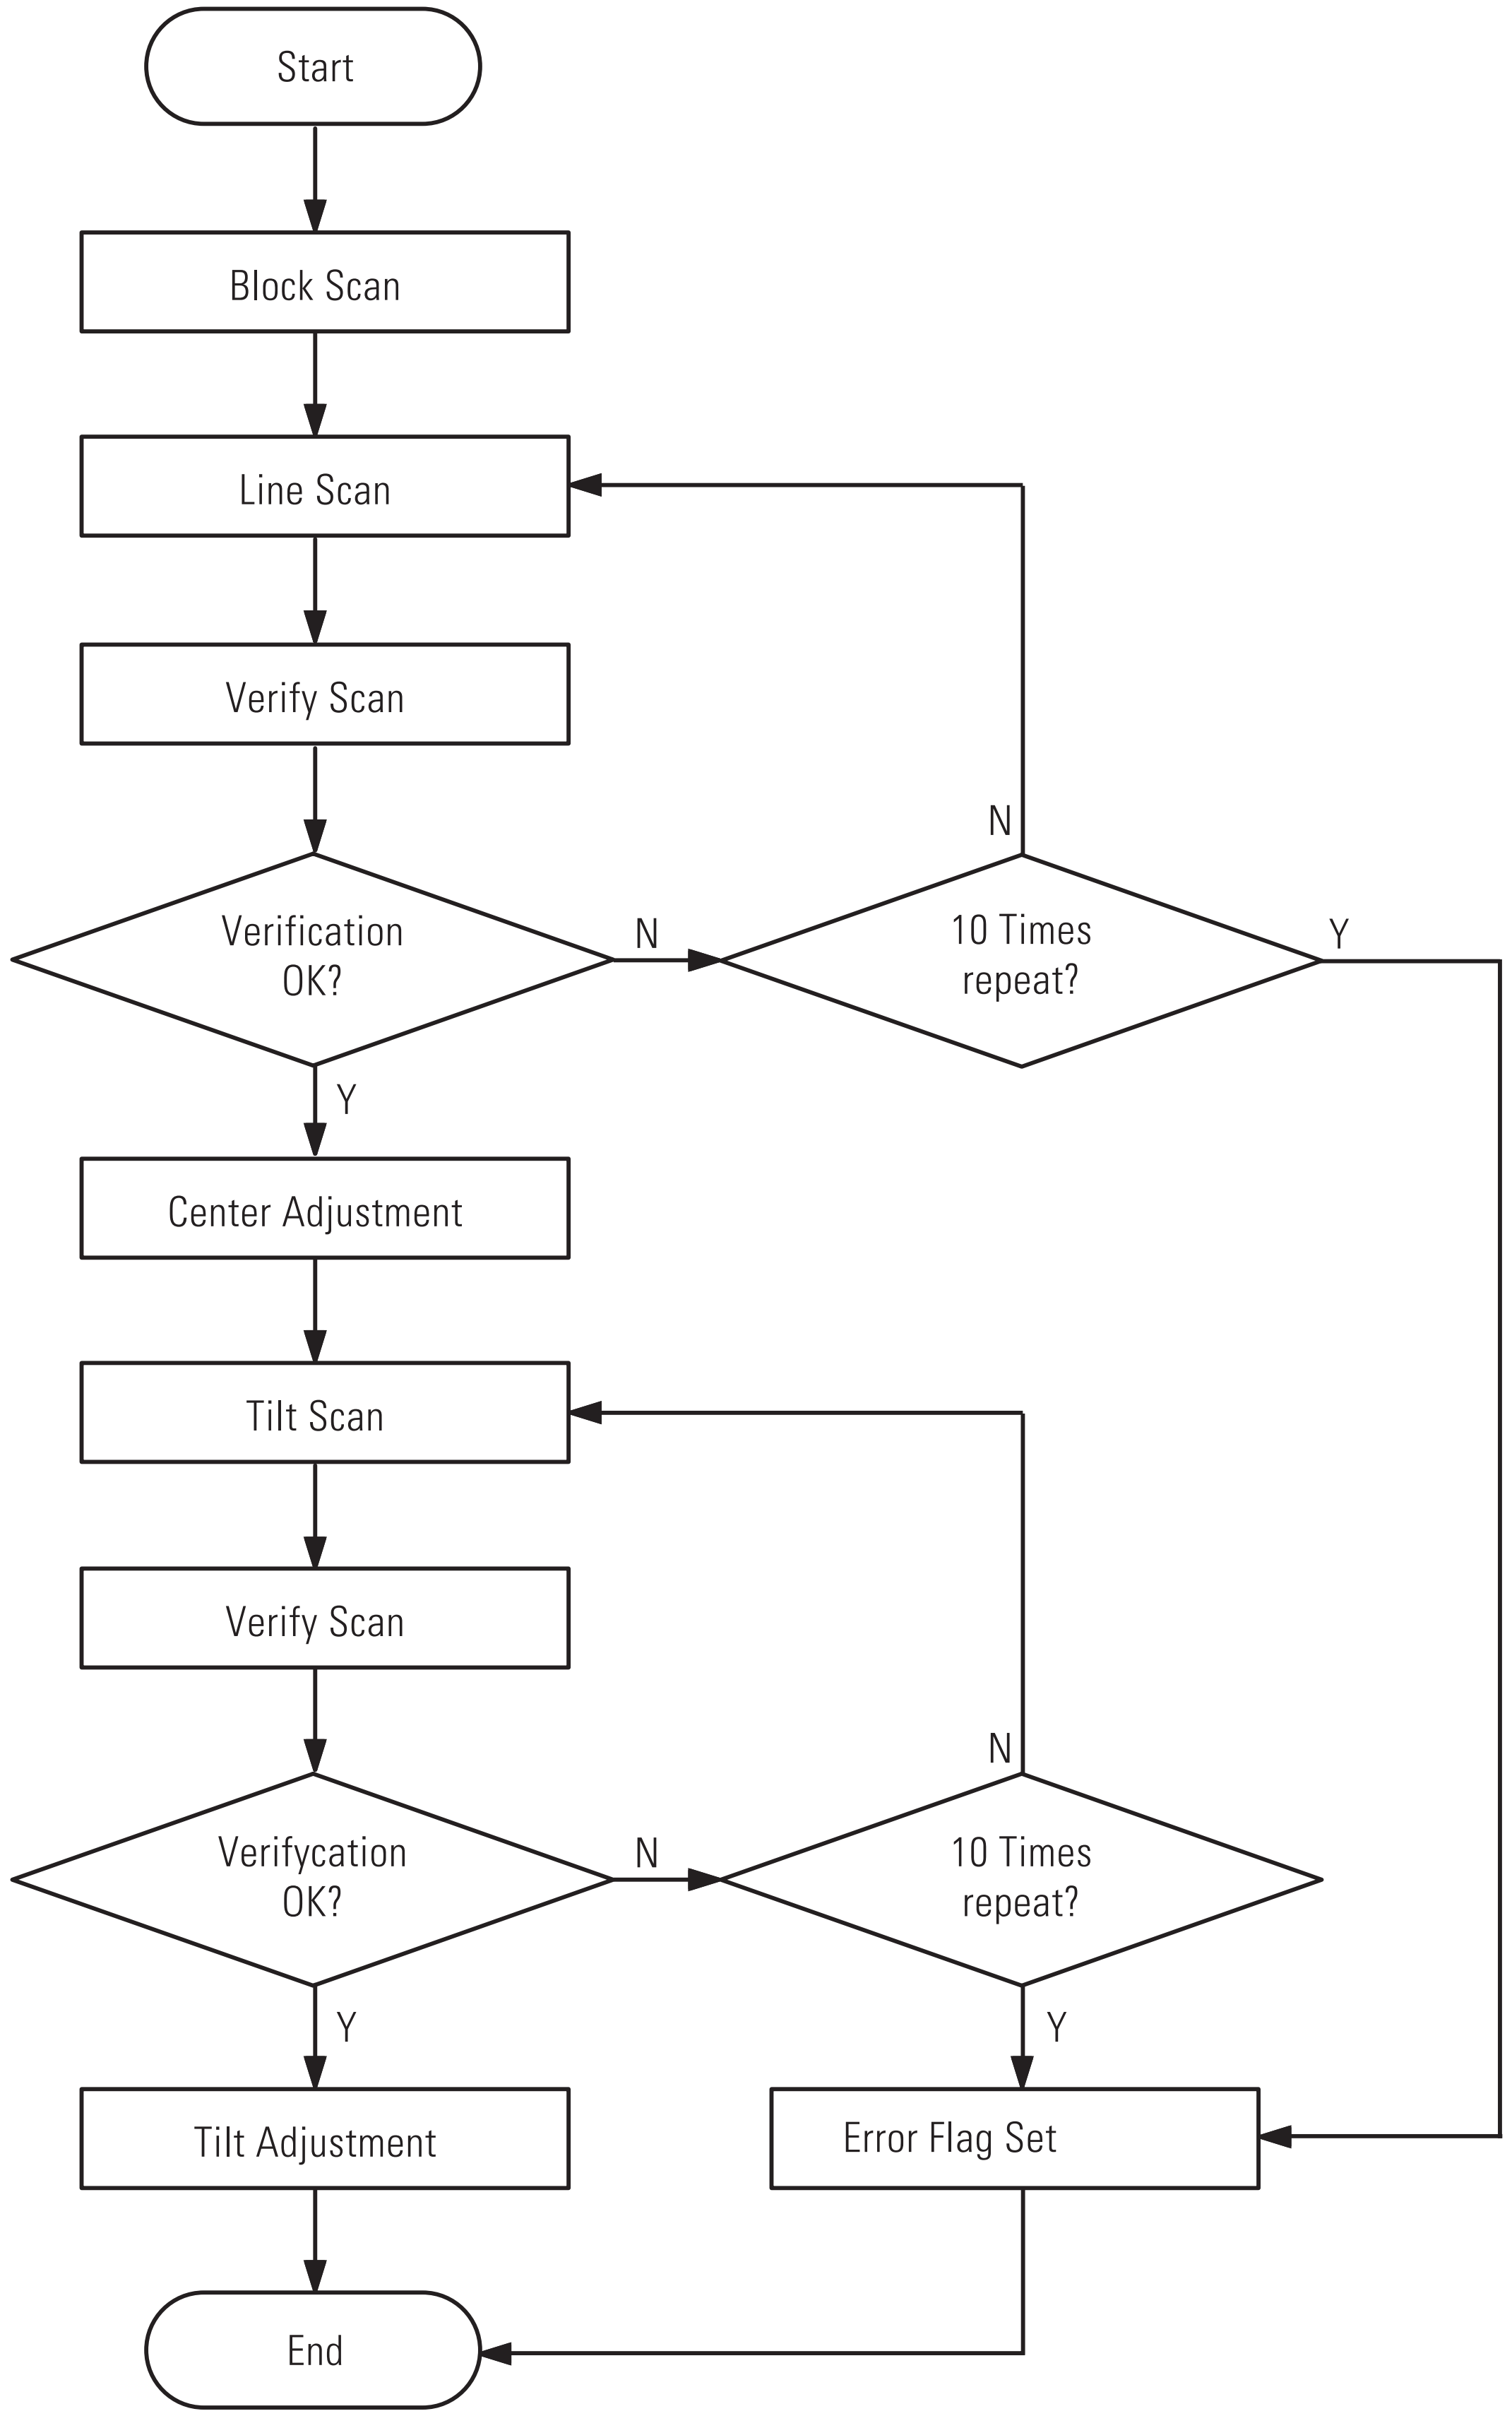


9. Wiring Diagram

9-1 Pcb Connection(Progressive)

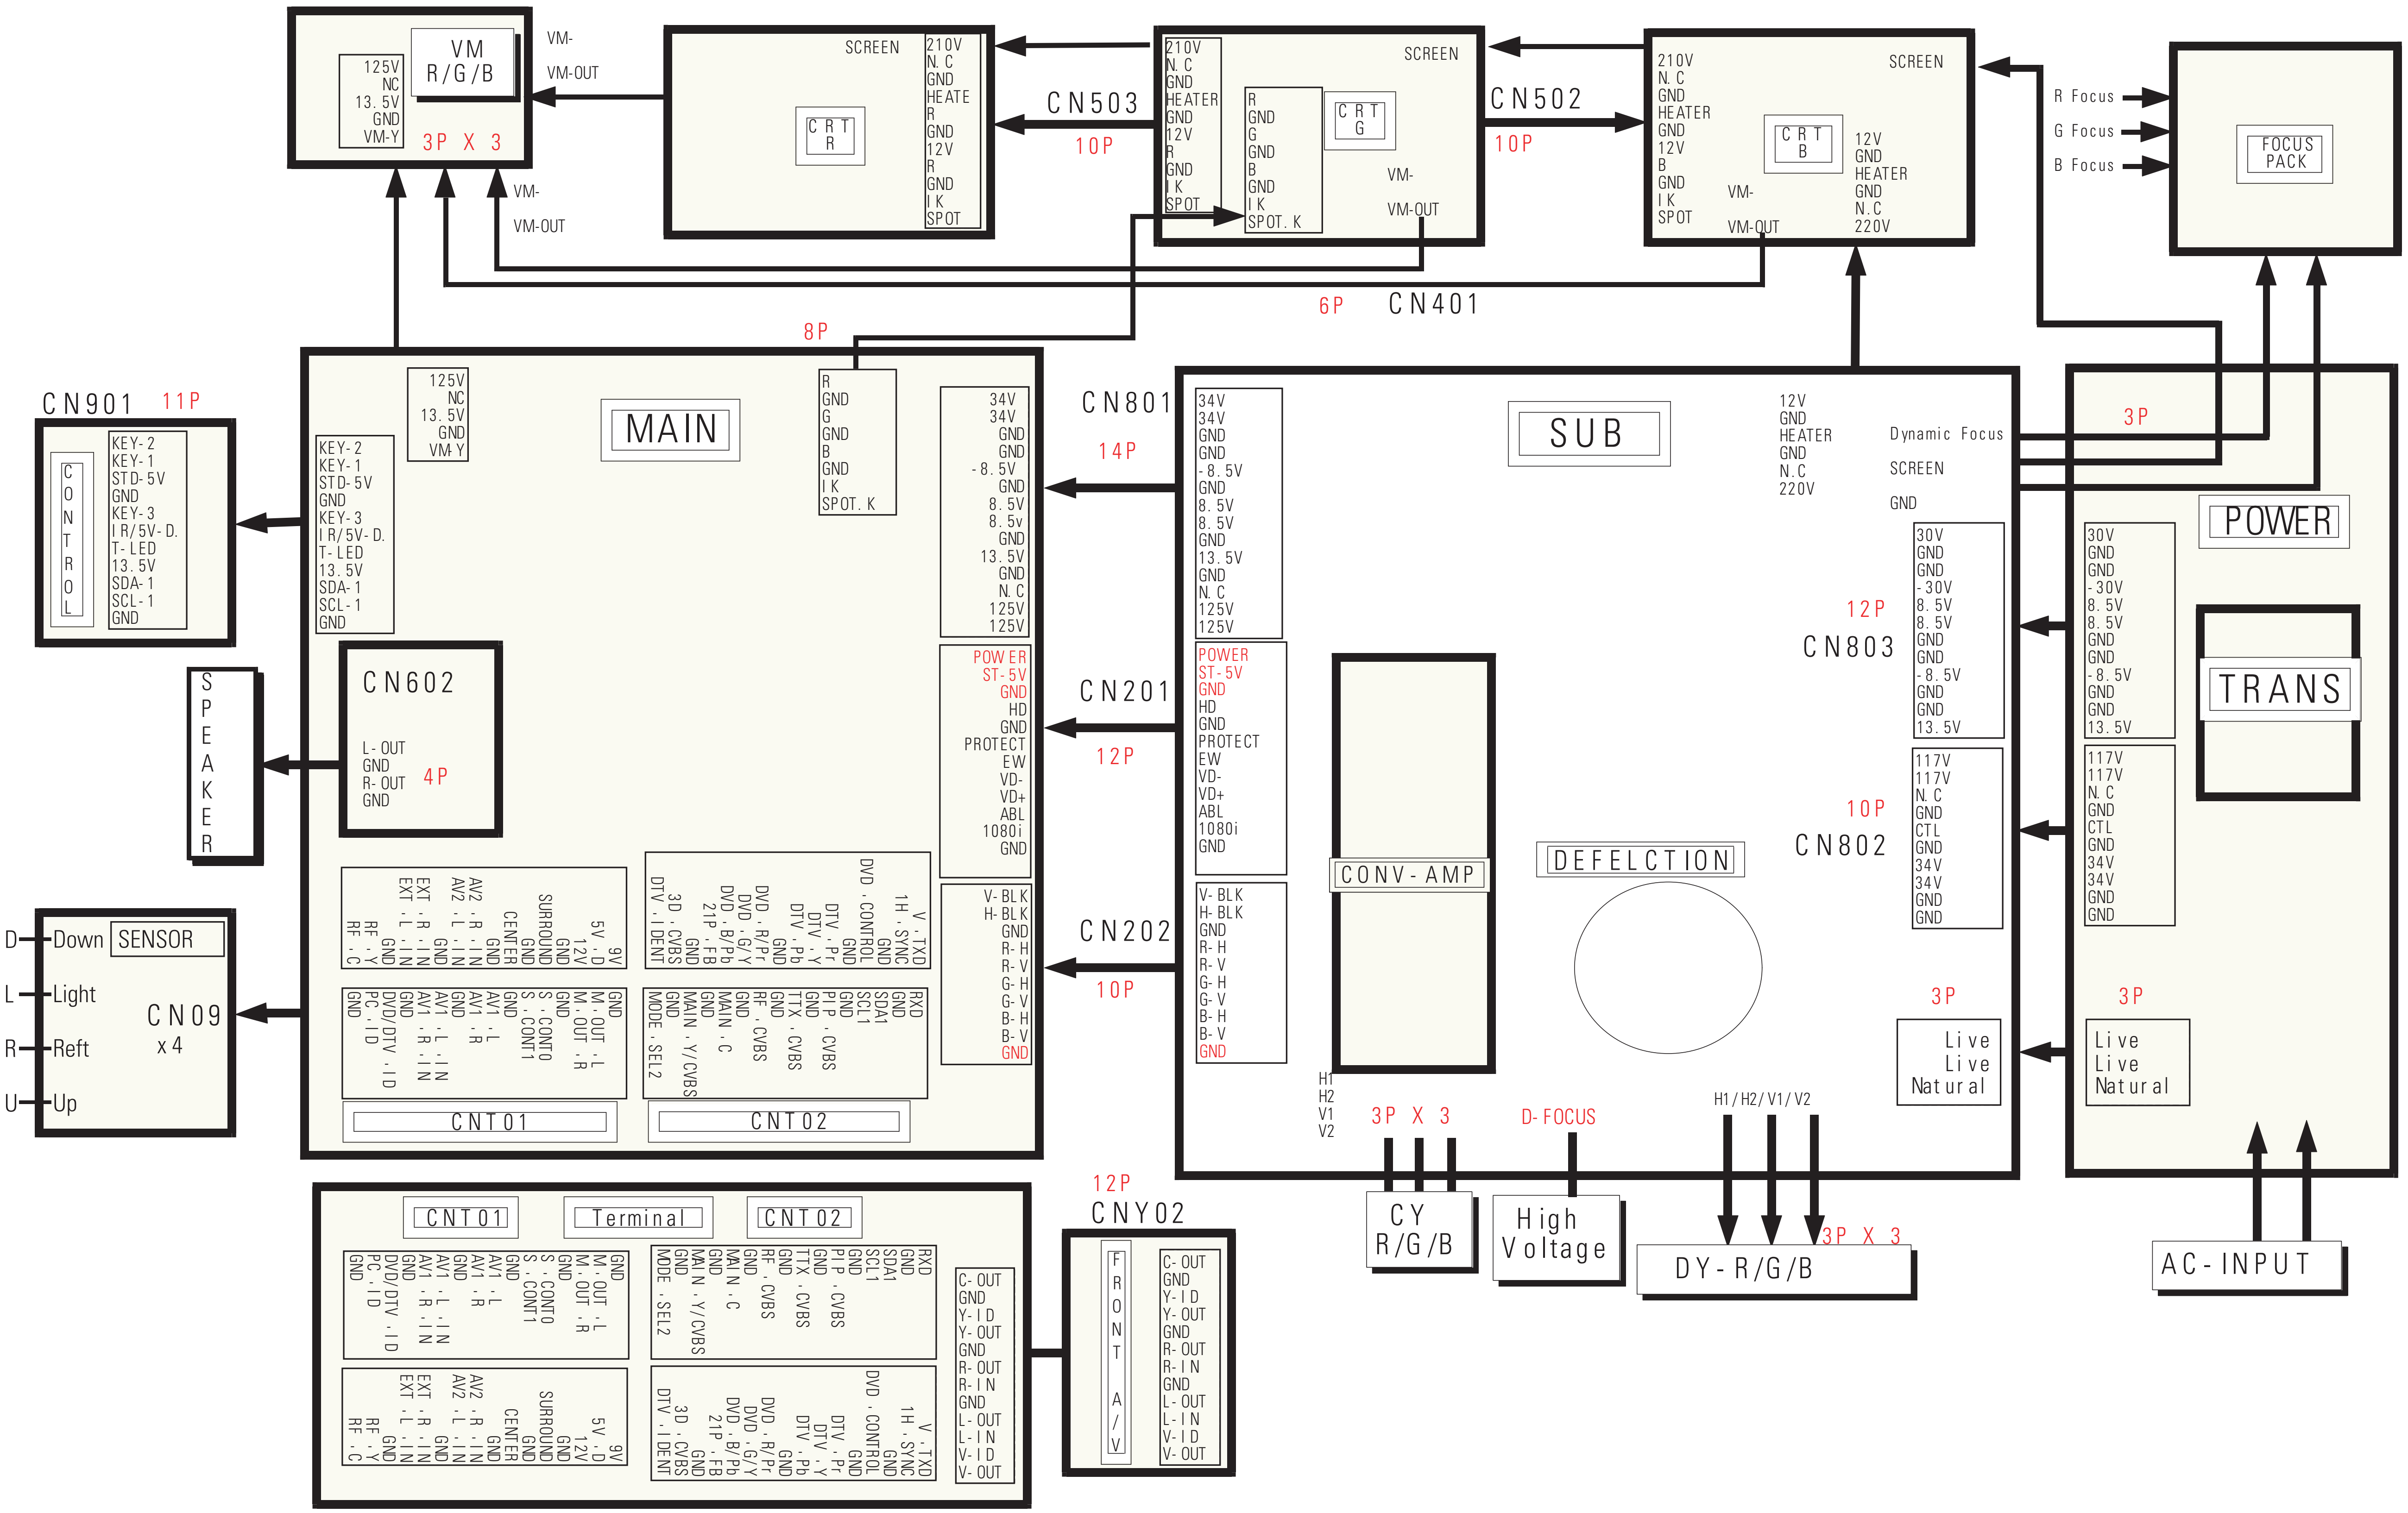


10. Schematic Diagrams

10-1 MAIN 1

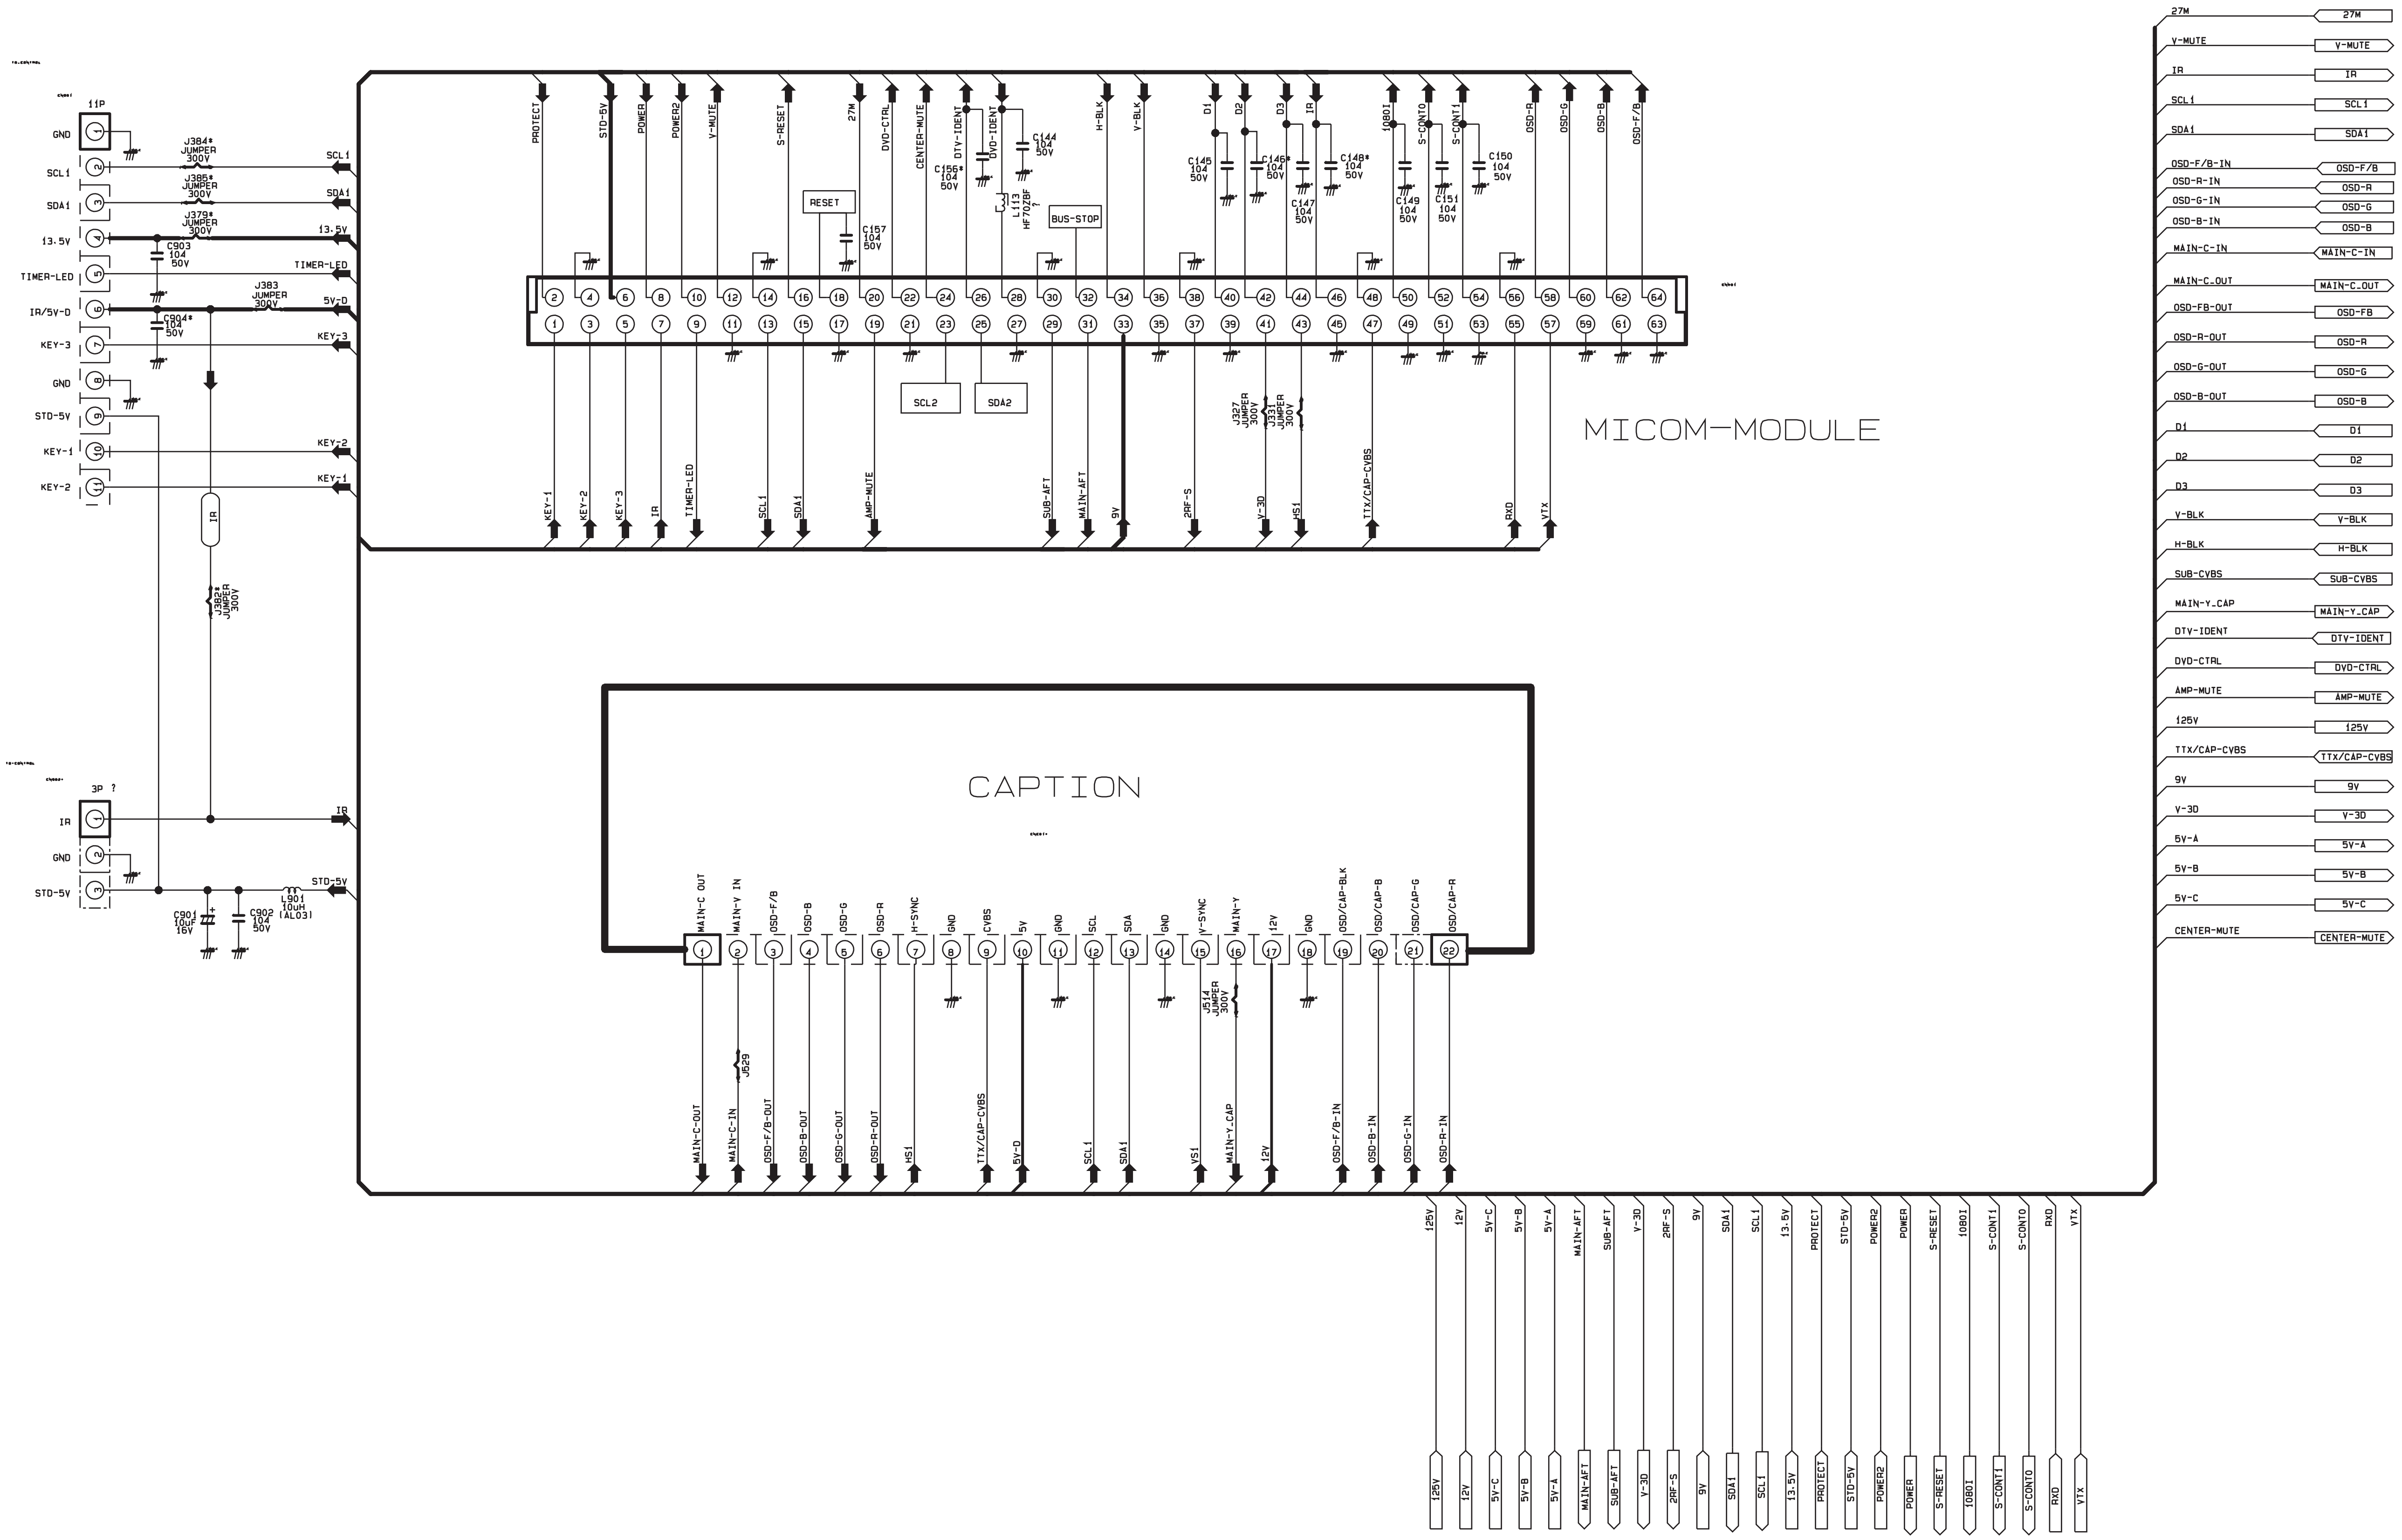


10-2 MAIN 2

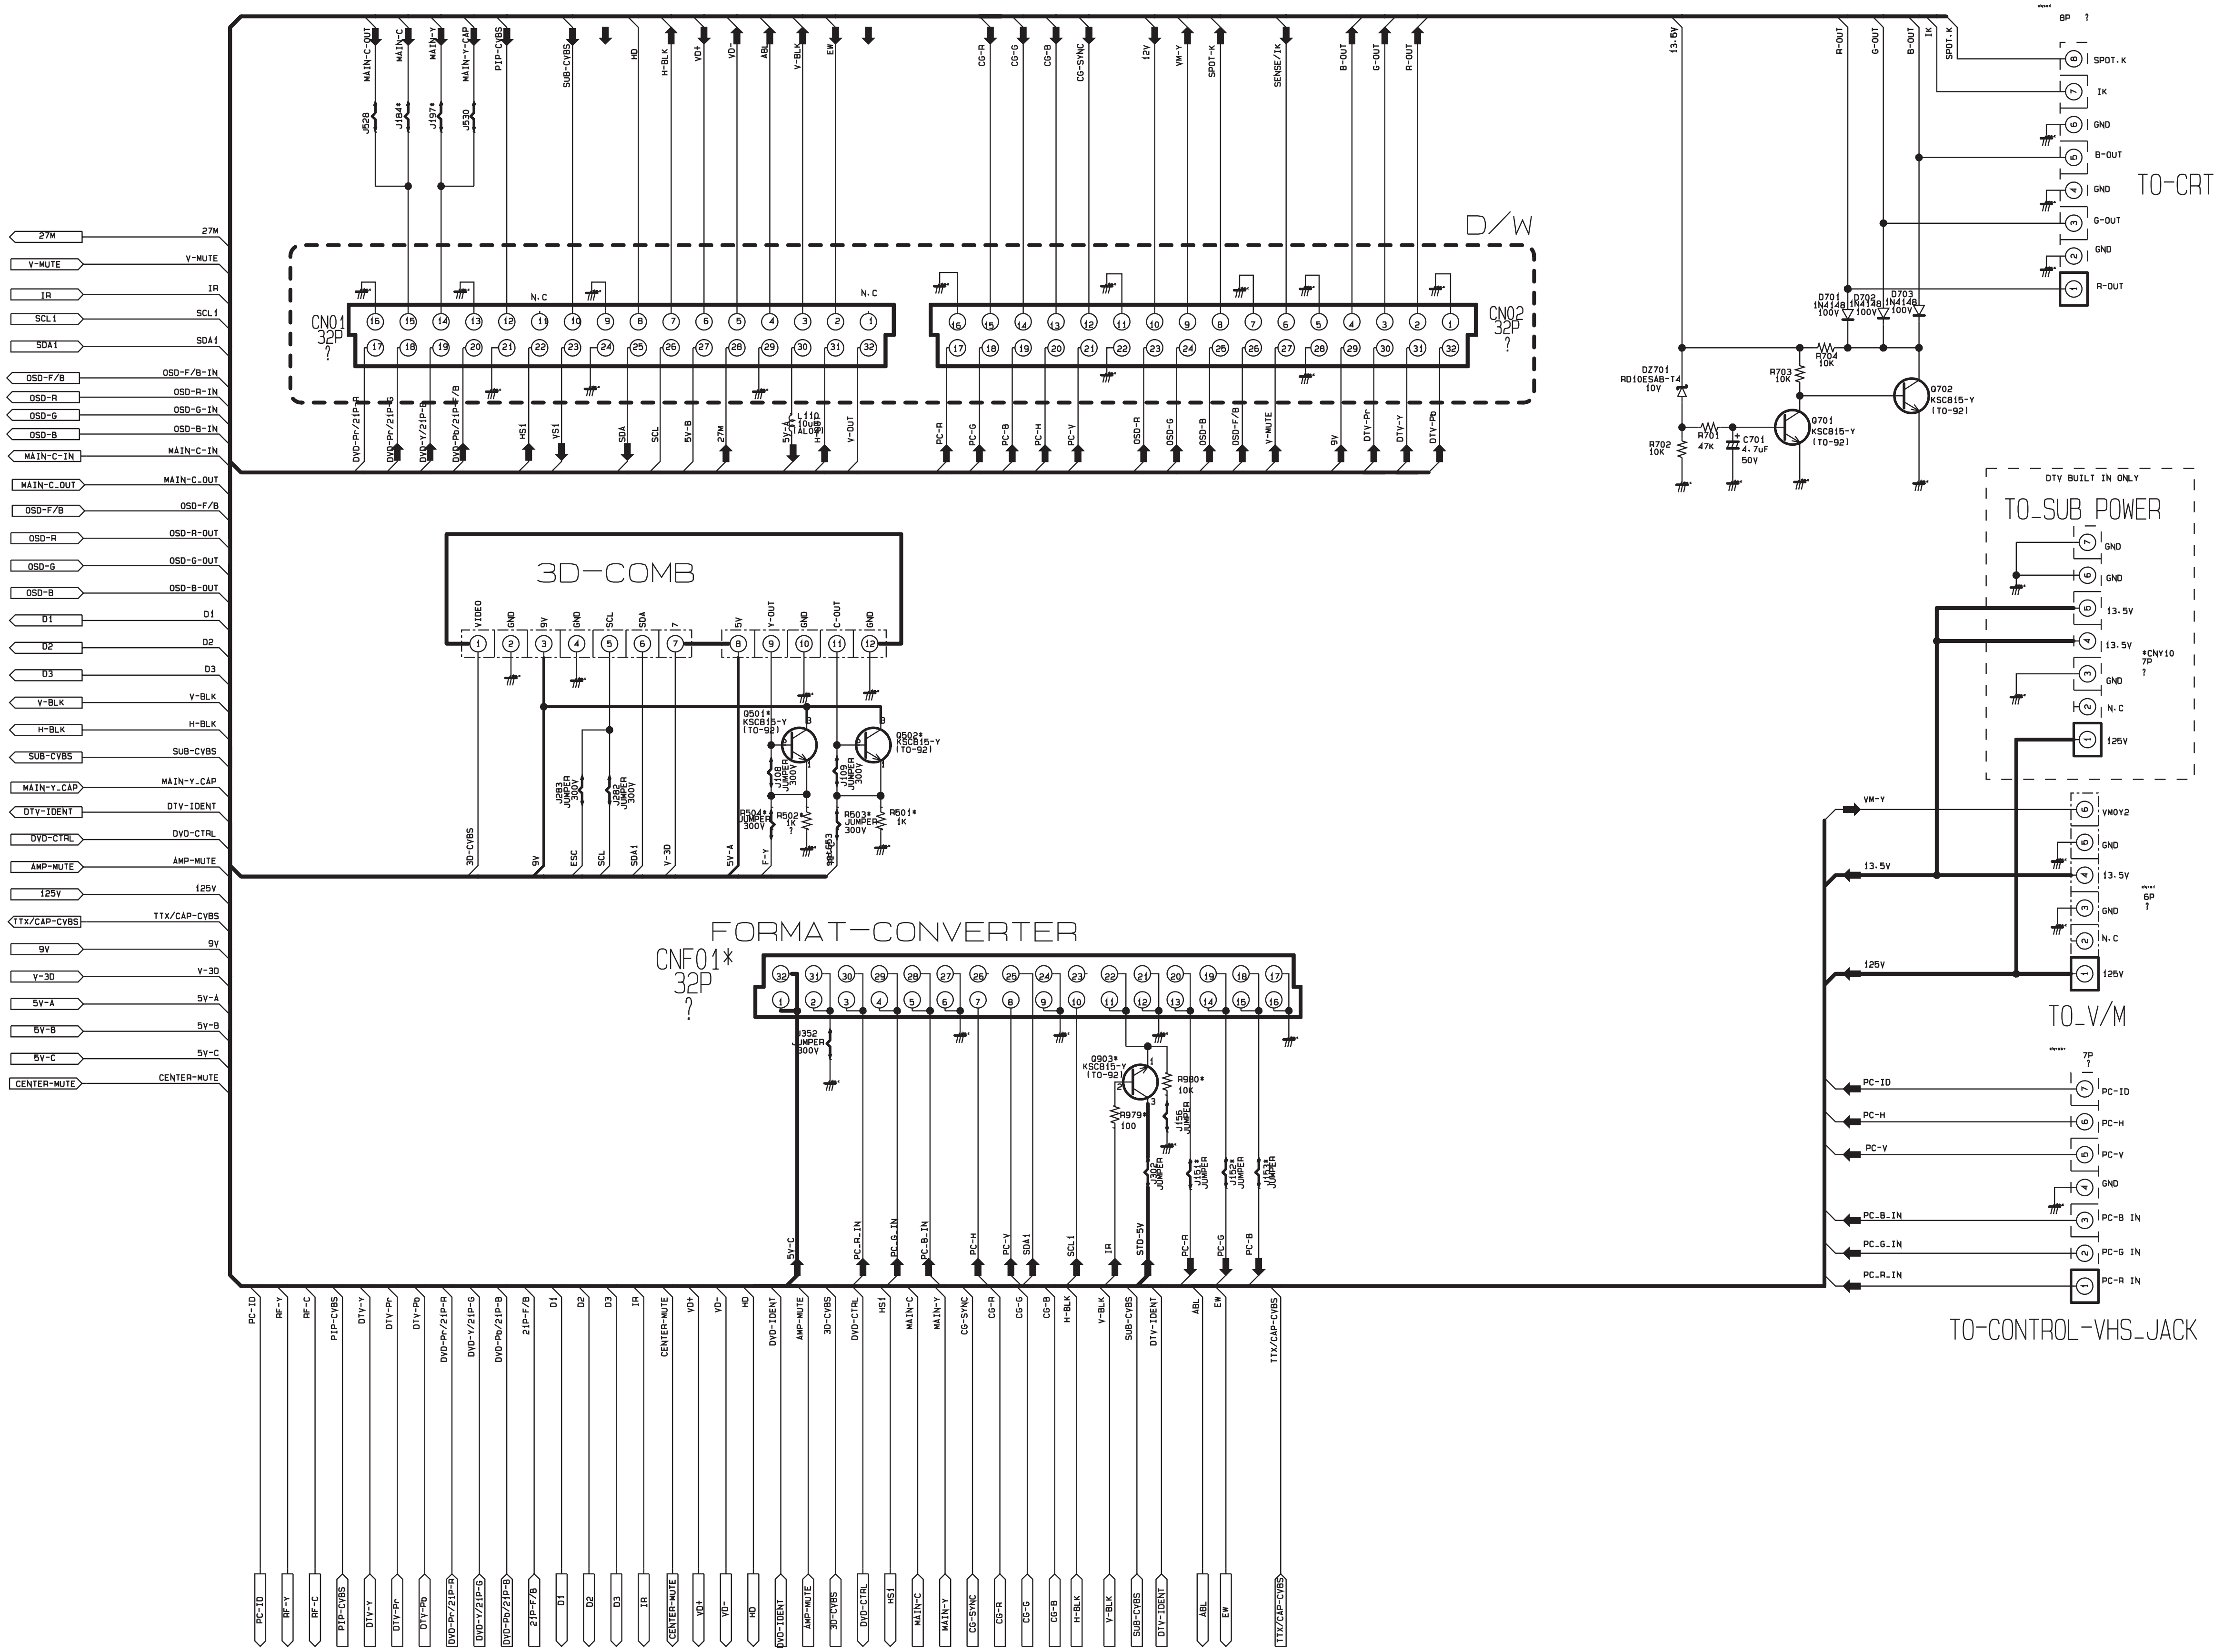


D/W
CN01 32P
CN02 32P
3D-COMB
FORMAT-CONVERTER
CNF01* 32P
TO-CRT
TO_SUB_POWER
DTV BUILT IN ONLY
TO_V/M
TO-CONTROL-VHS_JACK

10-3 MAIN 3

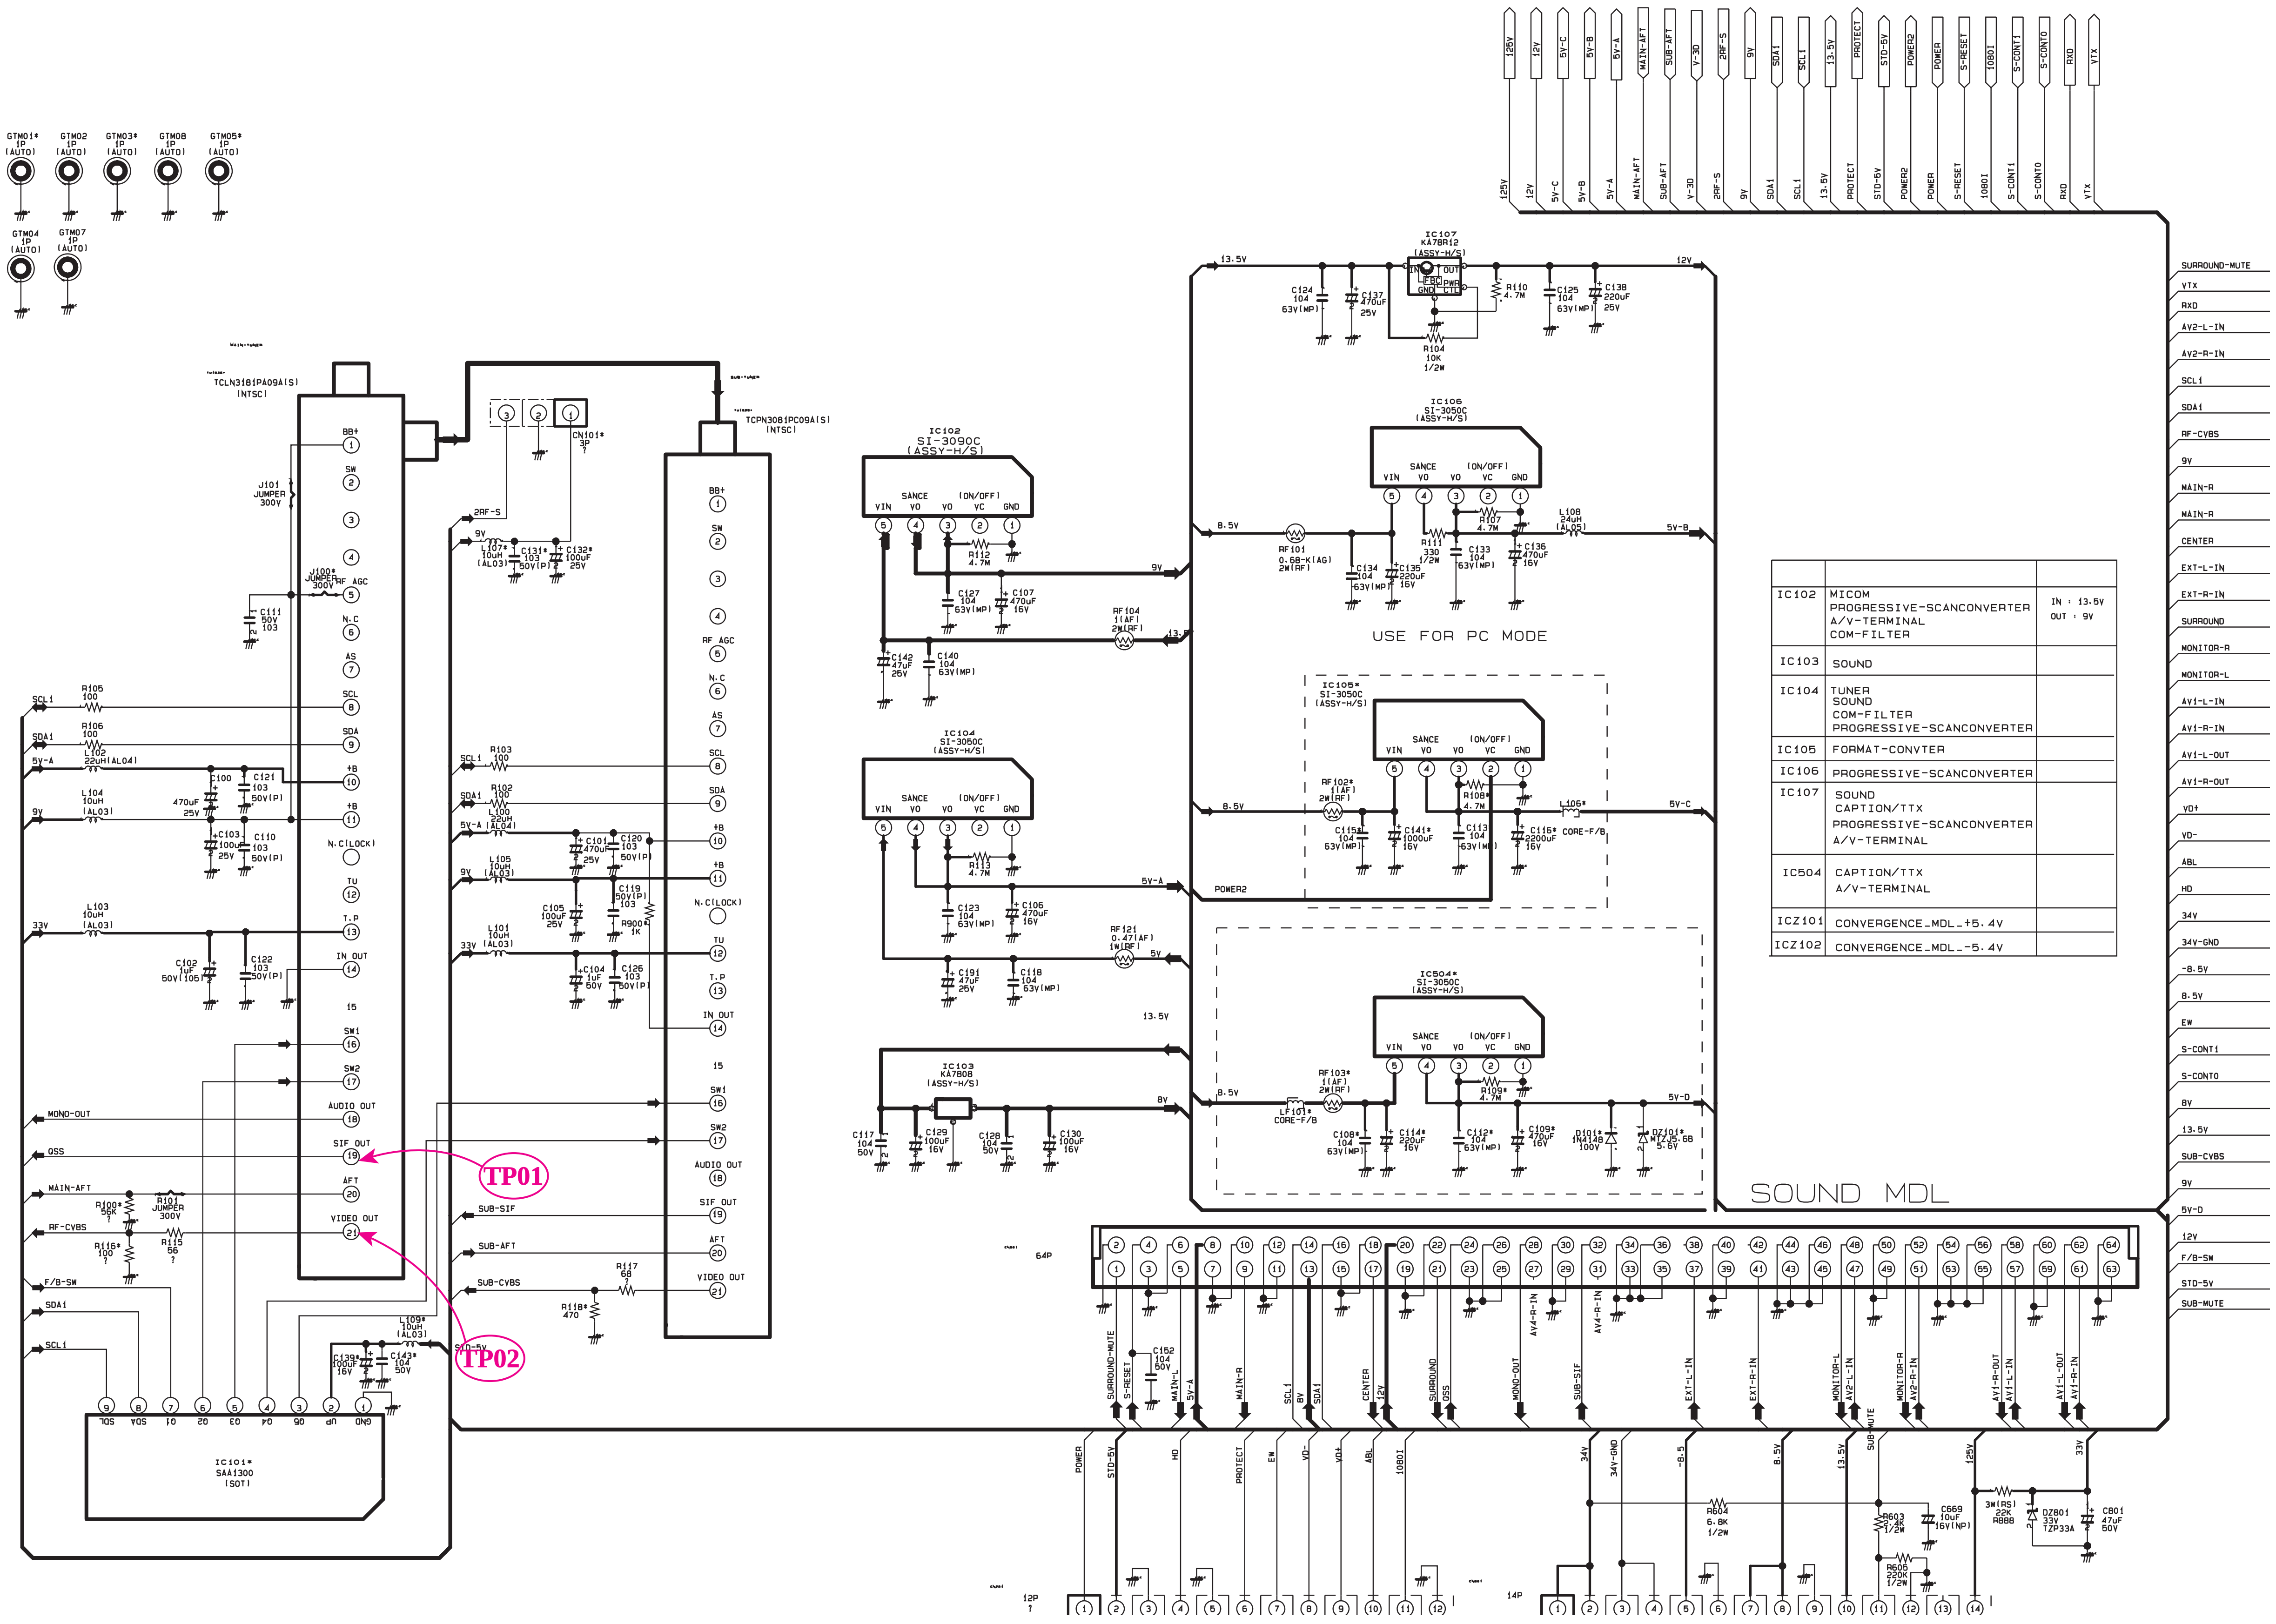


IC102	MICOM PROGRESSIVE-SCANCONVERTER A/V-TERMINAL COM-FILTER	IN : 13.5V OUT : 9V
IC103	SOUND	
IC104	TUNER SOUND COM-FILTER PROGRESSIVE-SCANCONVERTER	
IC105	FORMAT-CONVTER	
IC106	PROGRESSIVE-SCANCONVERTER	
IC107	SOUND CAPTION/TTX PROGRESSIVE-SCANCONVERTER A/V-TERMINAL	
IC504	CAPTION/TTX A/V-TERMINAL	
ICZ101	CONVERGENCE_MDL_+5.4V	
ICZ102	CONVERGENCE_MDL_-5.4V	


TP01




TP02





10-4 MAIN 4

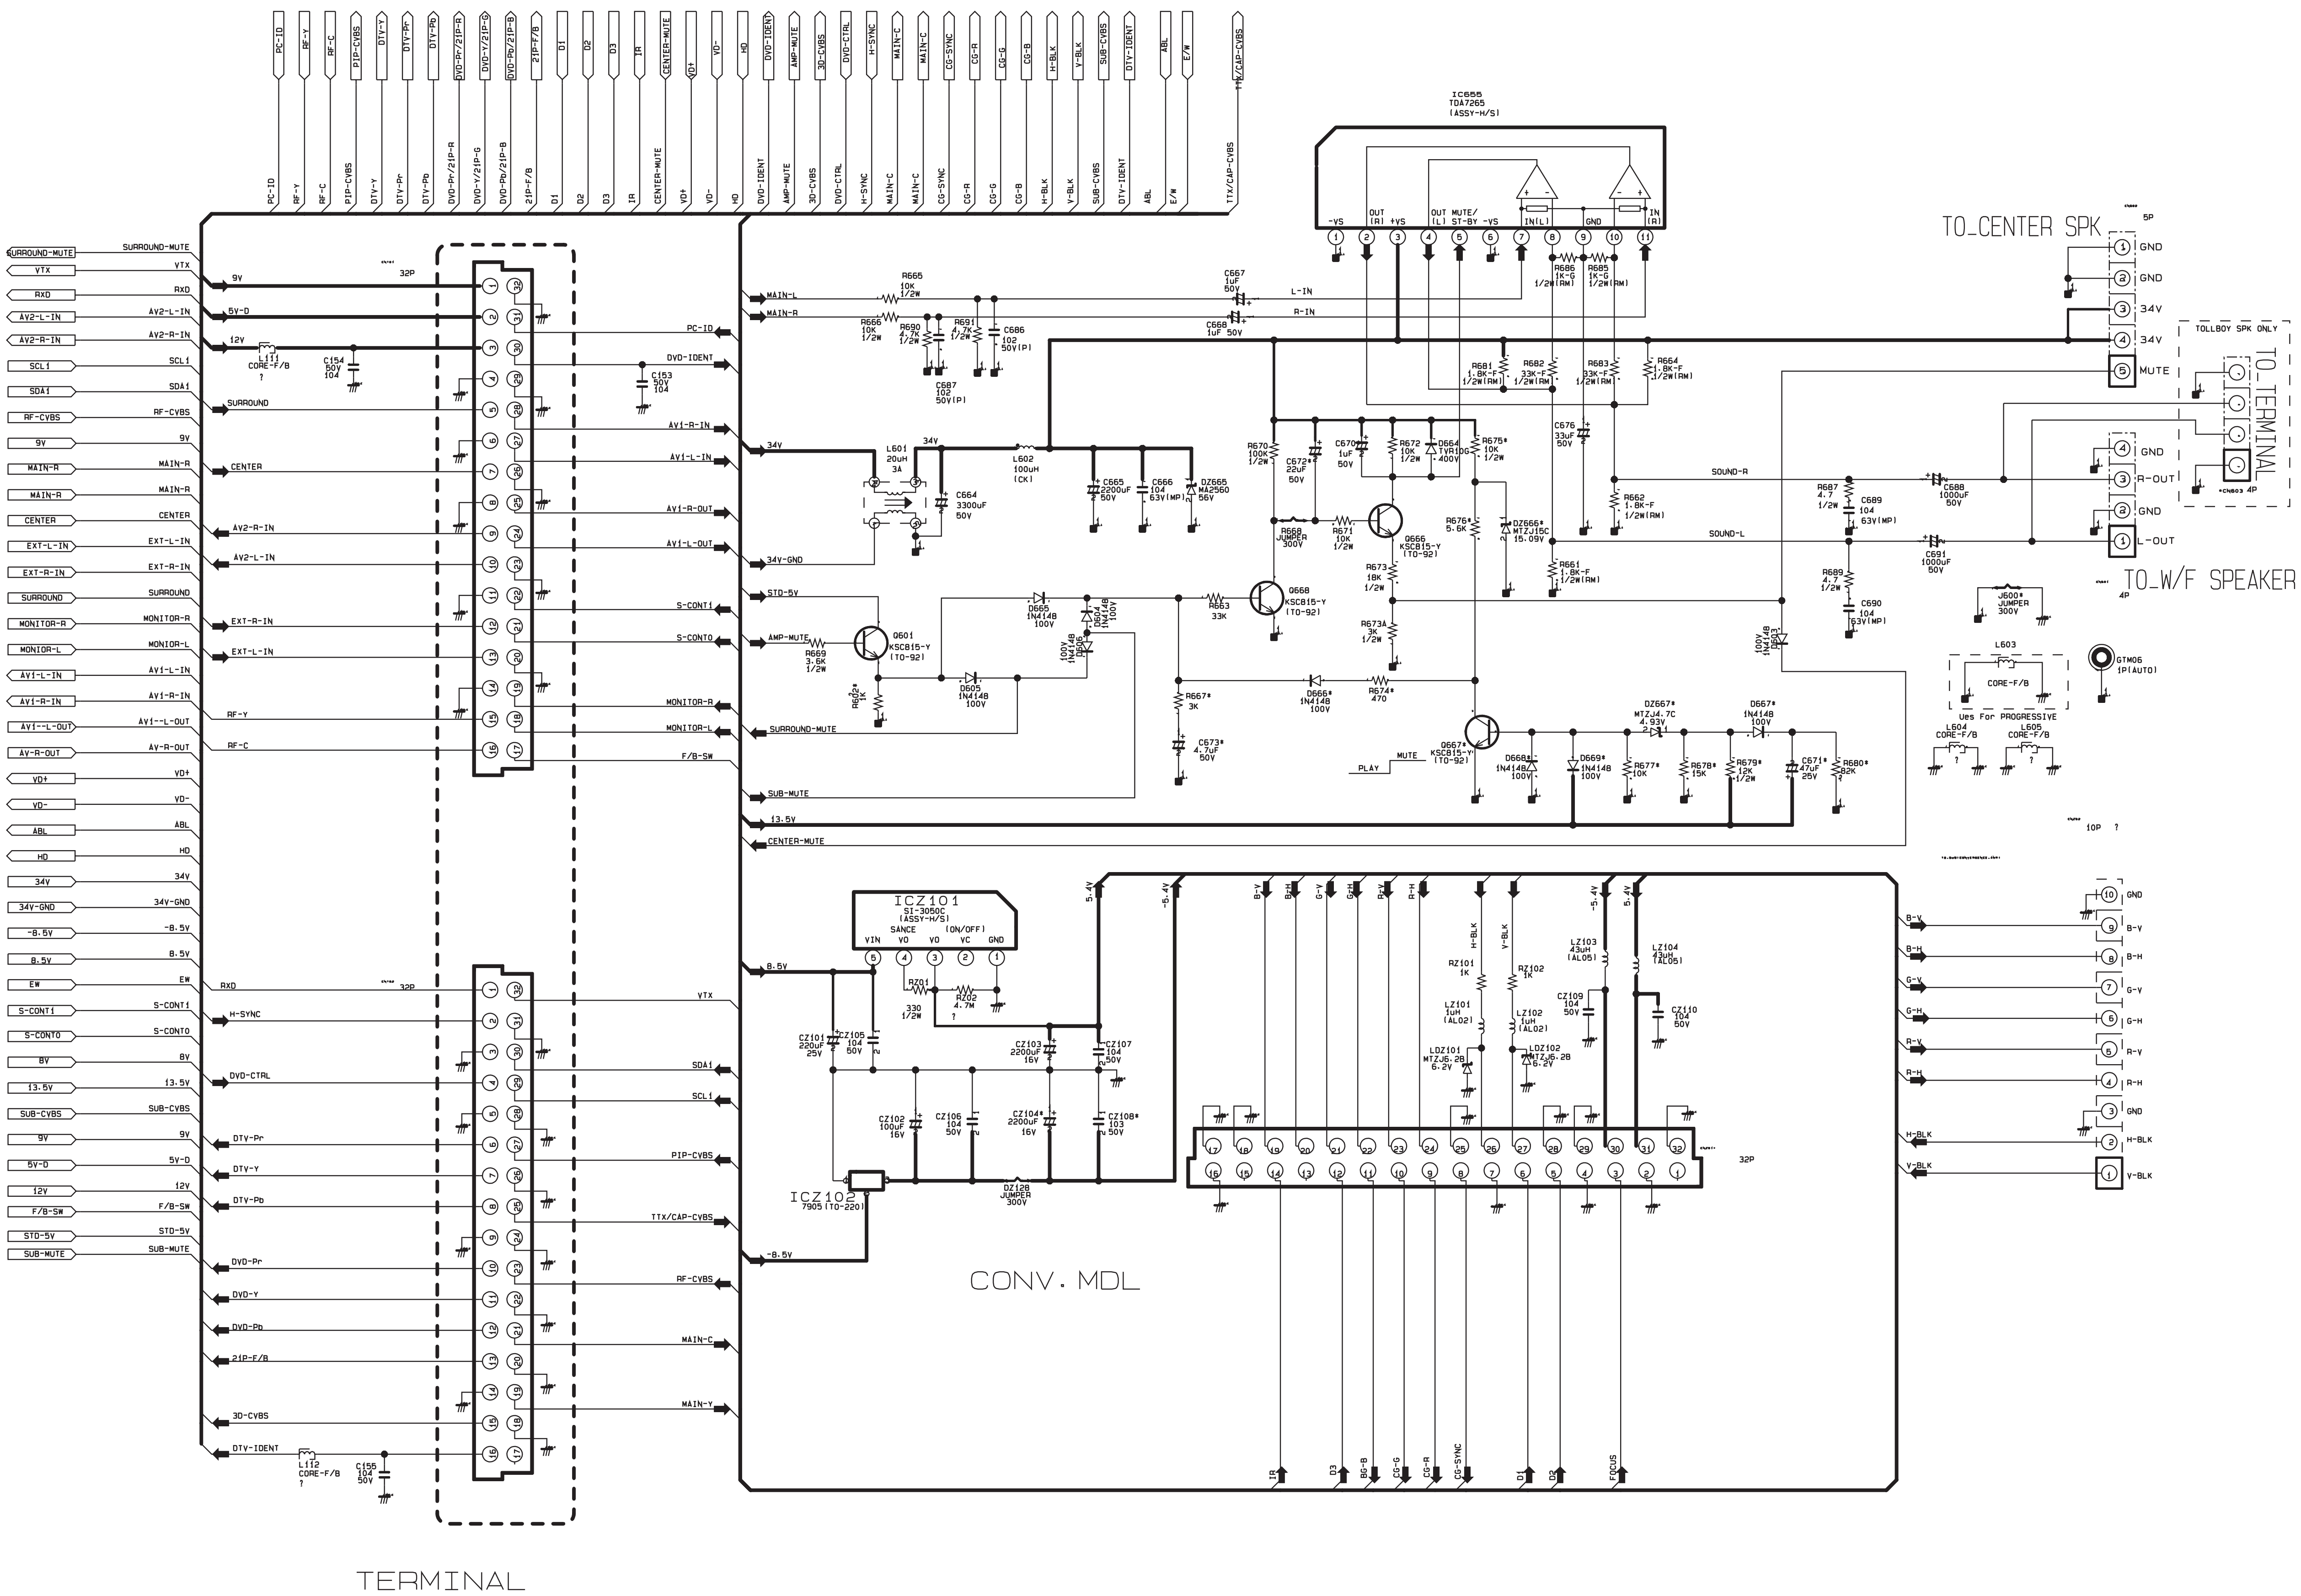
TERMINAL
CONV. MDL
TO_CENTER SPK
TO_W/F SPEAKER
TO_TERMINAL
IC655
TDA7265
ICZ101
SI-3050C
ICZ102
7905 (TO-220)


10-5 MICOM

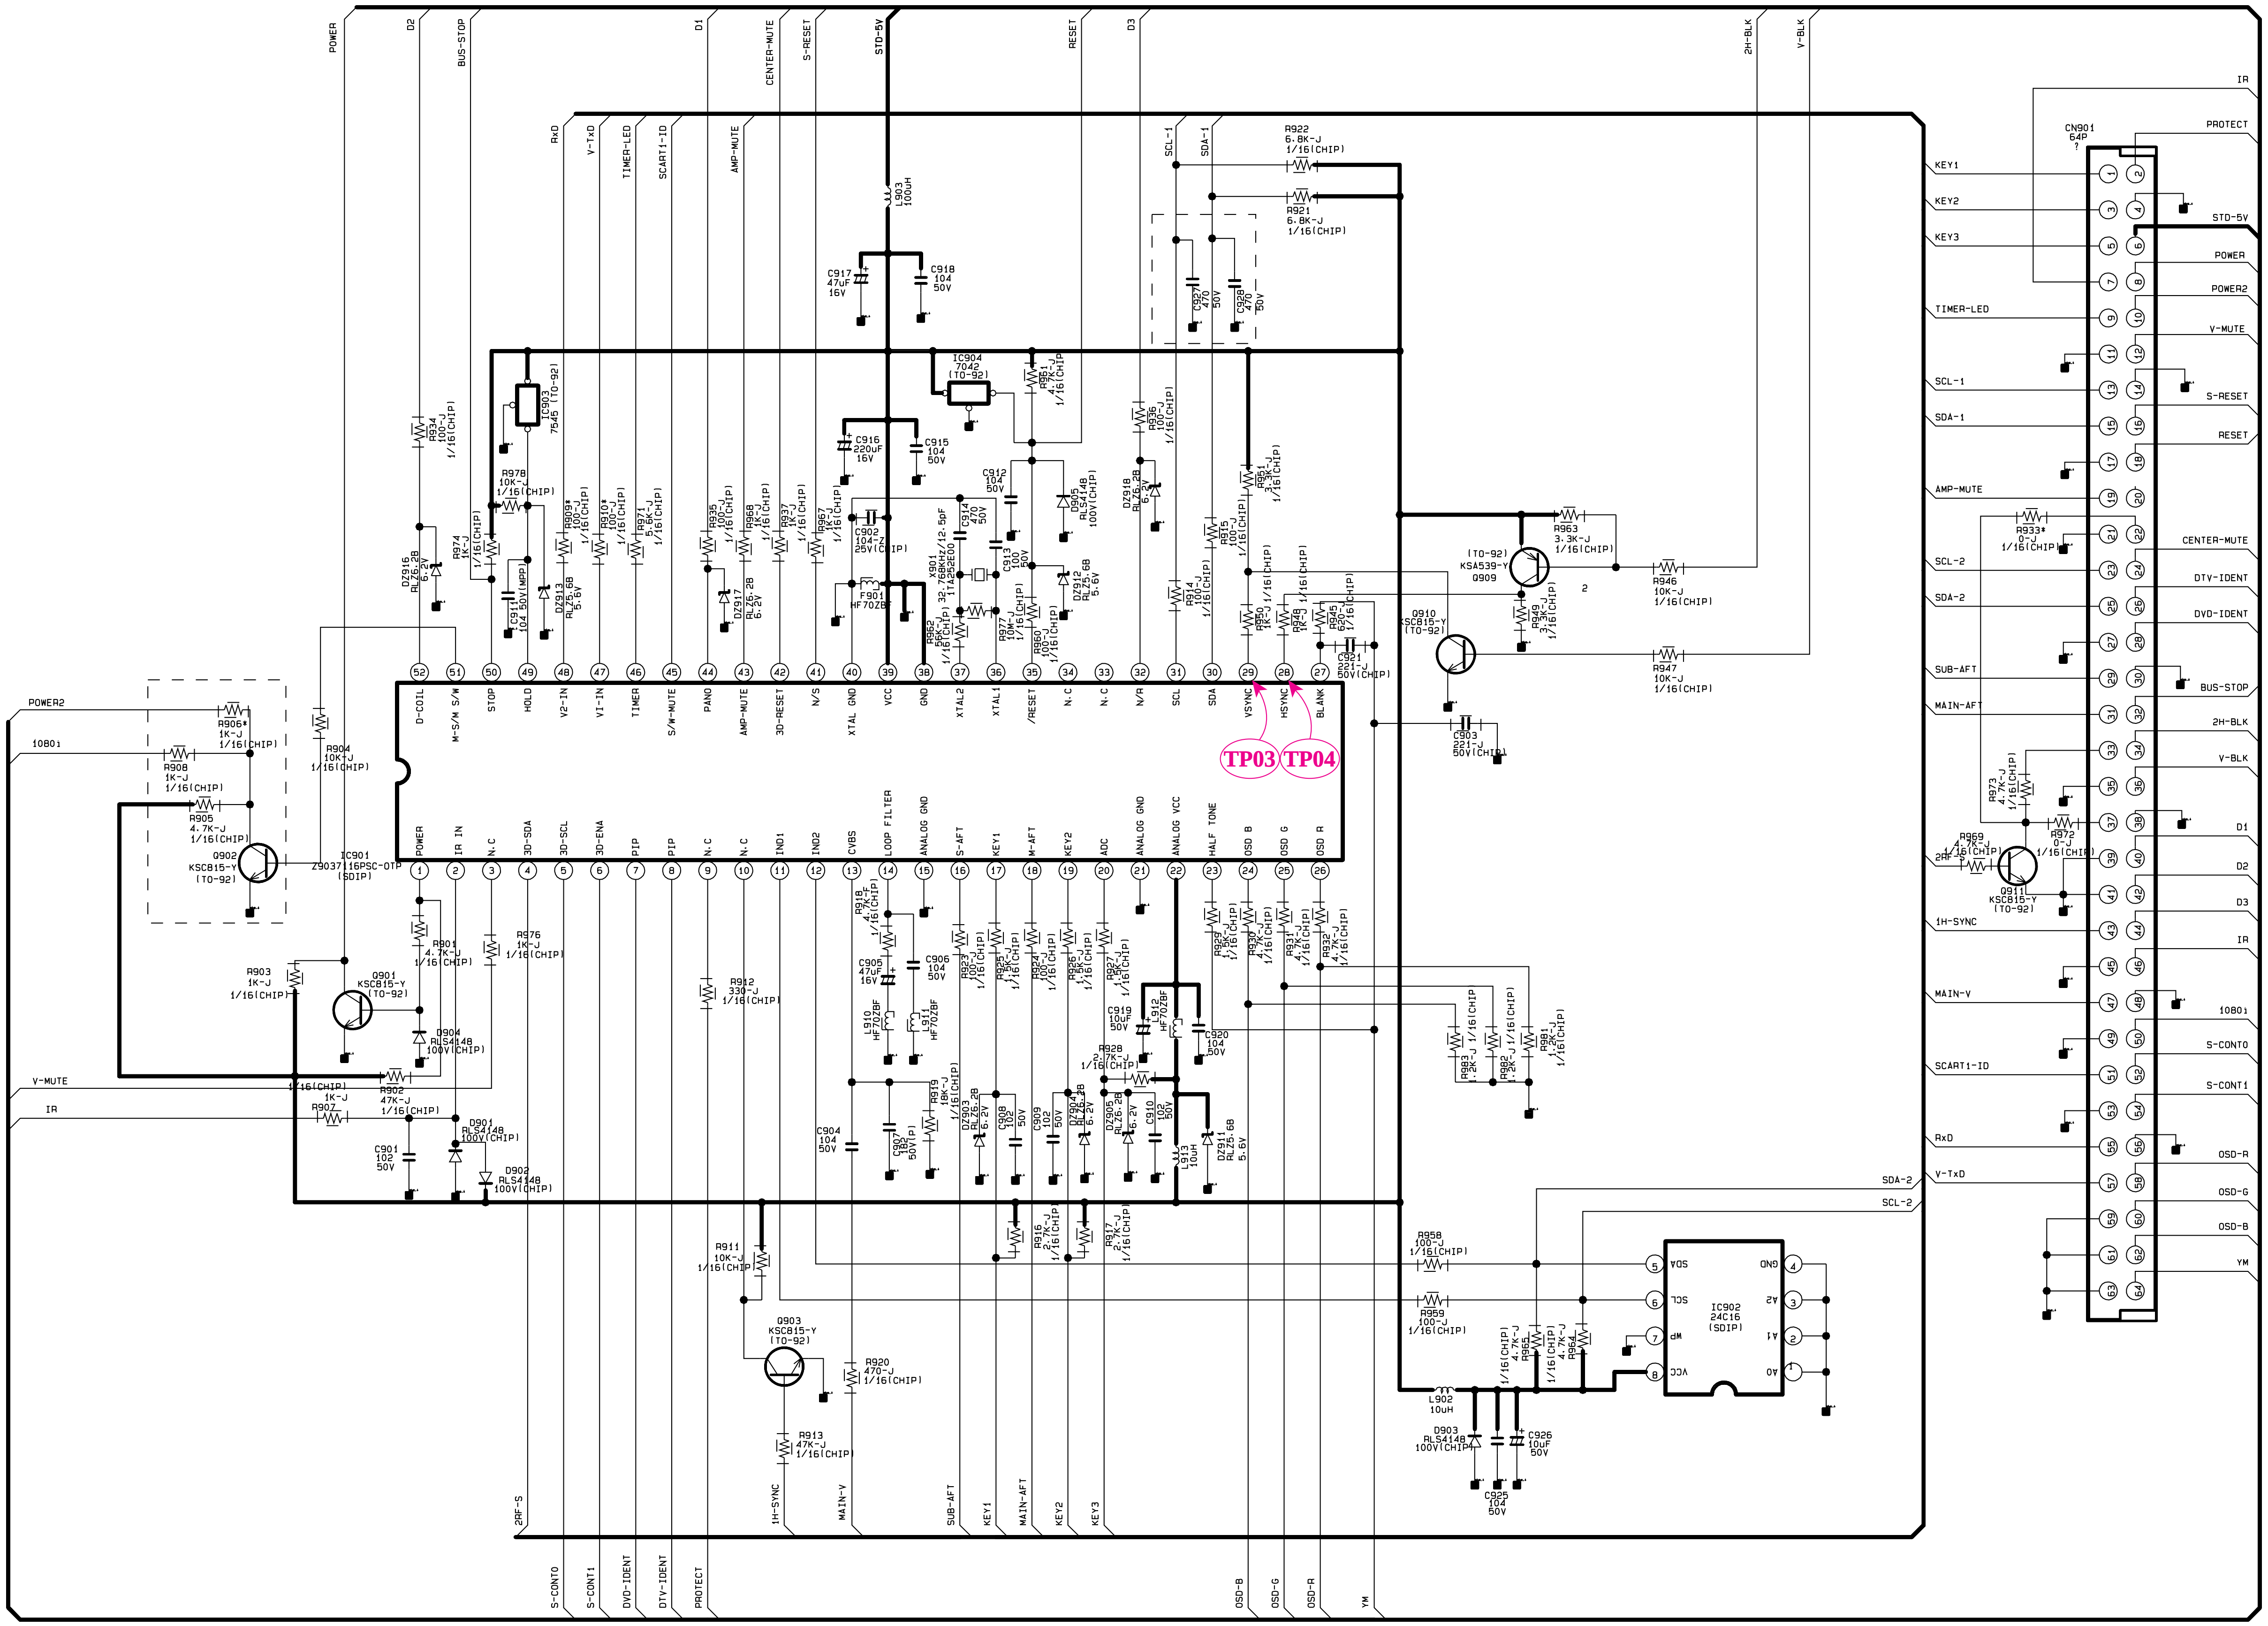






10-6 POWER

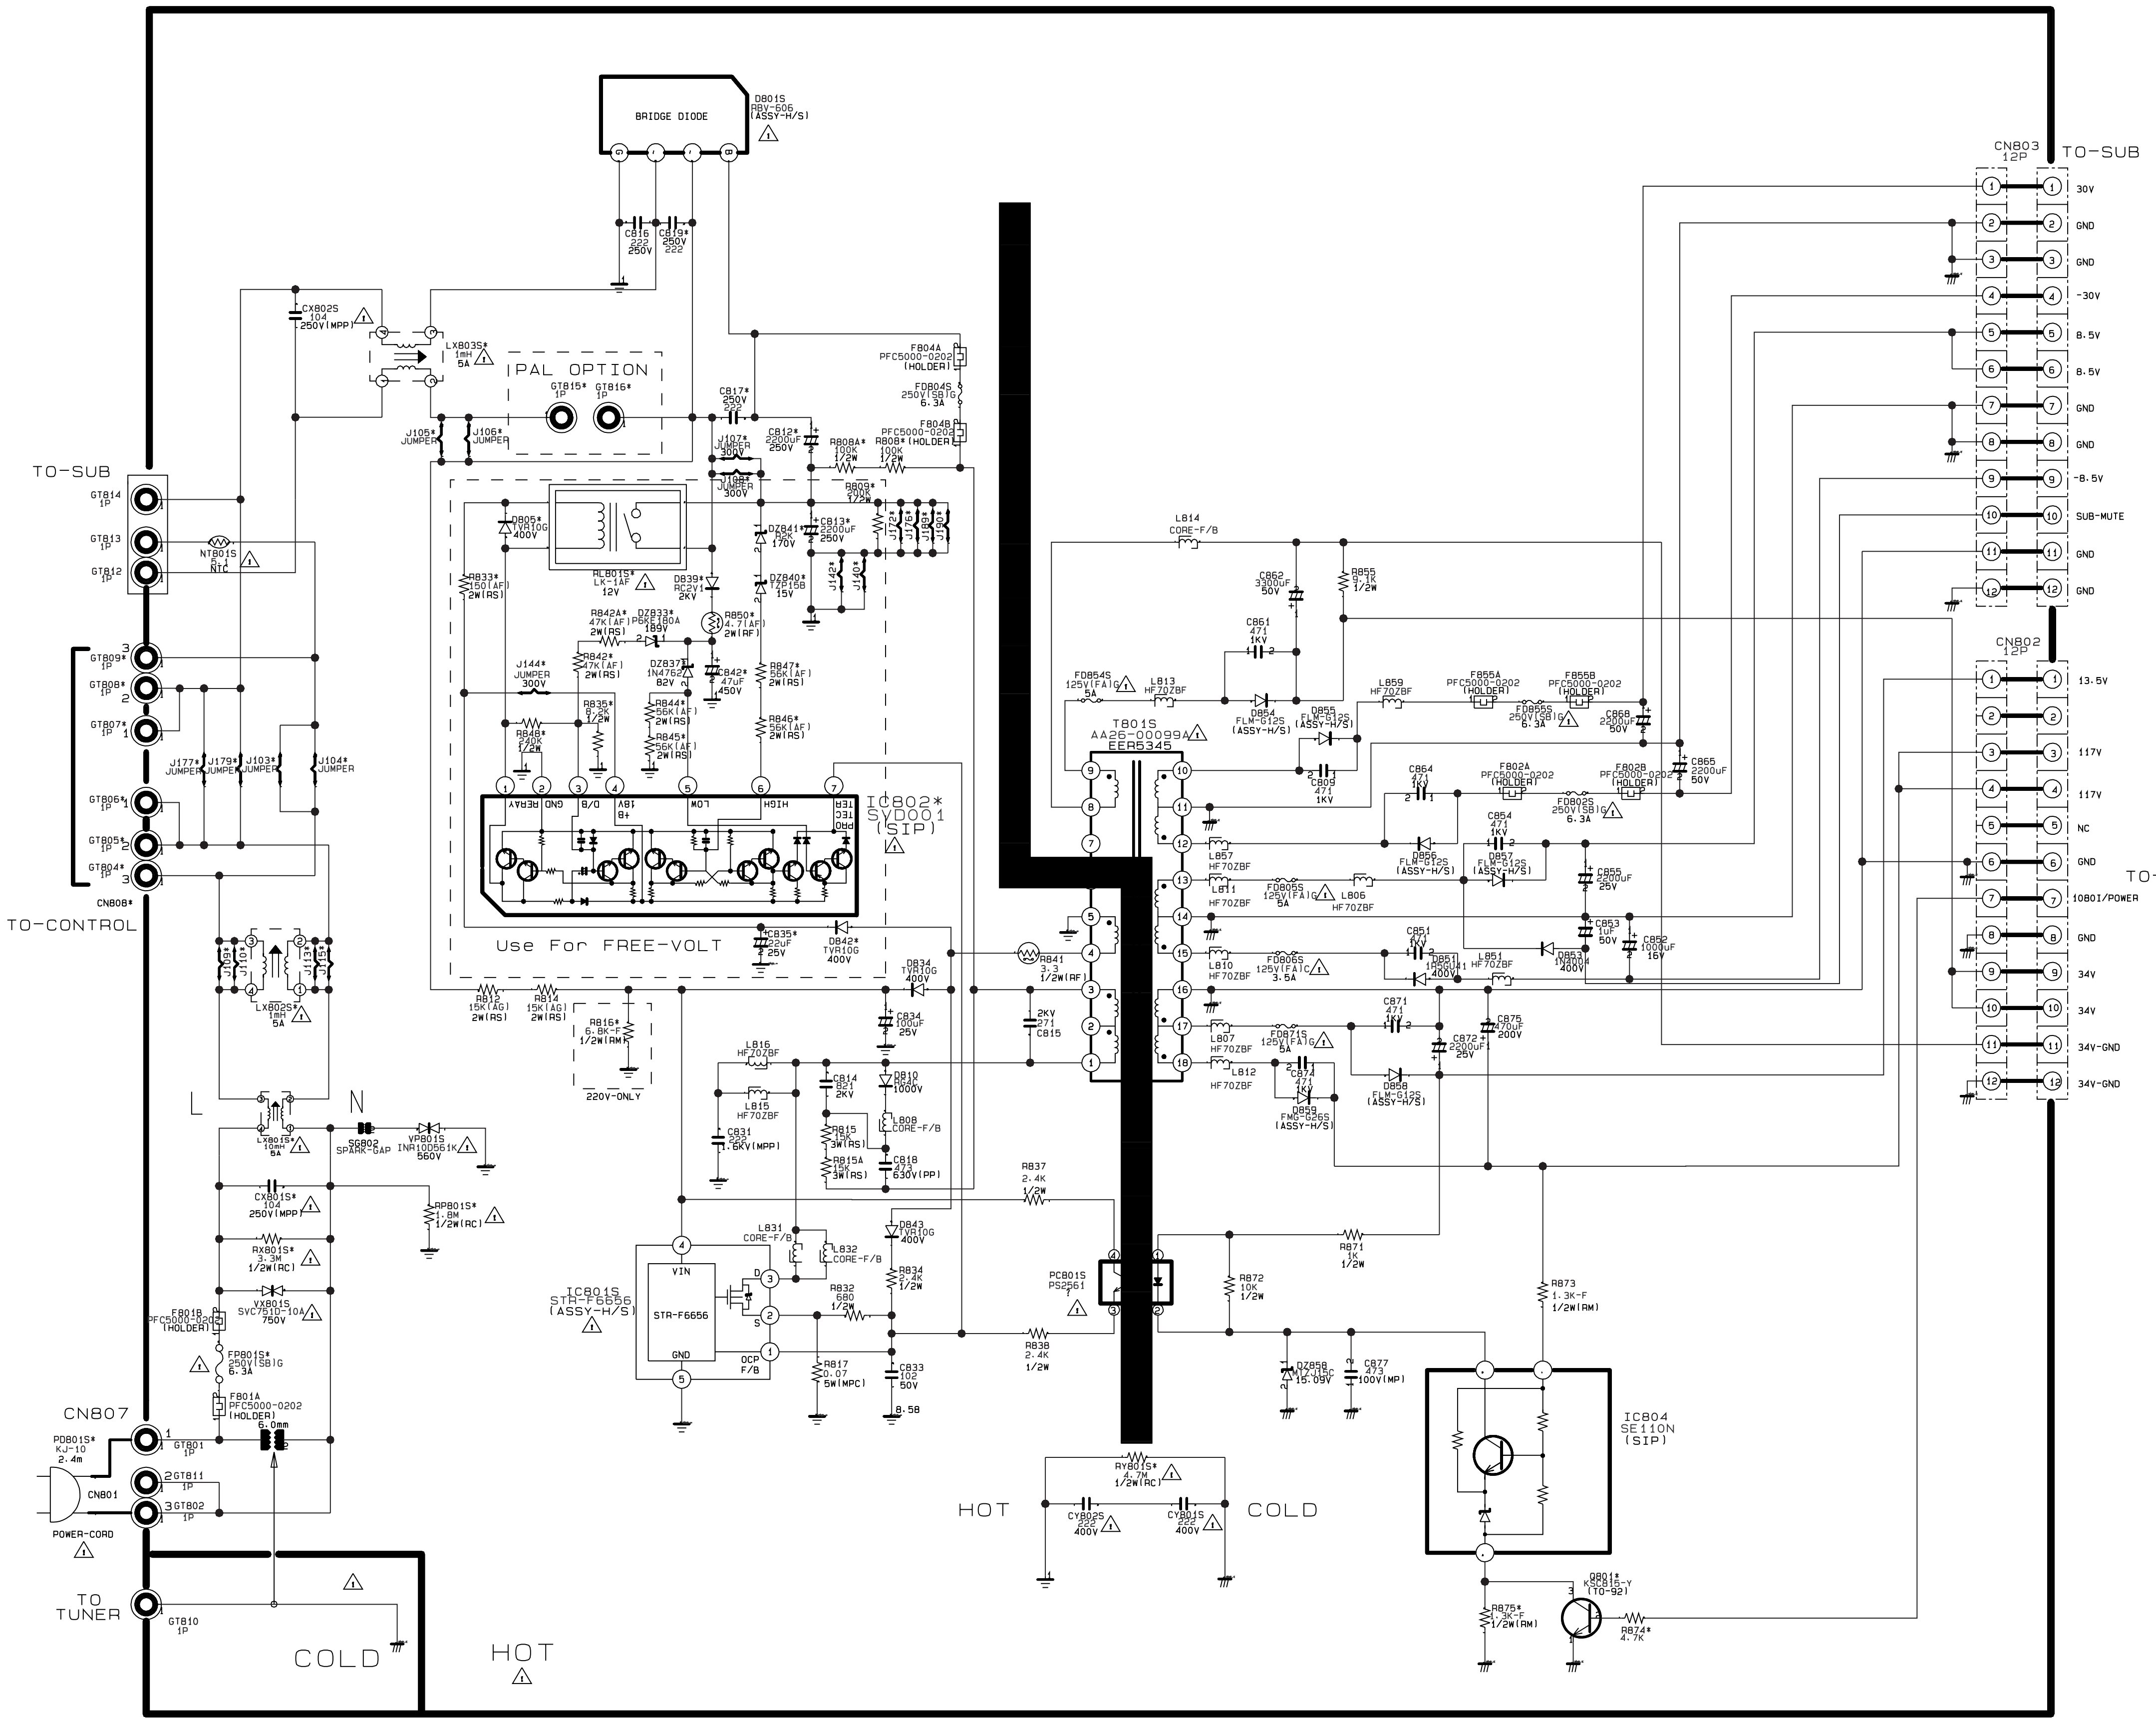


LOC	FREE	220V	120V
C812	2401-000701 2200uF 250V	2401-003465 680uF 450v	2401-000701 2200uF 250V
C813	2401-000701 2200uF 250V	DELETE	2401-000701 2200uF 250V
C835	2401-000030 22uF 25V	DELETE	DELETE
C842	2401-003370 47uF 450V	DELETE	DELETE
D805	0402-000546 TVR10G	DELETE	DELETE
D839	0402-000243 RC2-V1	DELETE	DELETE
D842	0402-000546 TVR10G	DELETE	DELETE
DZ833	0406-001007 P6KE180A	DELETE	DELETE
DZ837	0403-000170 1N4762	DELETE	DELETE
DZ840	0403-001039 MA2560	DELETE	DELETE
DZ841	0403-000691 R2K 170V	DELETE	DELETE
IC802	AA13-00033A IC-HYBRID SVD001	DELETE	DELETE
R809	2001-000002 200K 1/2W(CARBON)	DELETE	DELETE
R816	2004-004029 10K 1/2W-F(METAL)	2004-004029 10K 1/2W-F(METAL)	DELETE
R833	2003-001024 150 2W(METAL)	DELETE	DELETE
R835	2001-001188 8.2K 1/2W(CARBON)	DELETE	DELETE
R842	2003-001040 47K 2W(METAL)	DELETE	DELETE
R842A	2003-001040 47K 2W(METAL)	DELETE	DELETE
R844	2003-002020 56K 2W(METAL)	DELETE	DELETE
R845	2003-002020 56K 2W(METAL)	DELETE	DELETE
R846	2003-002020 56K 2W(METAL)	DELETE	DELETE
R847	2003-002020 56K 2W(METAL)	DELETE	DELETE
R850	2008-001079 4.7 2W RF(FUSIBLE)	DELETE	DELETE
RL801S	3501-001040 RELAY-POWER 12VDC	DELETE	DELETE
R808	2001-000085 100K 1/2W(CARBON)	2001-000002 200K 1/2W(CARBON)	2001-000085 100K 1/2W(CARBON)
R808A	2001-000085 100K 1/2W(CARBON)	2001-000002 200K 1/2W(CARBON)	2001-000085 100K 1/2W(CARBON)
J140	3812-000219 JUMPER	DELETE	3812-000219 JUMPER
J142	3812-000219 JUMPER	DELETE	3812-000219 JUMPER
J172	DELETE	3812-000219 JUMPER	DELETE
J176	DELETE	3812-000219 JUMPER	DELETE
R809	2001-000002 200K 1/2W(CARBON)	DELETE	2001-000002 200K 1/2W(CARBON)
J107	DELETE	DELETE	3812-000219 JUMPER
J108	DELETE	DELETE	3812-000219 JUMPER
J144	3812-000219 JUMPER	DELETE	DELETE
J189	DELETE	3812-000219 JUMPER	DELETE
J190	DELETE	3812-000219 JUMPER	DELETE
LX802S	AA29-30002M 1mH 5A	AA29-30002F 6mH 2.5A	AA29-30002M 1mH 5A
LX803S	AA29-30002M 1mH 5A	AA29-00008A 6mH 3A	AA29-30002M 1mH 5A

10-7 SOUND

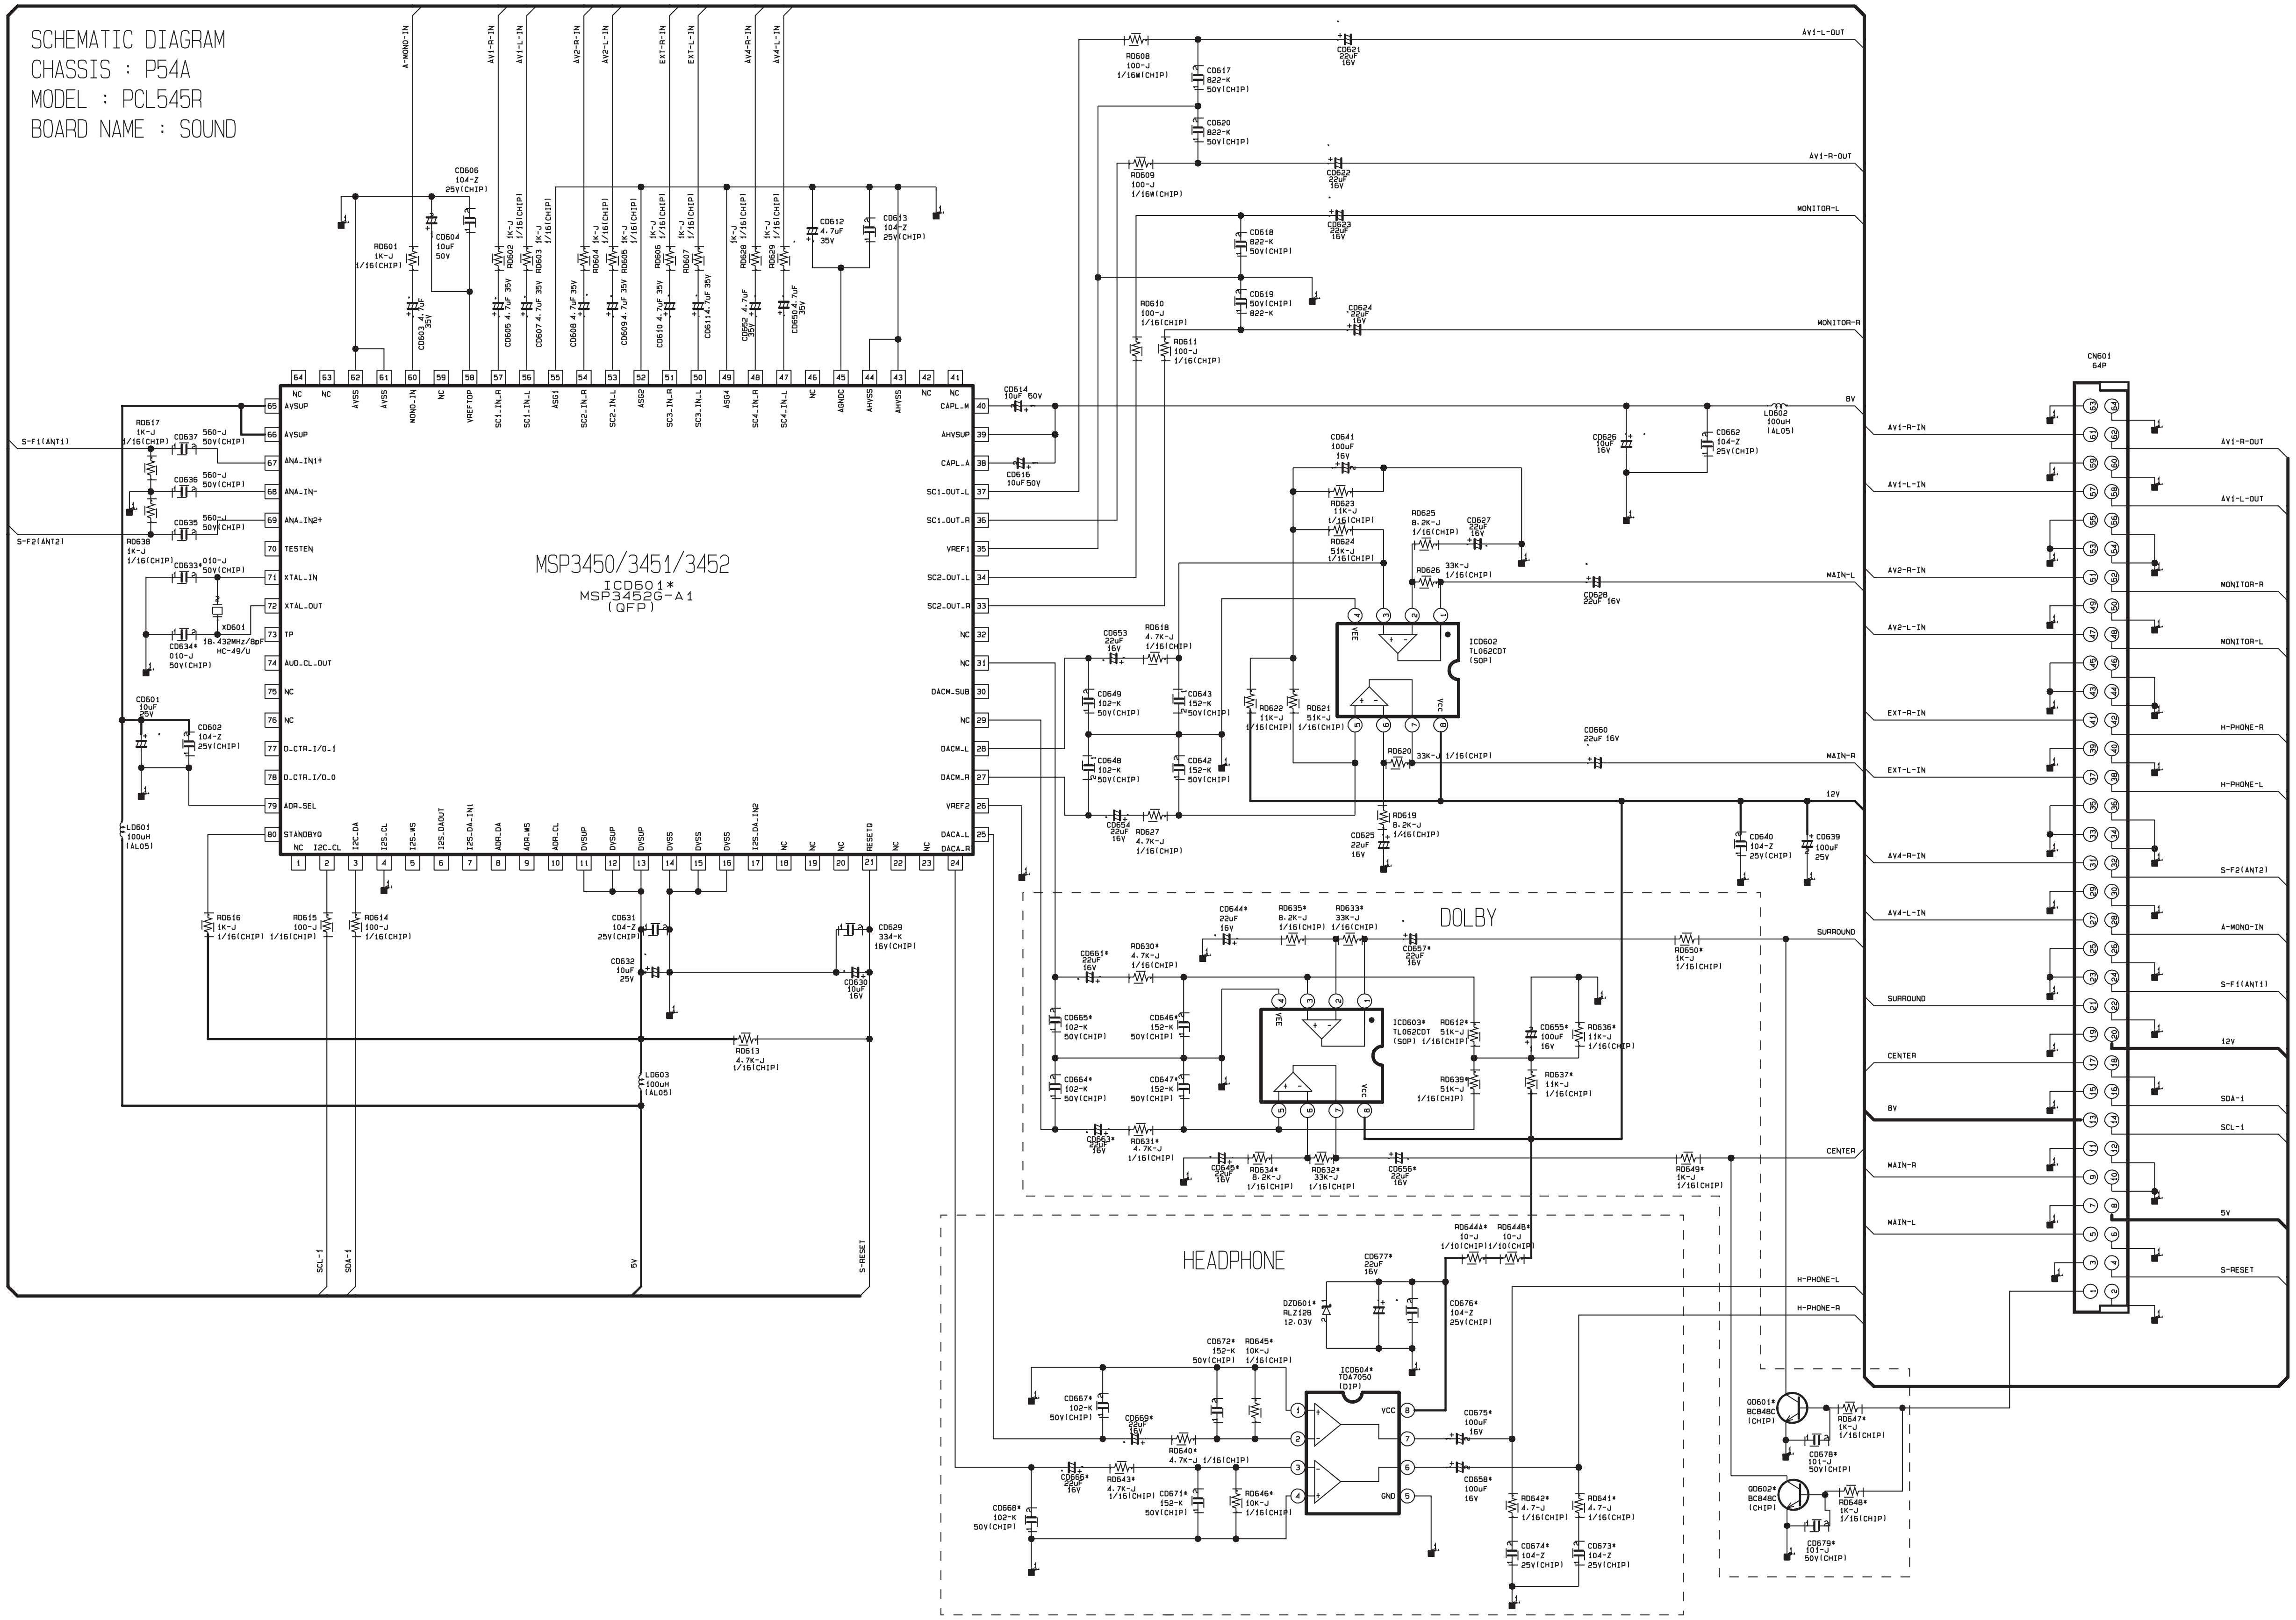


10-8 CRT

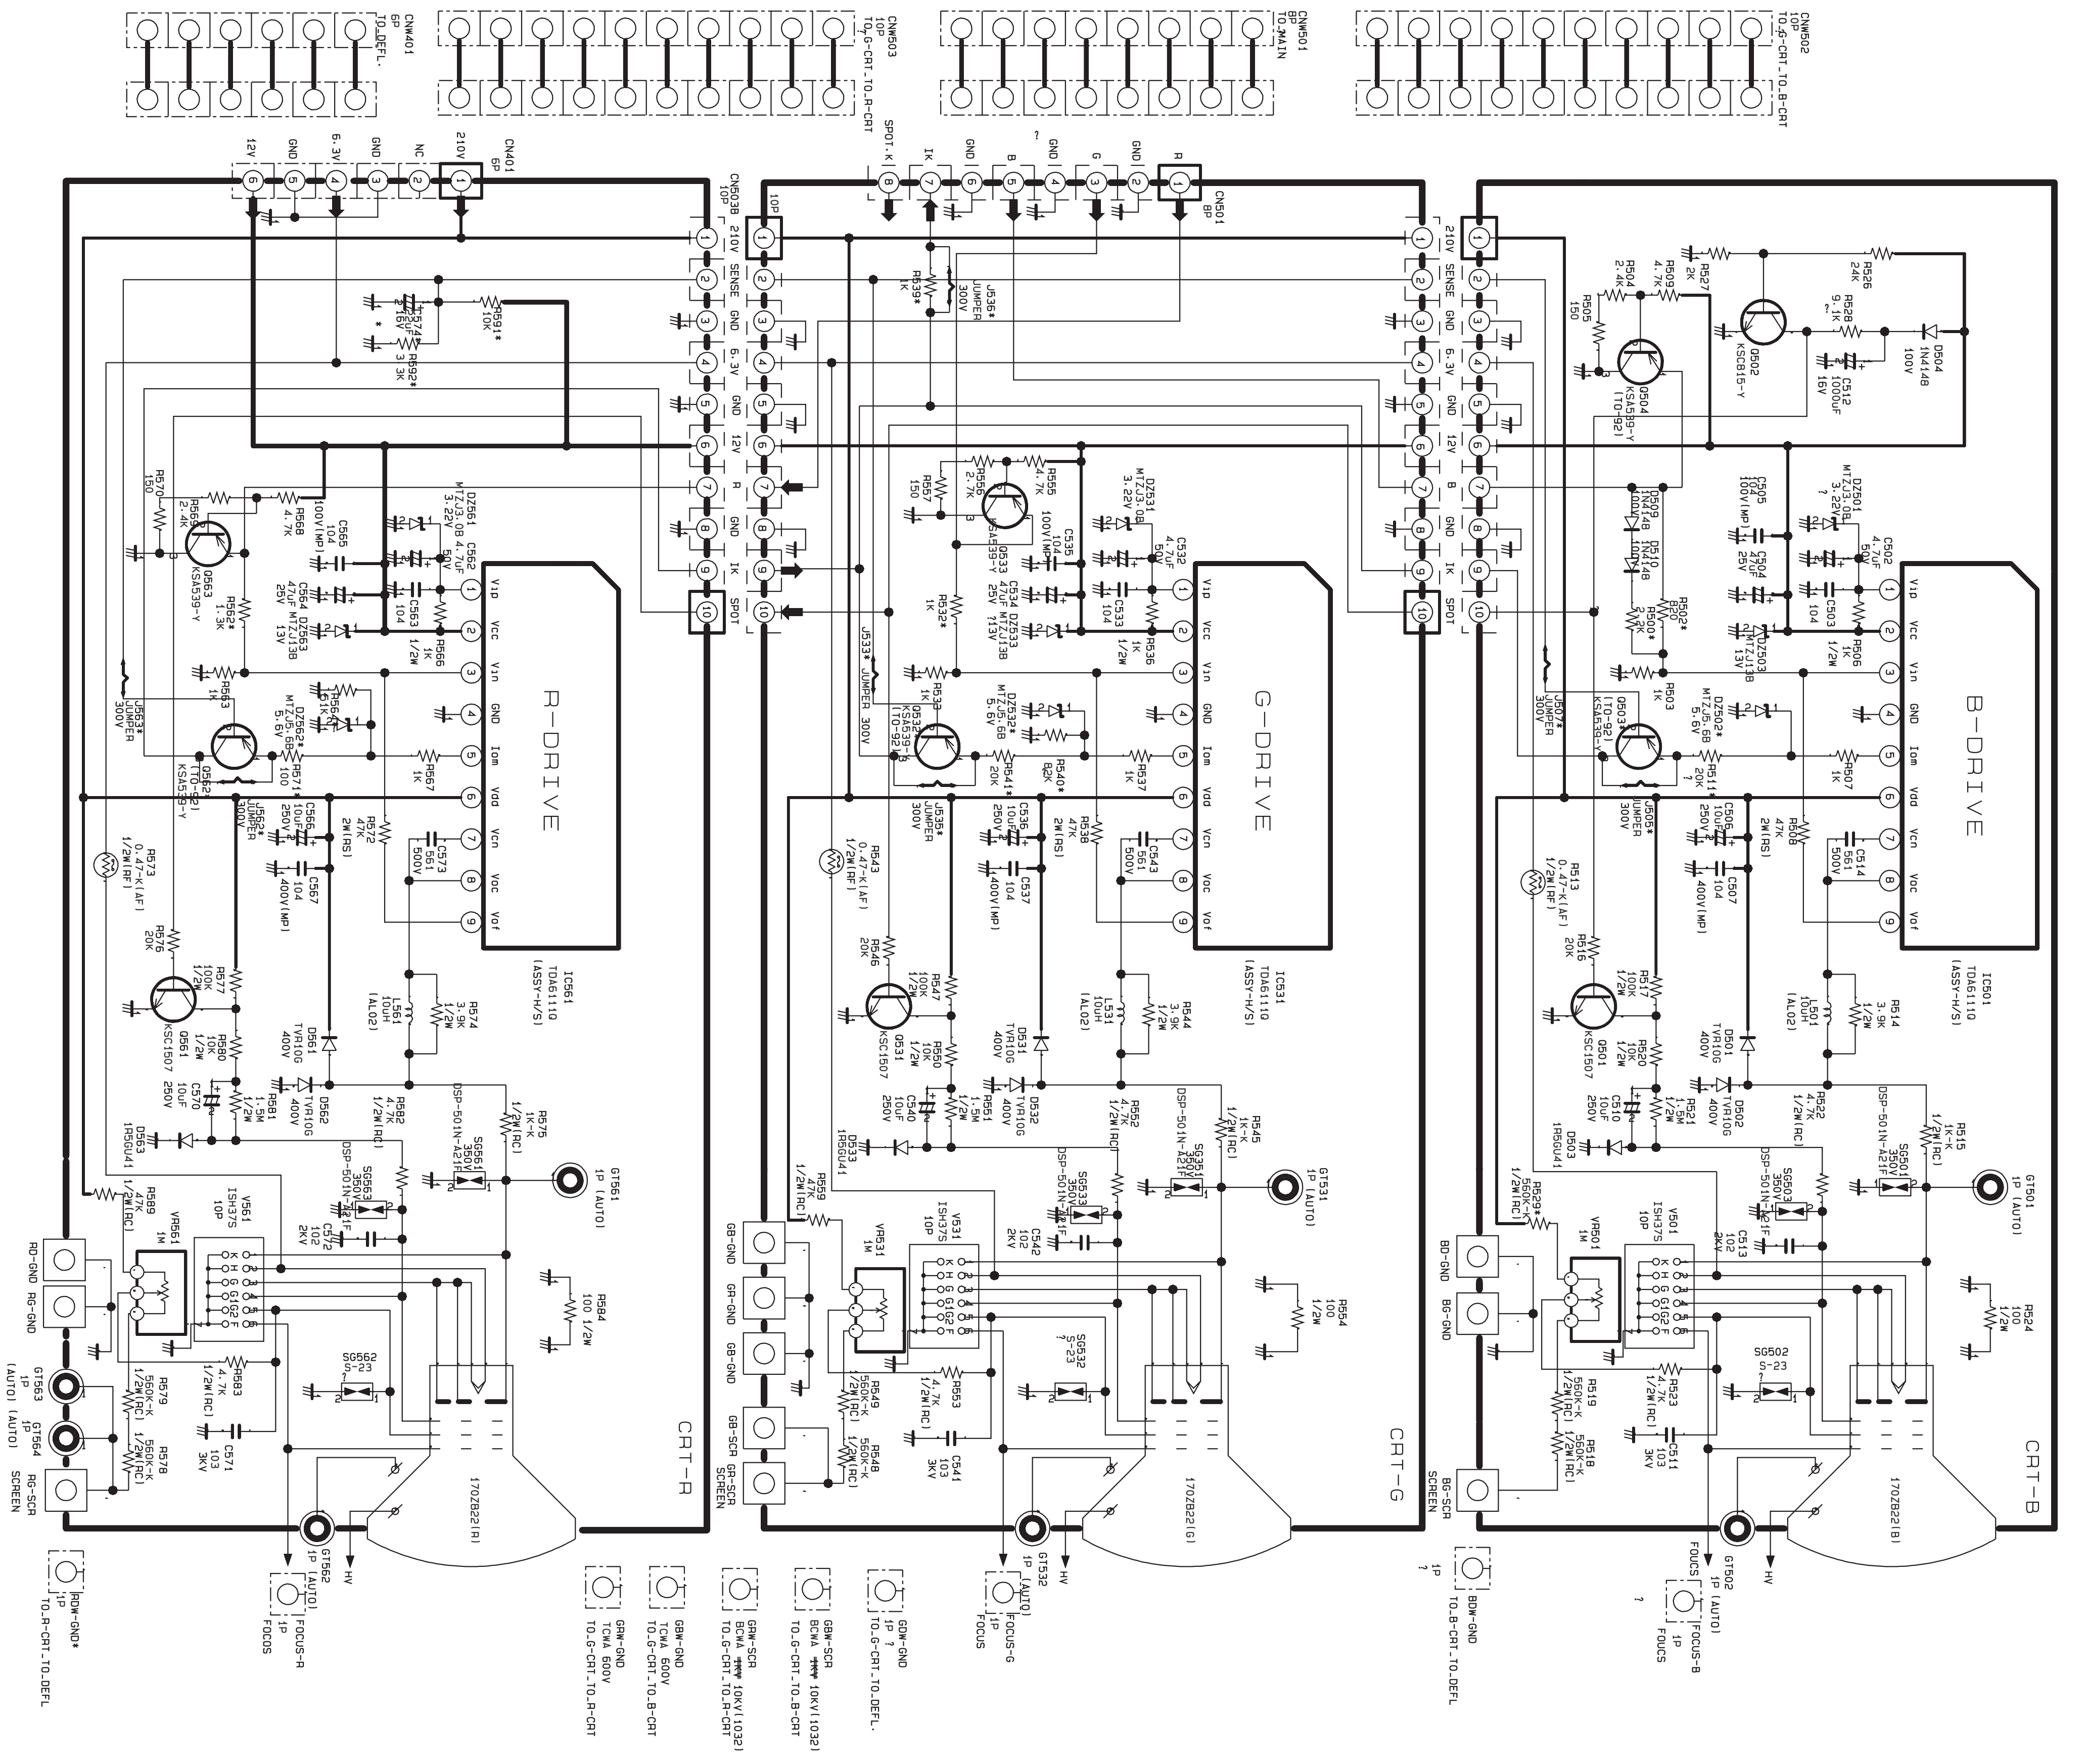


LOC	J51A	J51B
C574	DELETE	22uF.16V
J535	JUMPER	DELETE
J536	JUMPER	DELETE
J562	JUMPER	DELETE
Q503	DELETE	KSA539
Q532	DELETE	KSA539
Q562	DELETE	KSA539
R539	DELETE	1K.1/8W
DZ502	MTZ5.6B	DELETE
R511	20K.1/8W	JUMPER
J505	JUMPER	DELETE
J507	DELETE	JUMPER
R540	82K.1/8W	DELETE
DZ532	MTZ5.6B	DELETE
J533	DELETE	JUMPER
R571	100.1/8W	JUMPER
R564	51K.1/8W	DELETE
DZ562	MTZ5.6B	DELETE
J563	DELETE	JUMPER
R591	DELETE	10K.1/8W
R592	DELETE	3.3K.1/8W
R502	910.1/8W	1K.1/8W
R532	820.1/8W	1K.1/8W
R500	2.2K.1/8W	1.2K.1/8W
R529	560K.1/2W	47K.1/2W

10-9 3D COMB

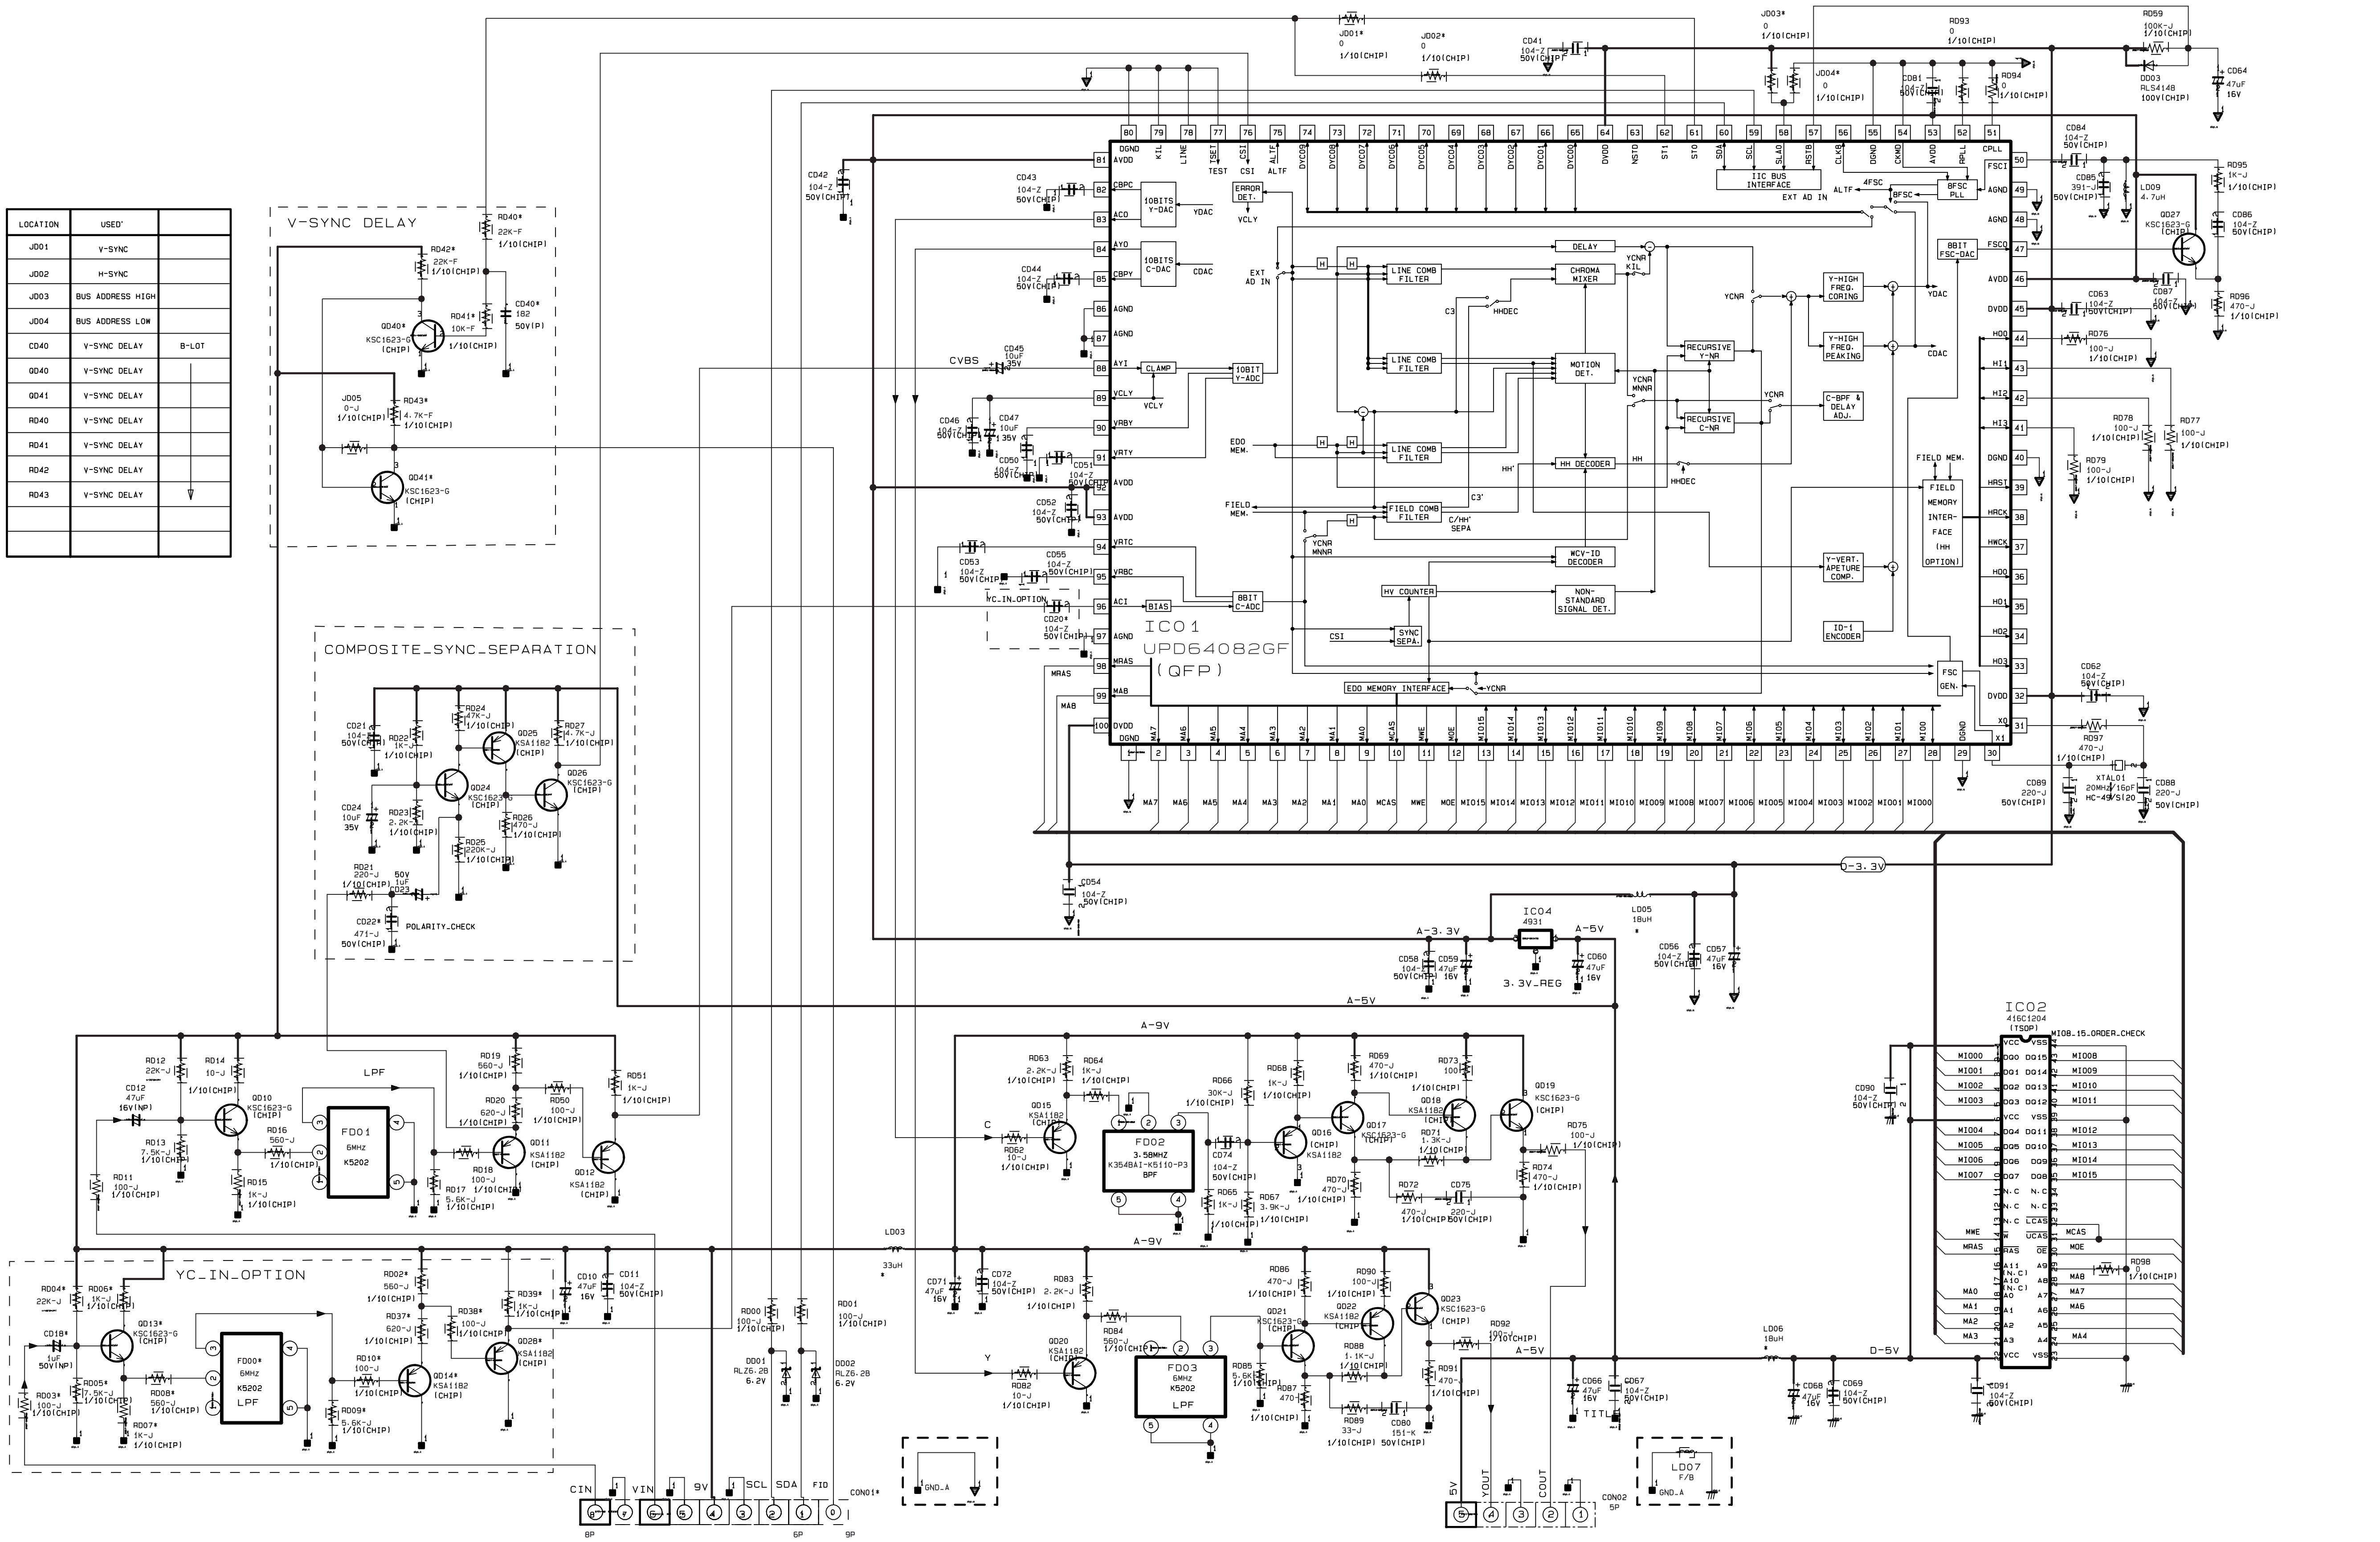


LOCATION	USED'	
JD01	V-SYNC	
JD02	H-SYNC	
JD03	BUS ADDRESS HIGH	
JD04	BUS ADDRESS LOW	
CD40	V-SYNC DELAY	B-LOT
QD40	V-SYNC DELAY	↓
QD41	V-SYNC DELAY	↓
RD40	V-SYNC DELAY	↓
RD41	V-SYNC DELAY	↓
RD42	V-SYNC DELAY	↓
RD43	V-SYNC DELAY	↓

10-10 SUB 1

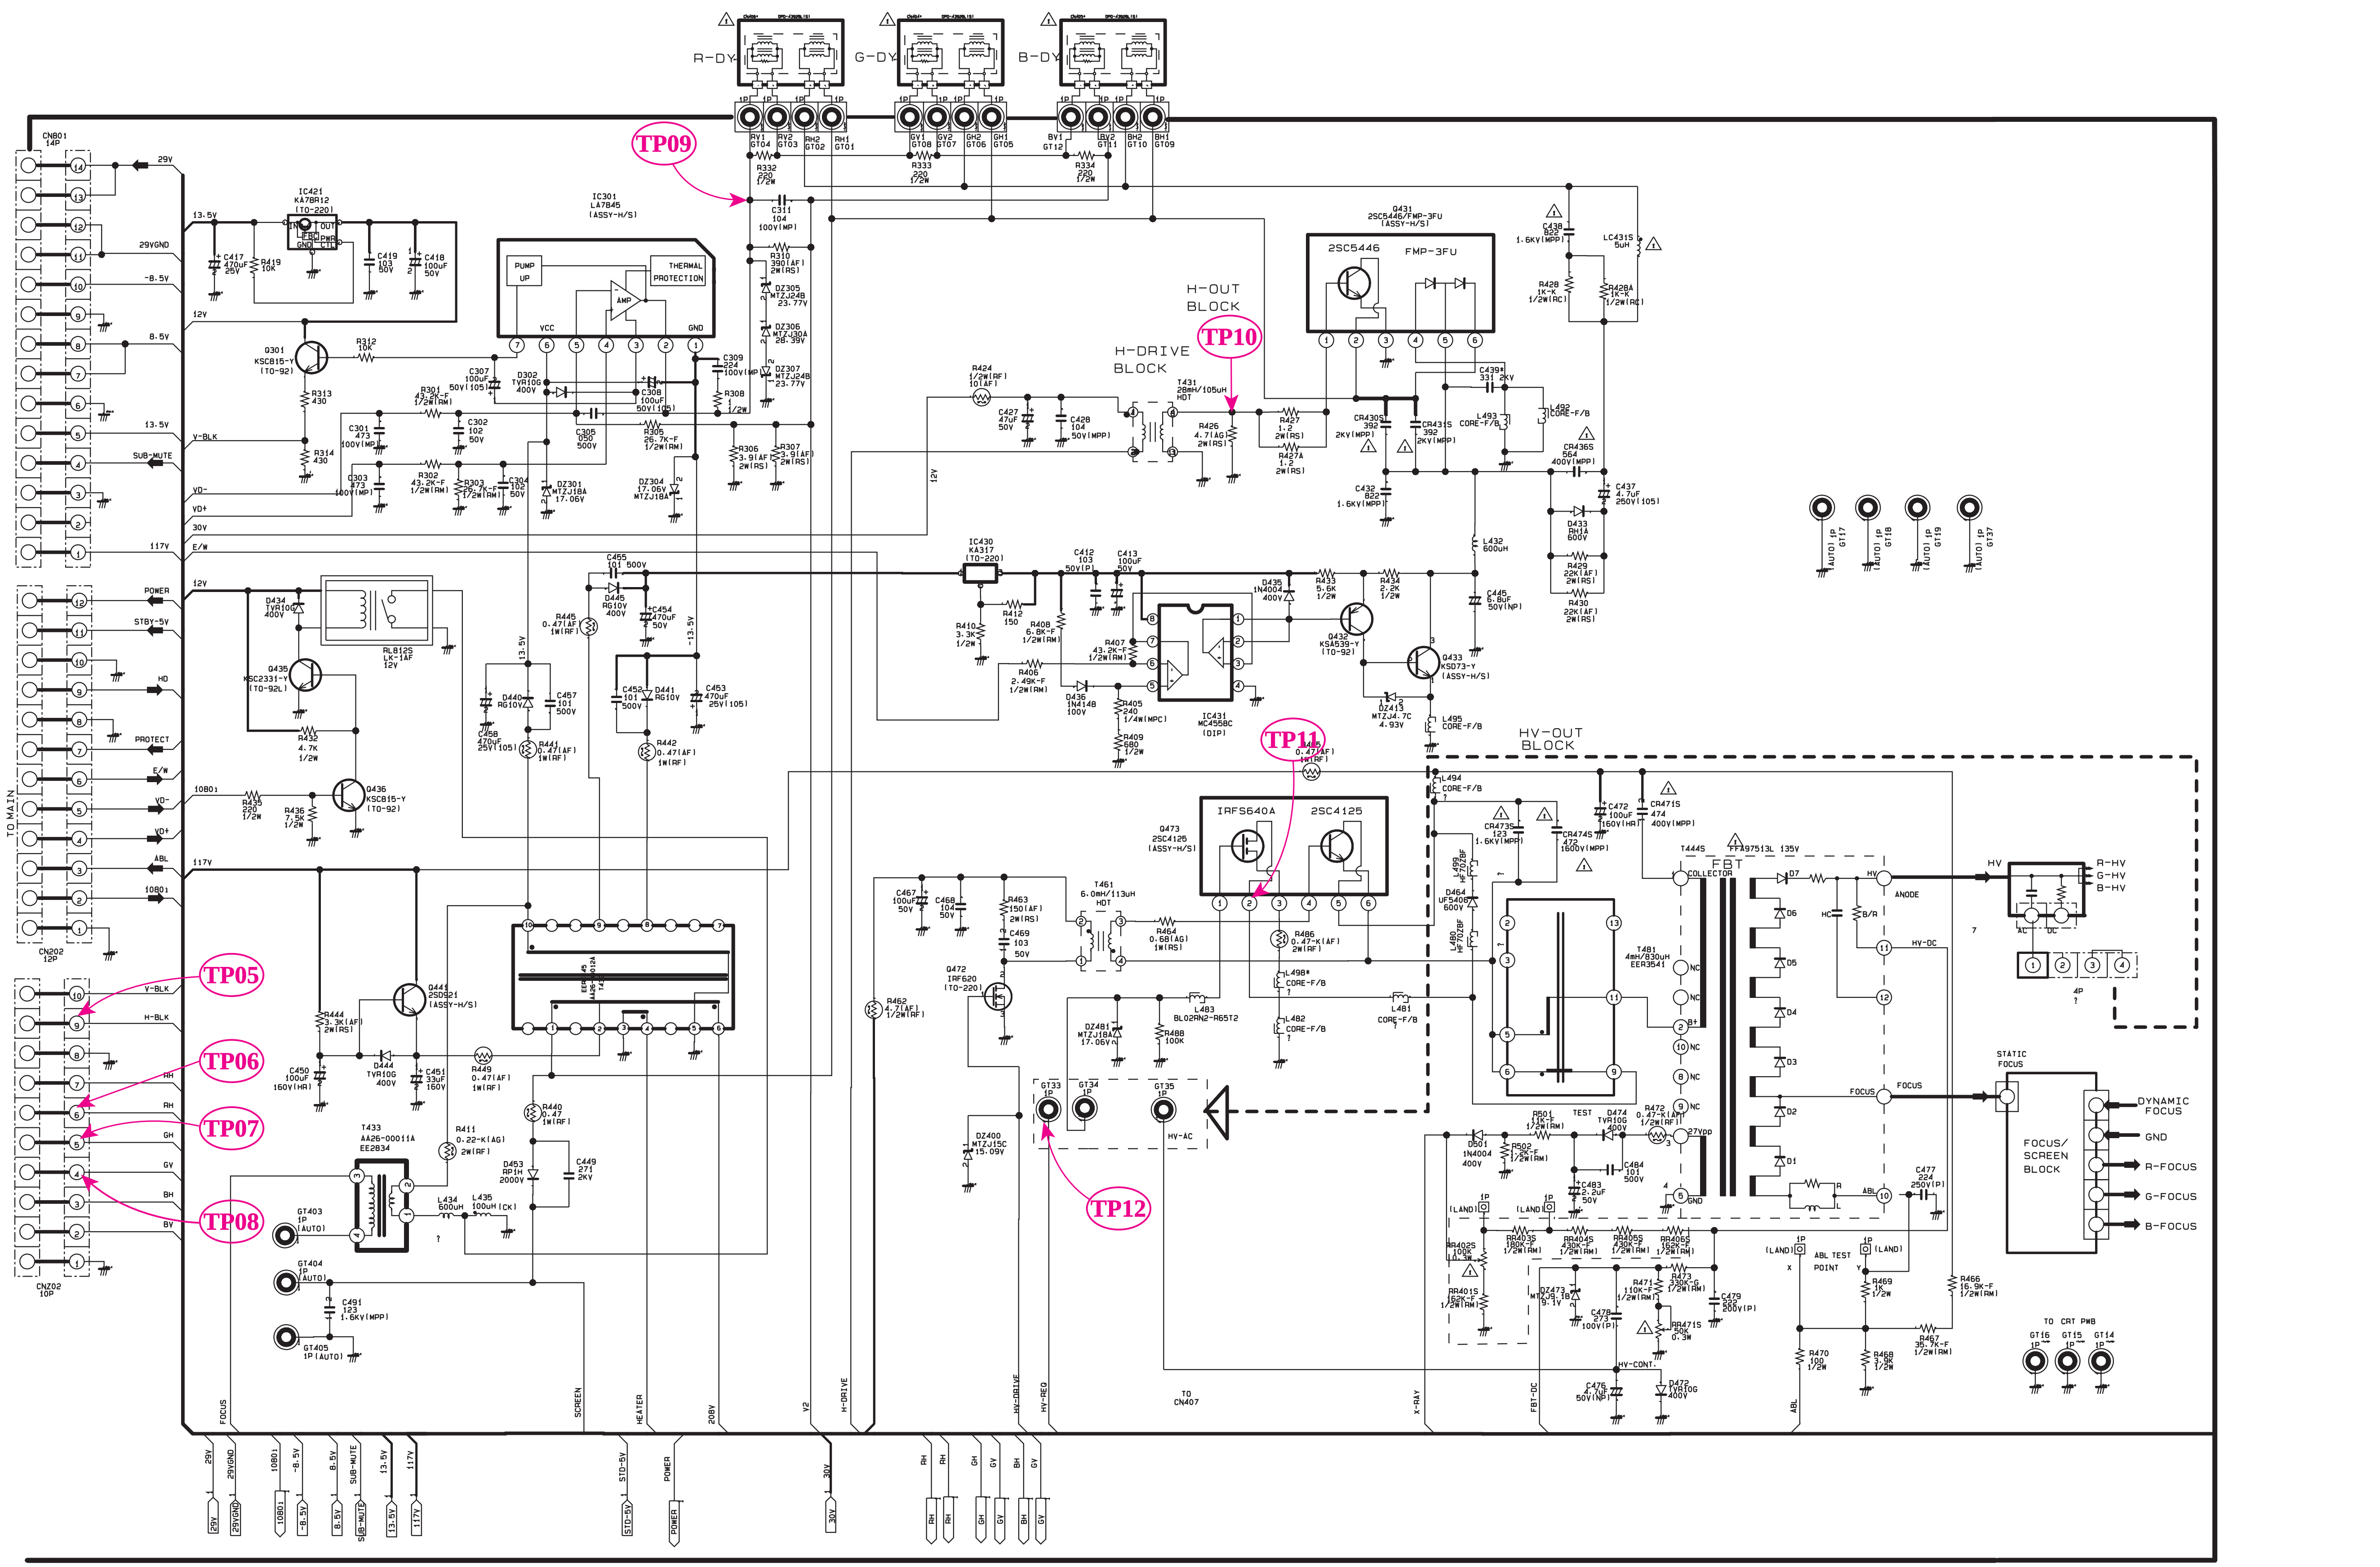

TP09
TP10
TP11
TP12
TP05
TP06
TP07
TP08
H-OUT BLOCK
H-DRIVE BLOCK
HV-OUT BLOCK
R-DY
G-DY
B-DY
TO MAIN
FOCUS/SCREEN BLOCK
DYNAMIC FOCUS
GND
R-FOCUS
G-FOCUS
B-FOCUS
TO CRT PWB

10-10-1 SUB 1 WAVEFORMS


TP06




TP07




TP08




TP09




TP10




TP11




TP12




10-11 SUB 2

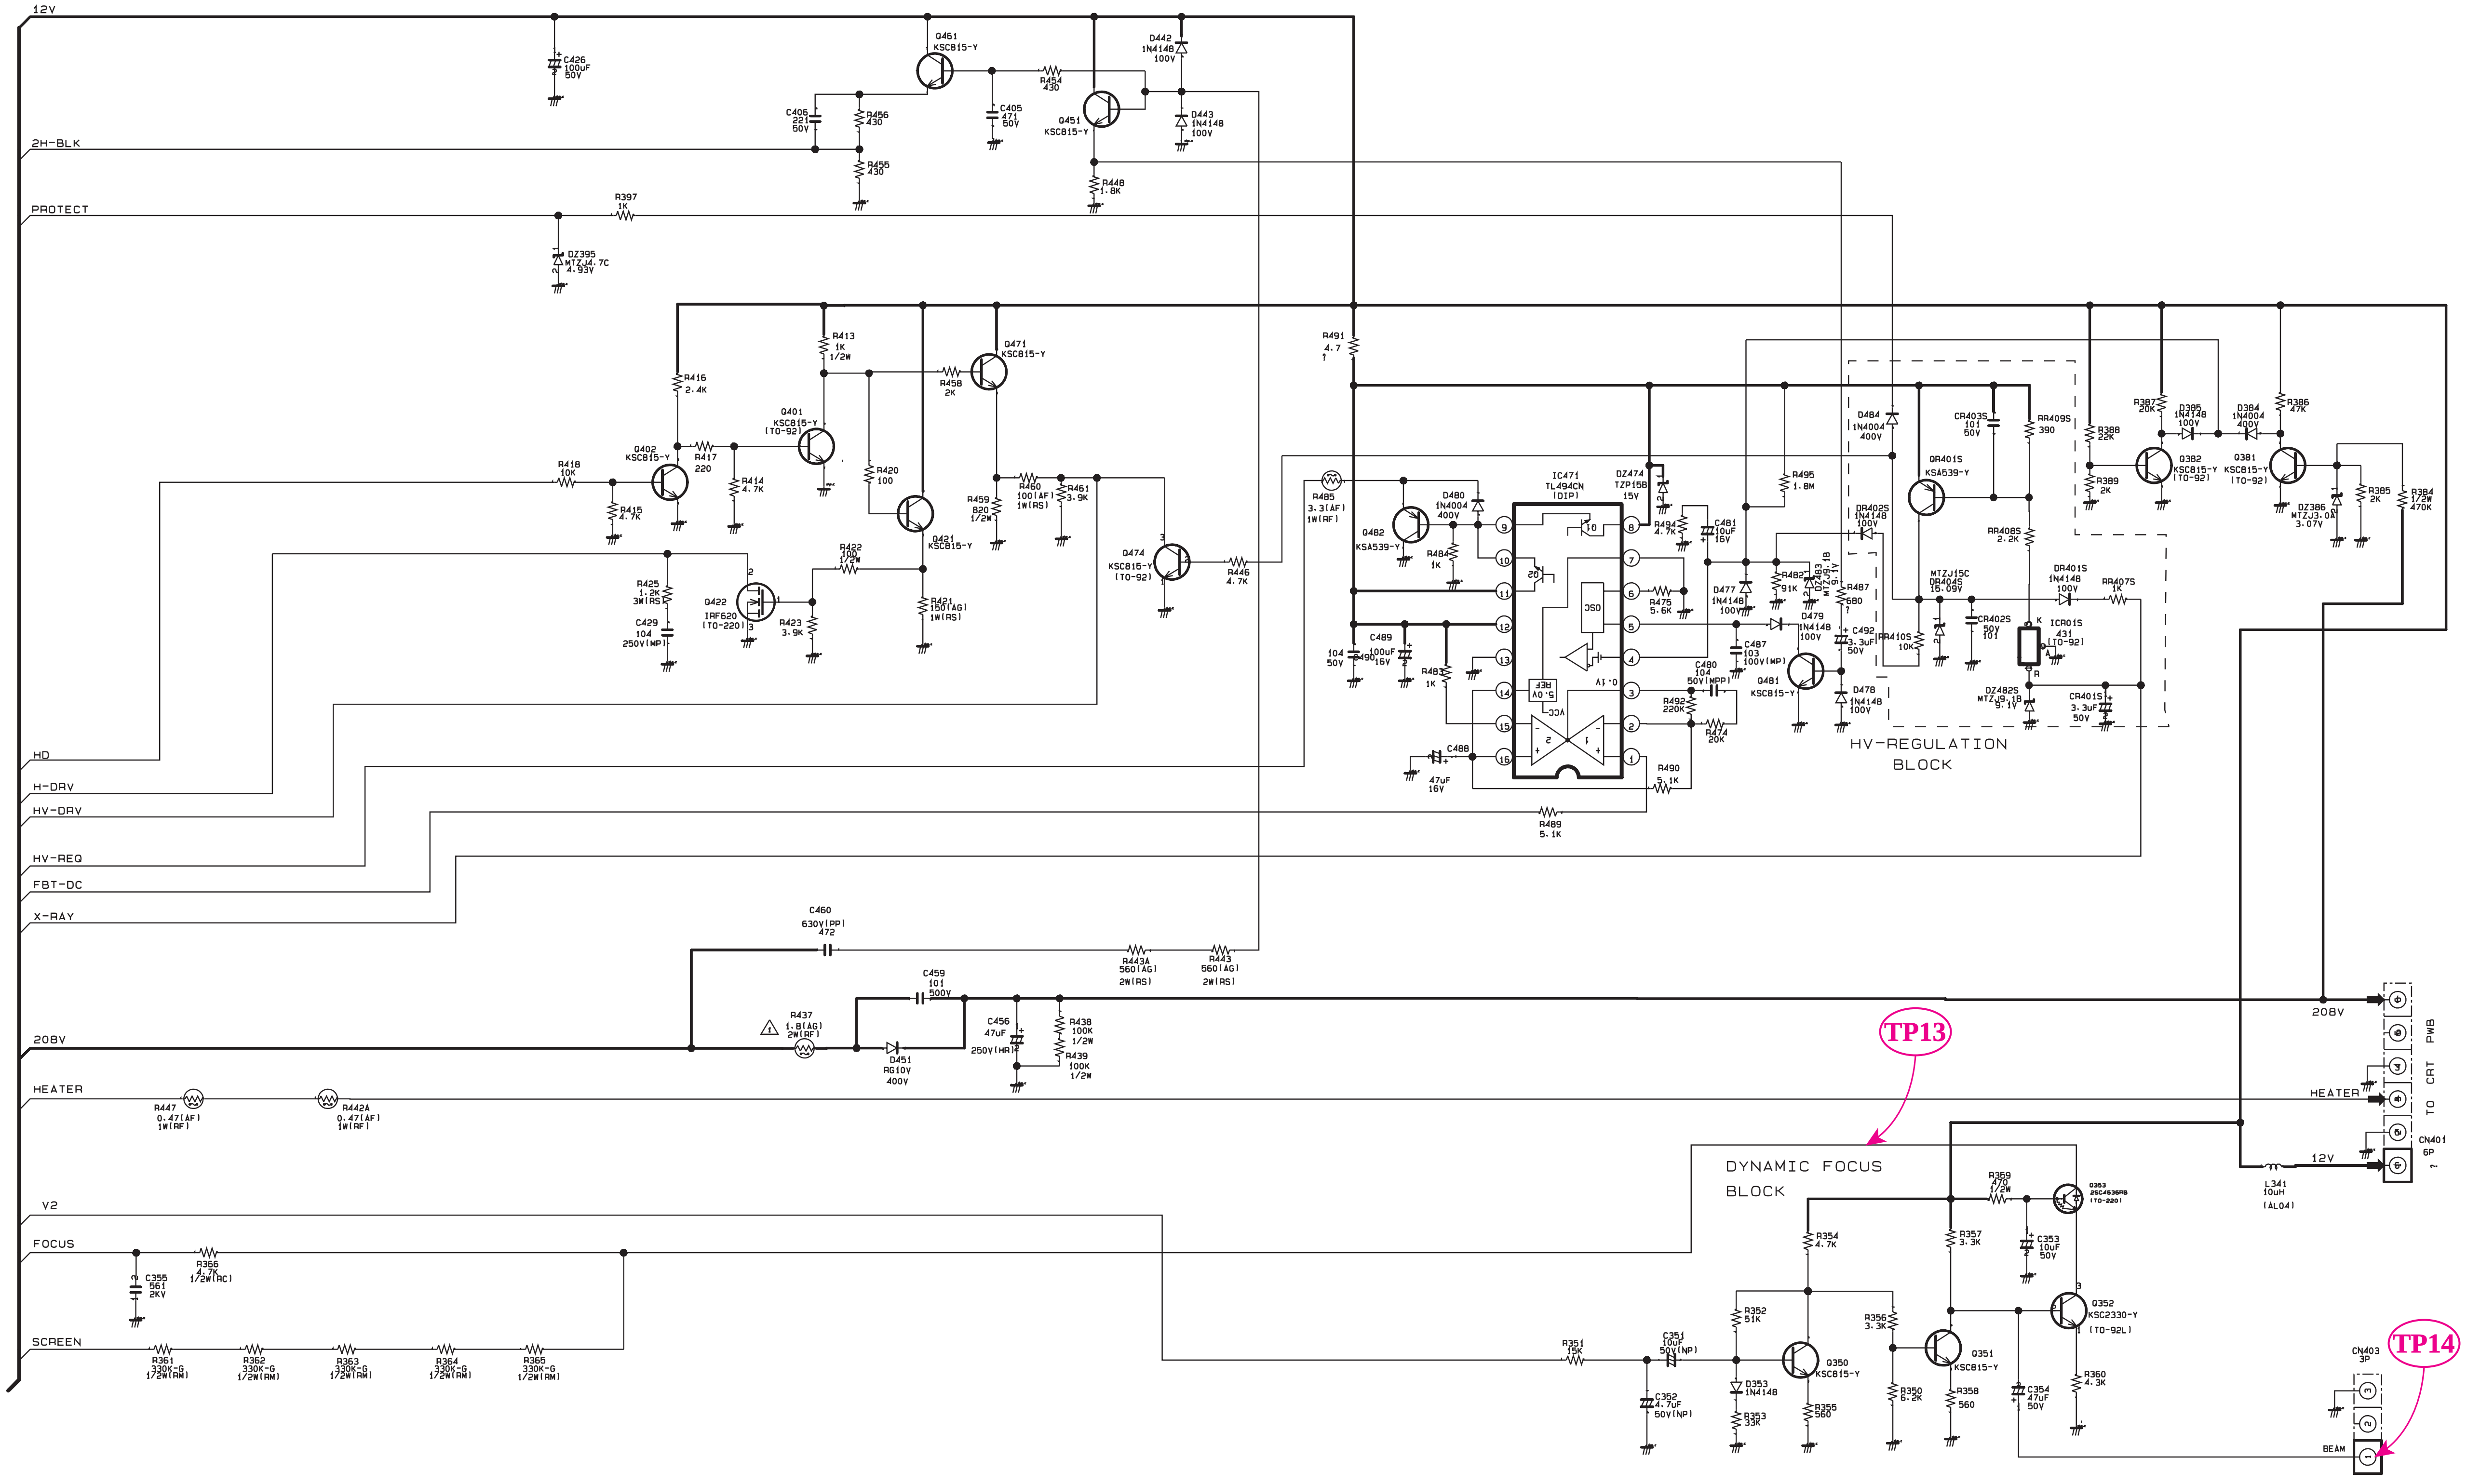
12V
2H-BLK
PROTECT
HD
H-DRV
HV-DRV
HV-REQ
FBT-DC
X-RAY
208V
HEATER
V2
FOCUS
SCREEN
HV-REGULATION BLOCK
DYNAMIC FOCUS BLOCK
TP13
TP14
IC471 TL494CN (DIP)
TO CRT PWB
CN401 6P
CN403 3P
BEAM

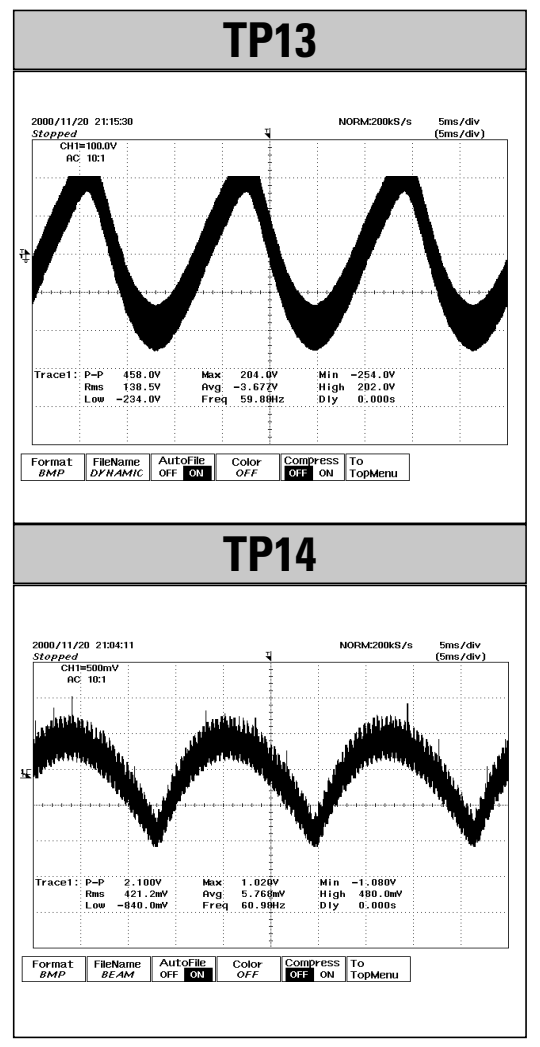
TP13
TP14


10-12 SUB 3

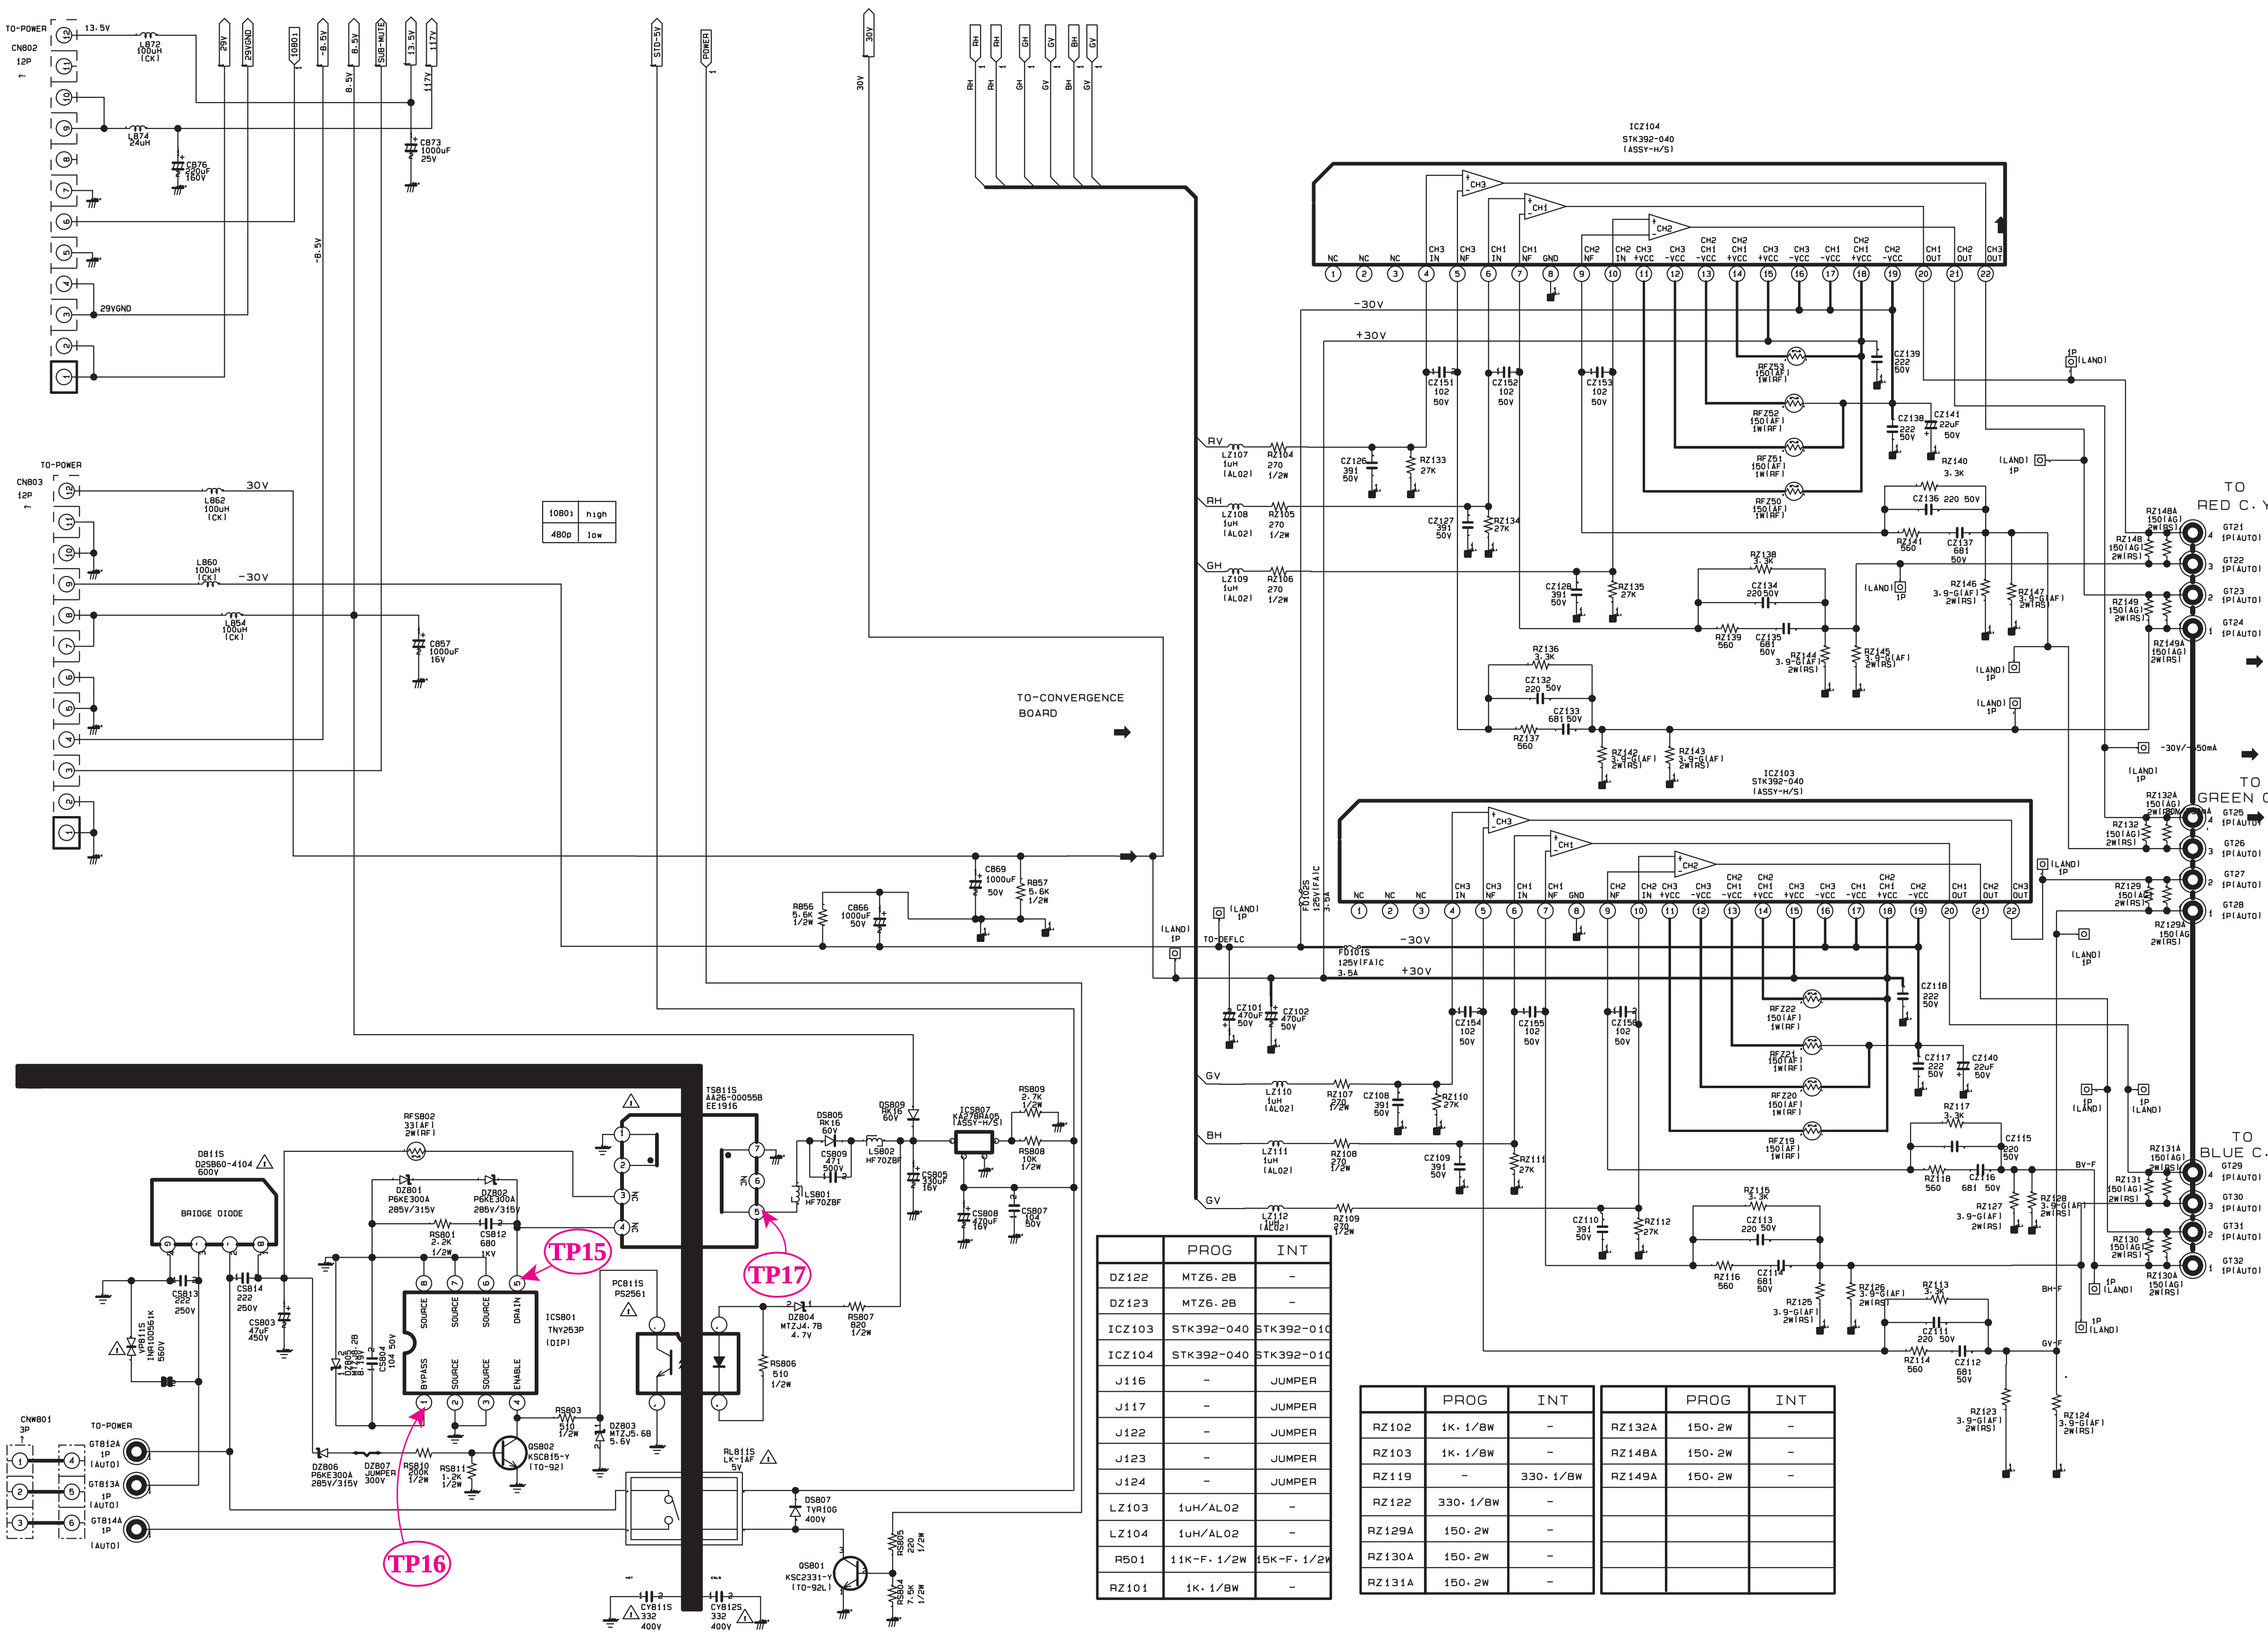


	PROG	INT
DZ122	MTZ6, 2B	-
DZ123	MTZ6, 2B	-
ICZ103	STK392-040	STK392-010
ICZ104	STK392-040	STK392-010
J116	-	JUMPER
J117	-	JUMPER
J122	-	JUMPER
J123	-	JUMPER
J124	-	JUMPER
LZ103	1uH/AL02	-
LZ104	1uH/AL02	-
R501	11K-F, 1/2W	15K-F, 1/2W
RZ101	1K, 1/8W	-

	PROG	INT
RZ102	1K, 1/8W	-
RZ103	1K, 1/8W	-
RZ119	-	330, 1/8W
RZ122	330, 1/8W	-
RZ129A	150, 2W	-
RZ130A	150, 2W	-
RZ131A	150, 2W	-


	PROG	INT
RZ132A	150, 2W	-
RZ148A	150, 2W	-
RZ149A	150, 2W	-

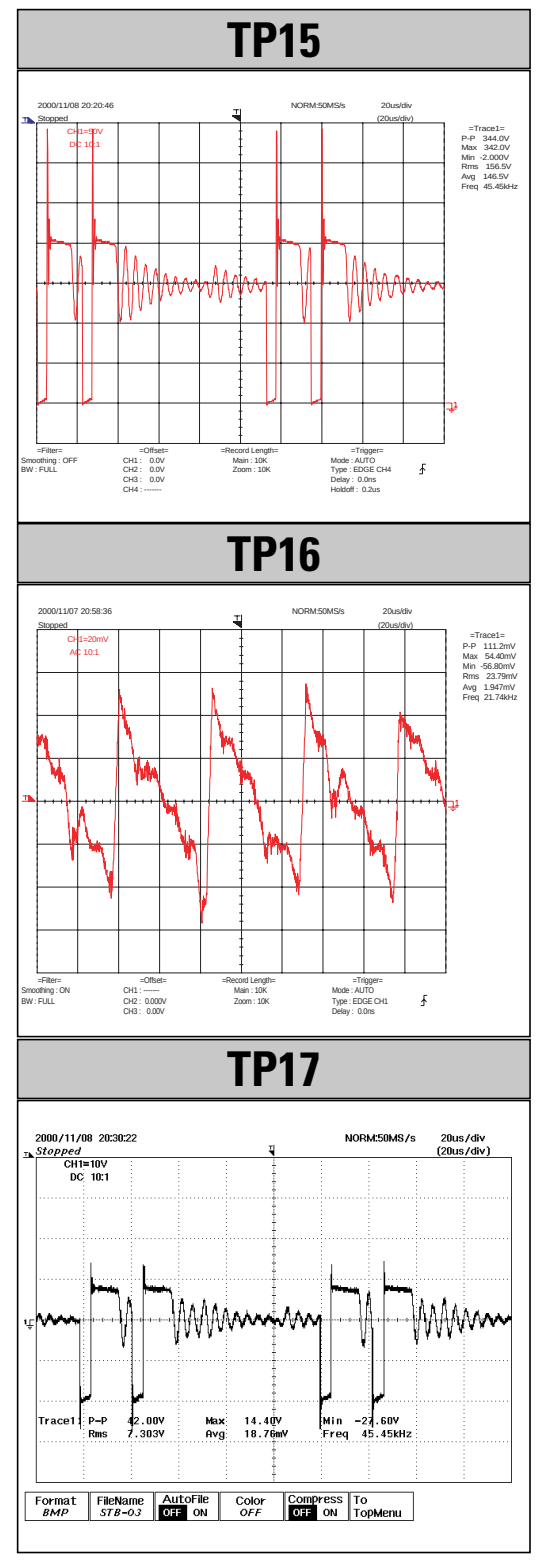


10-13 A/V TERMINAL

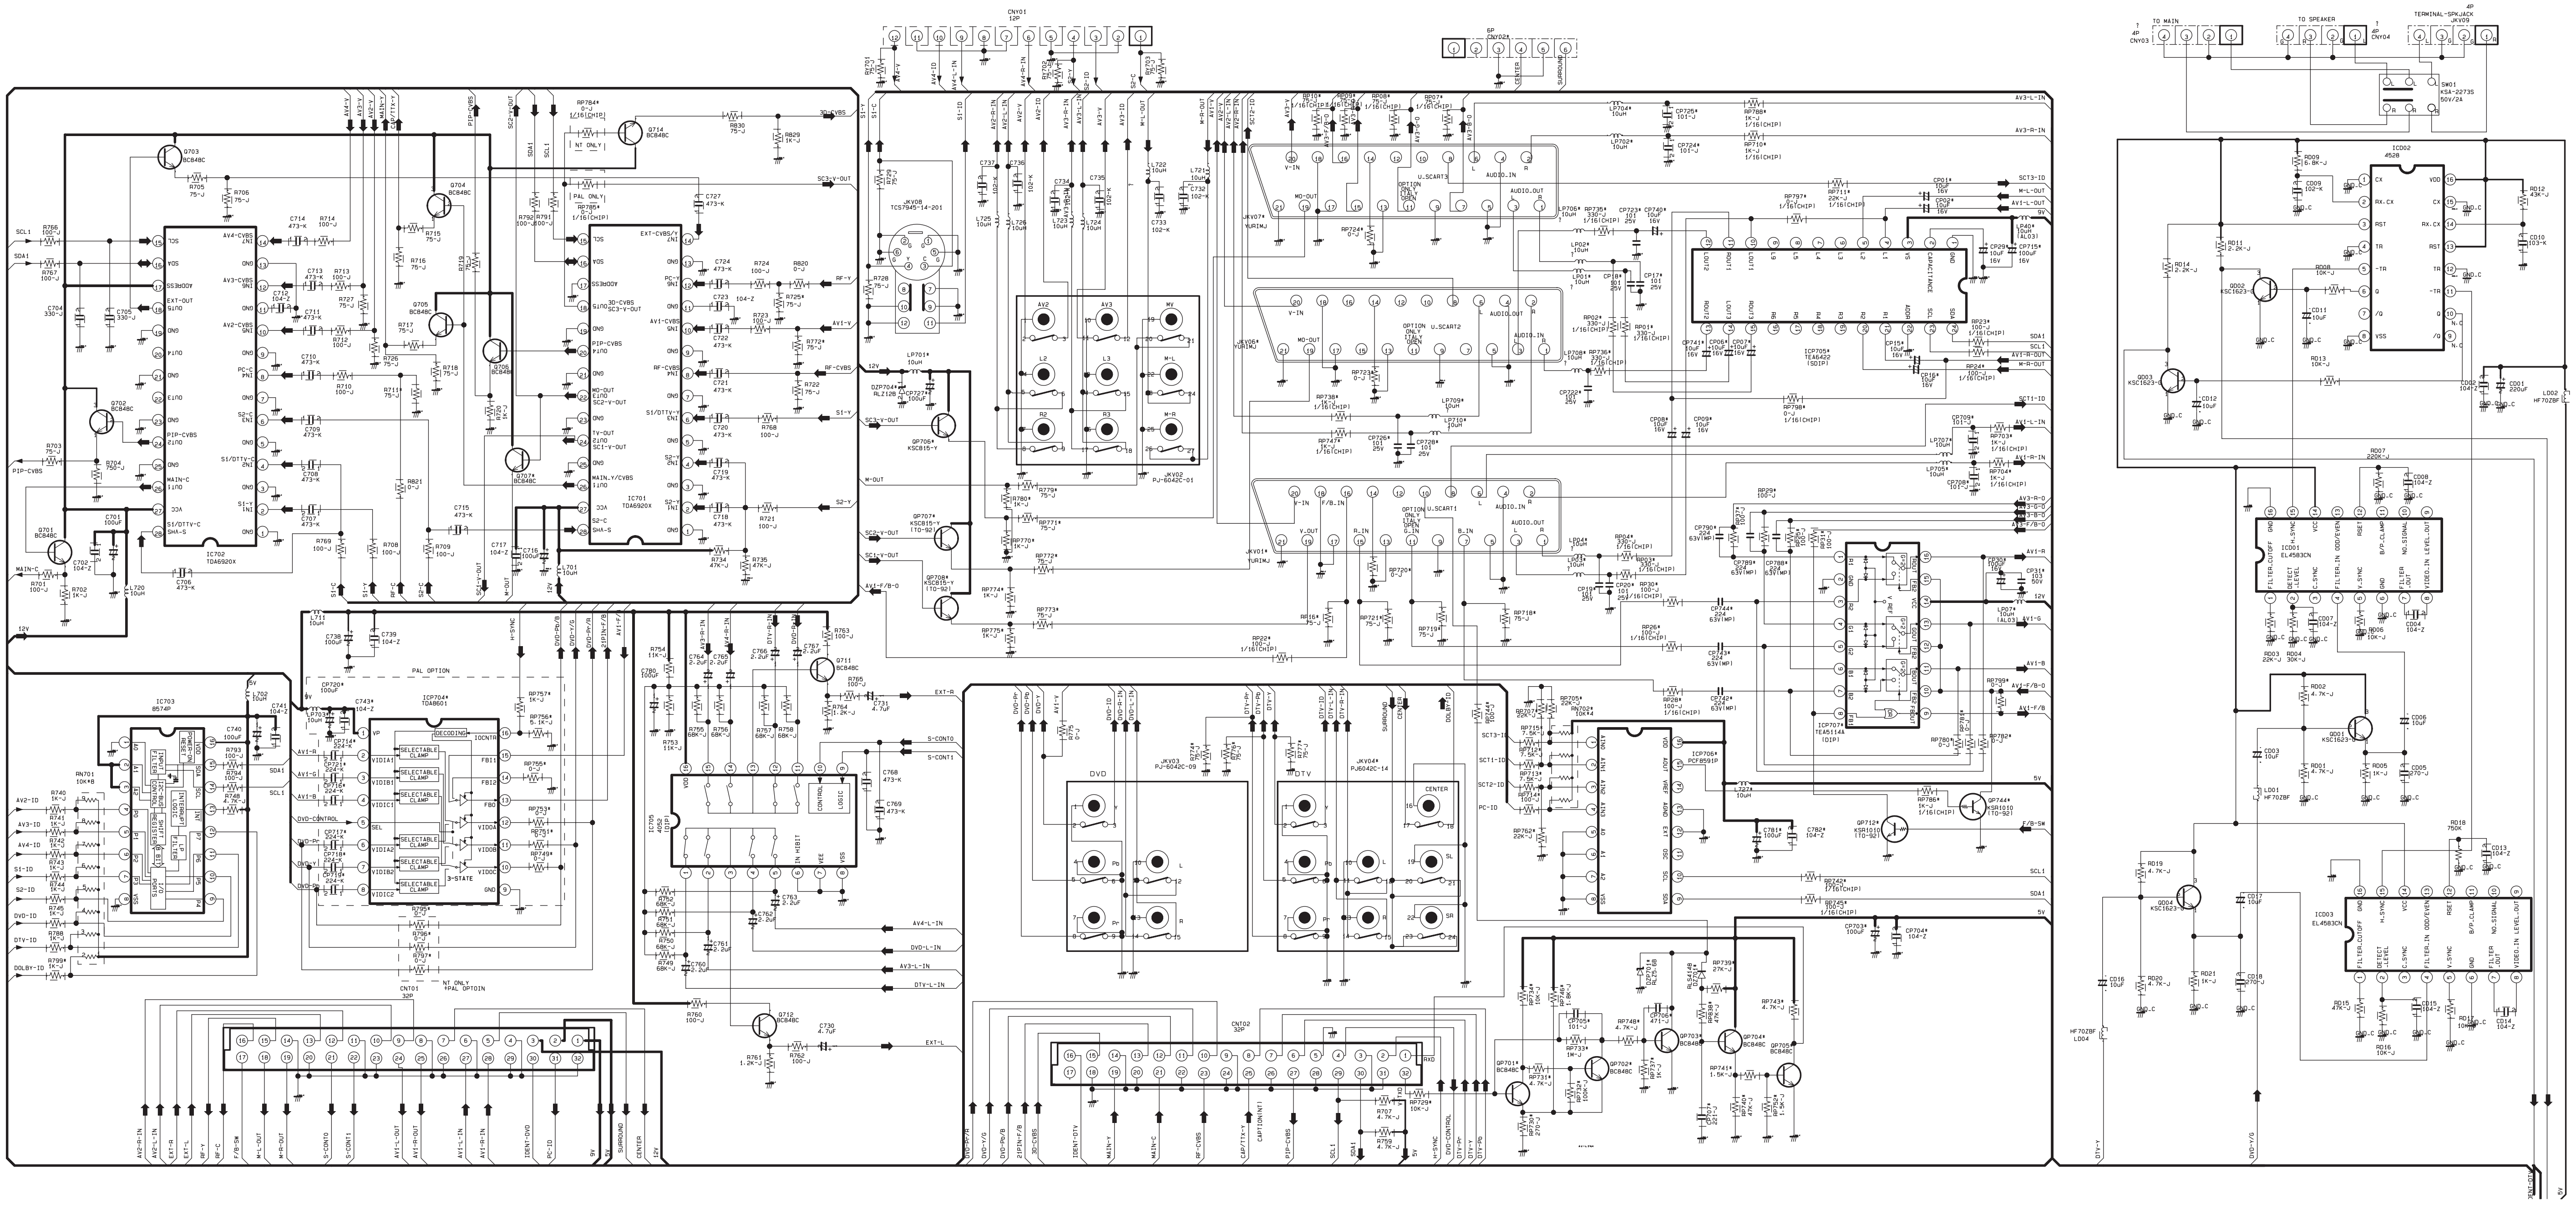


10-14 AV CONTROL

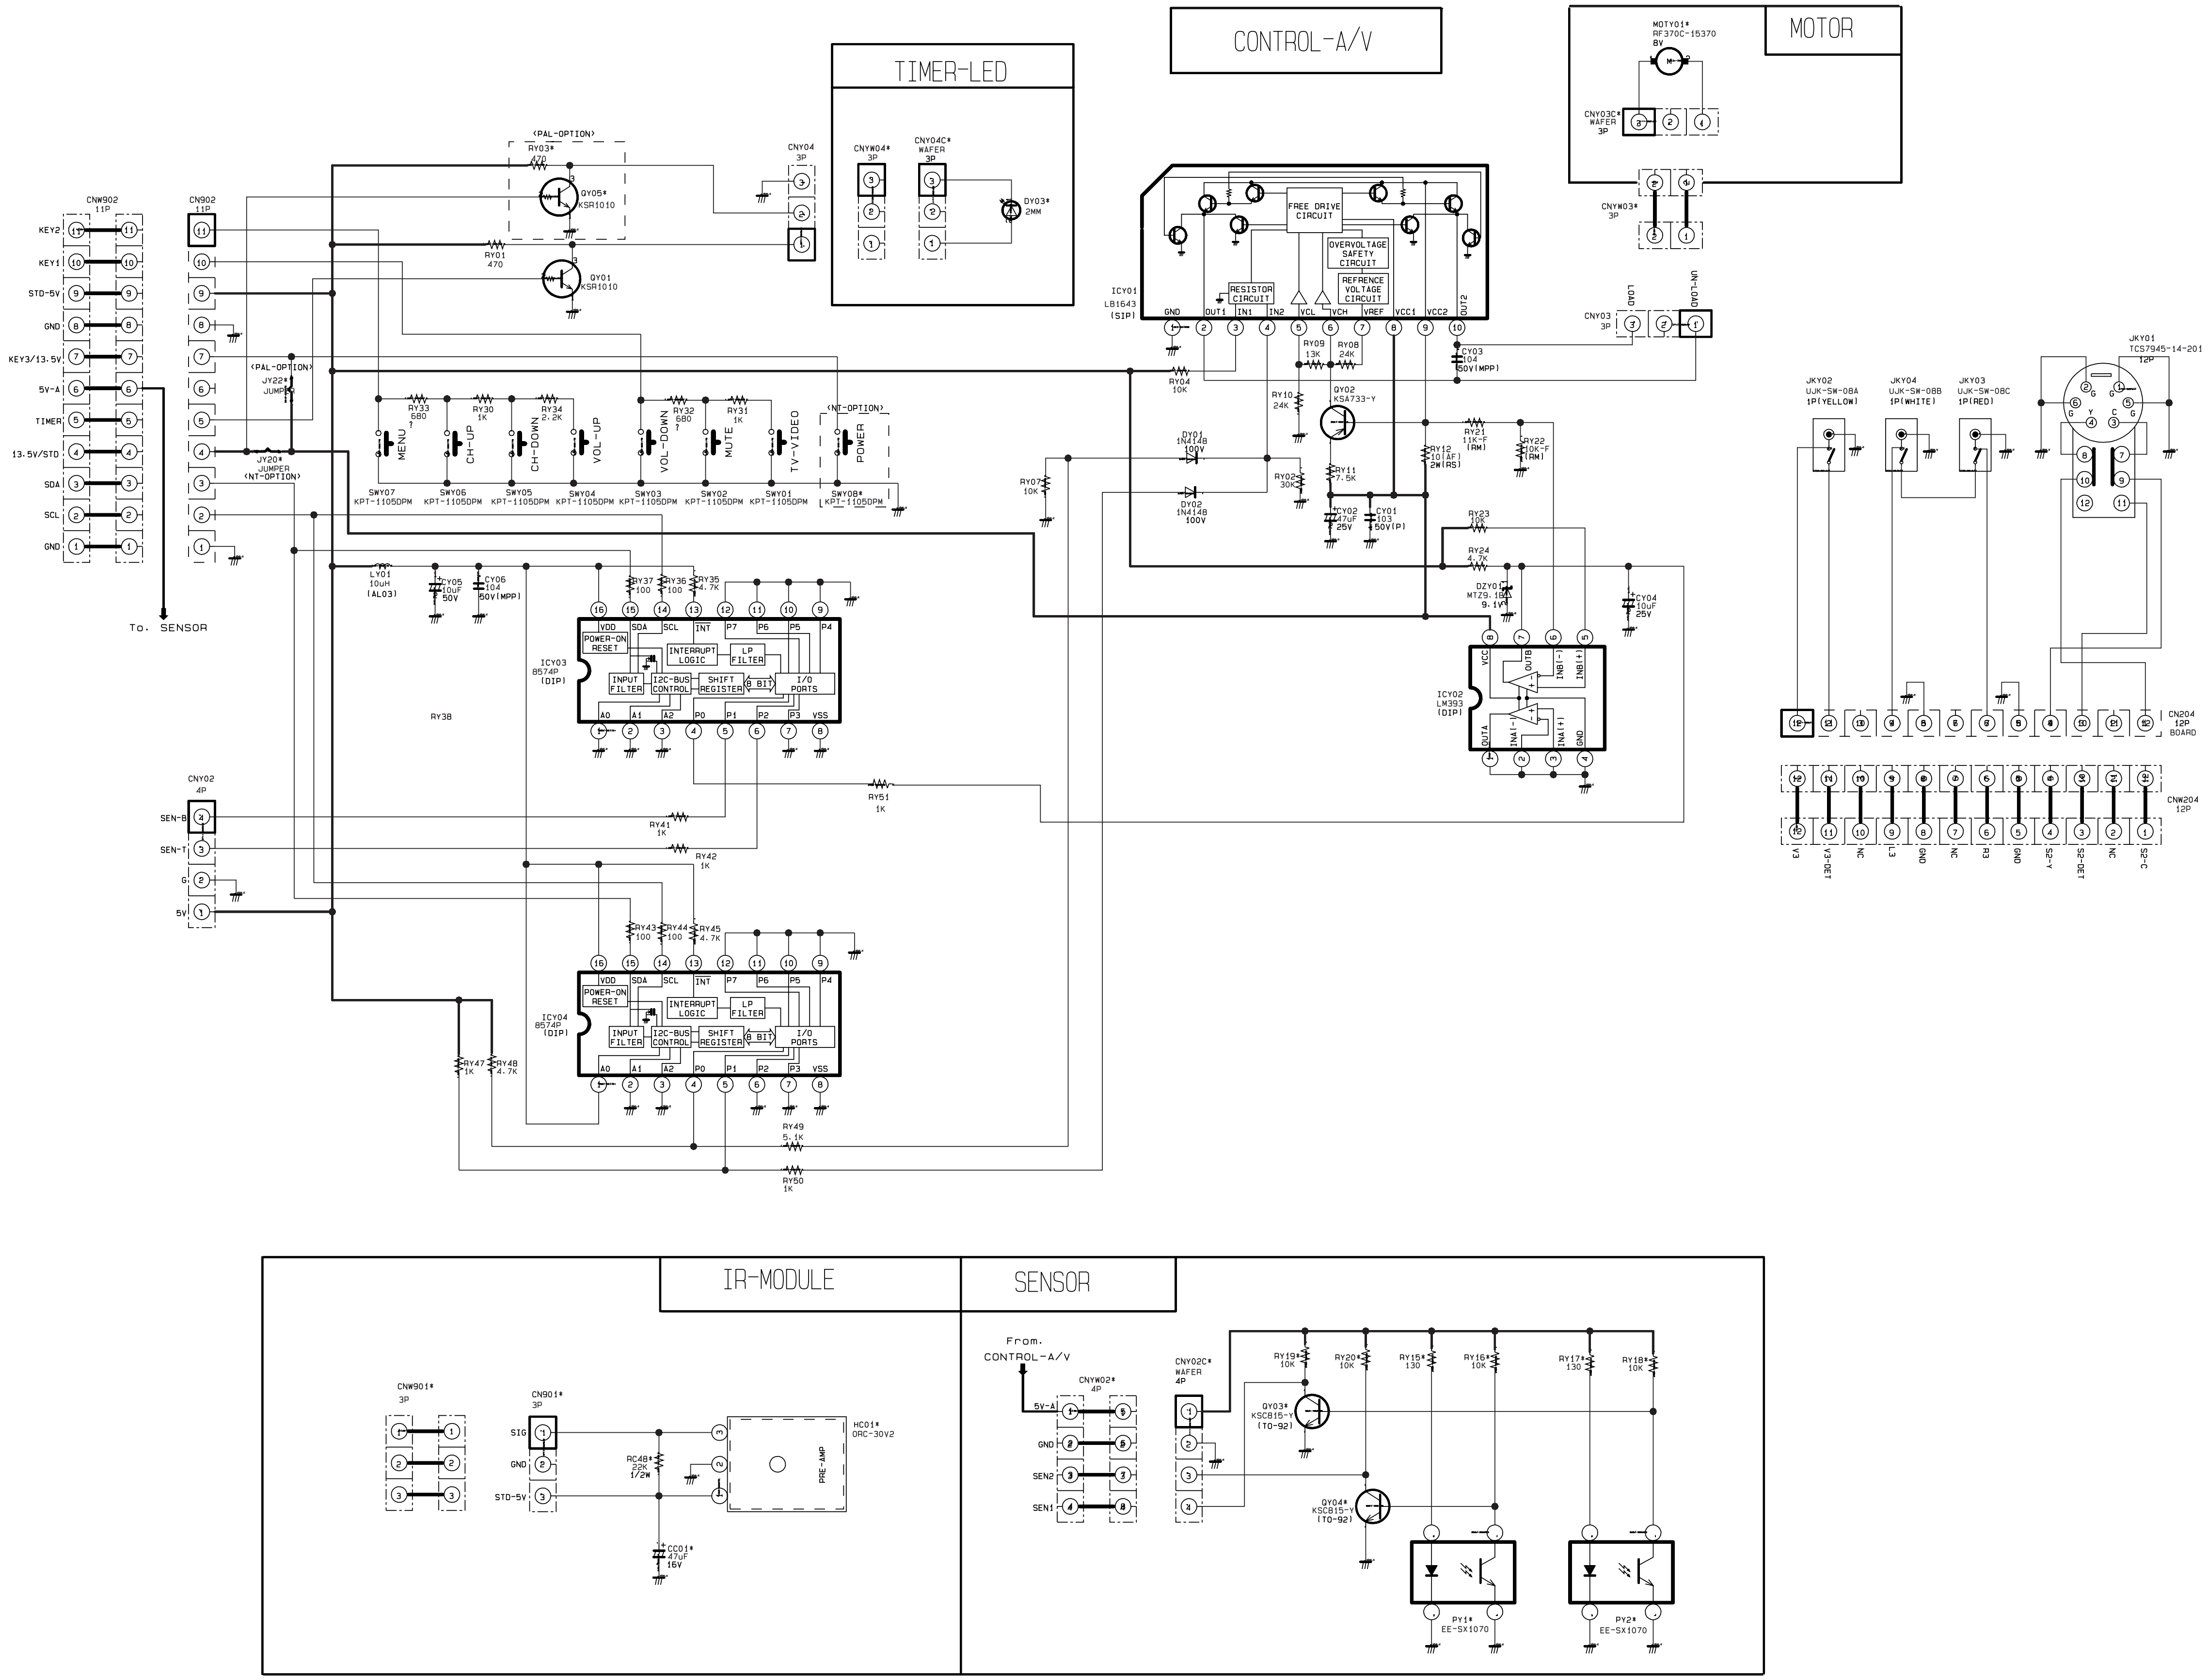


10-15 CONVERGENCE (SDC11 - 1)

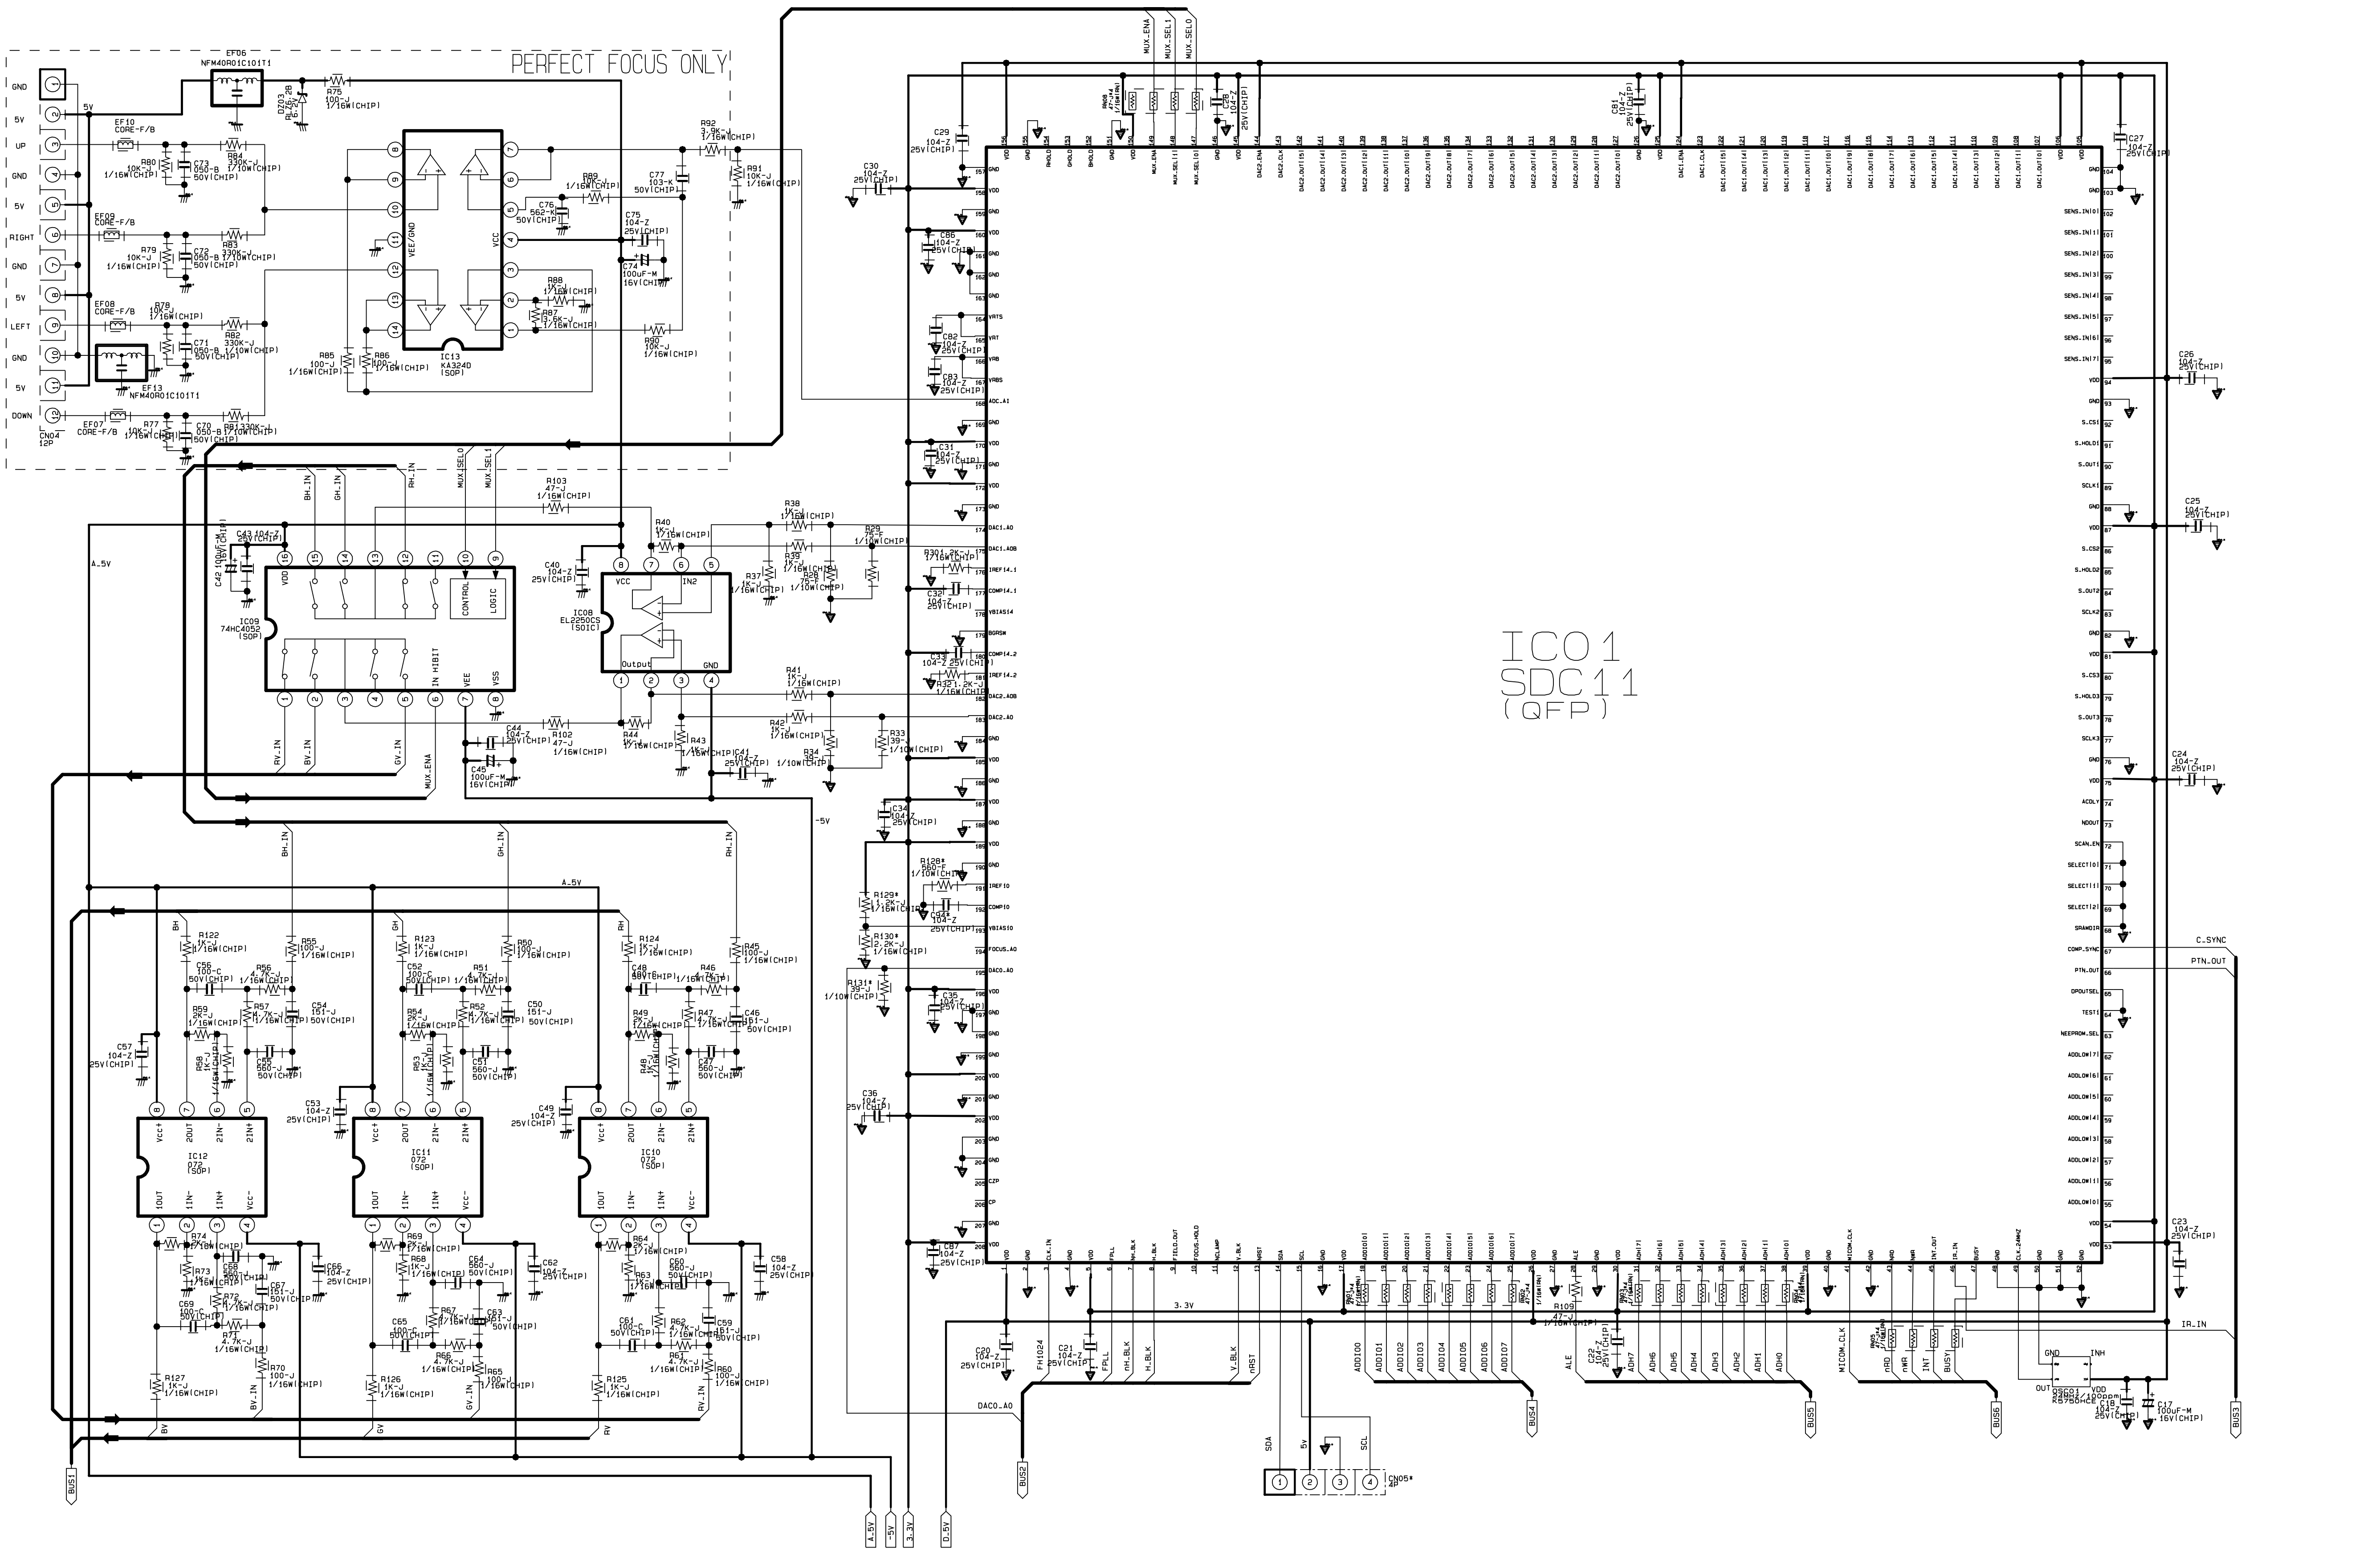

10-16 CONVERGENCE (SDC11 - 2)

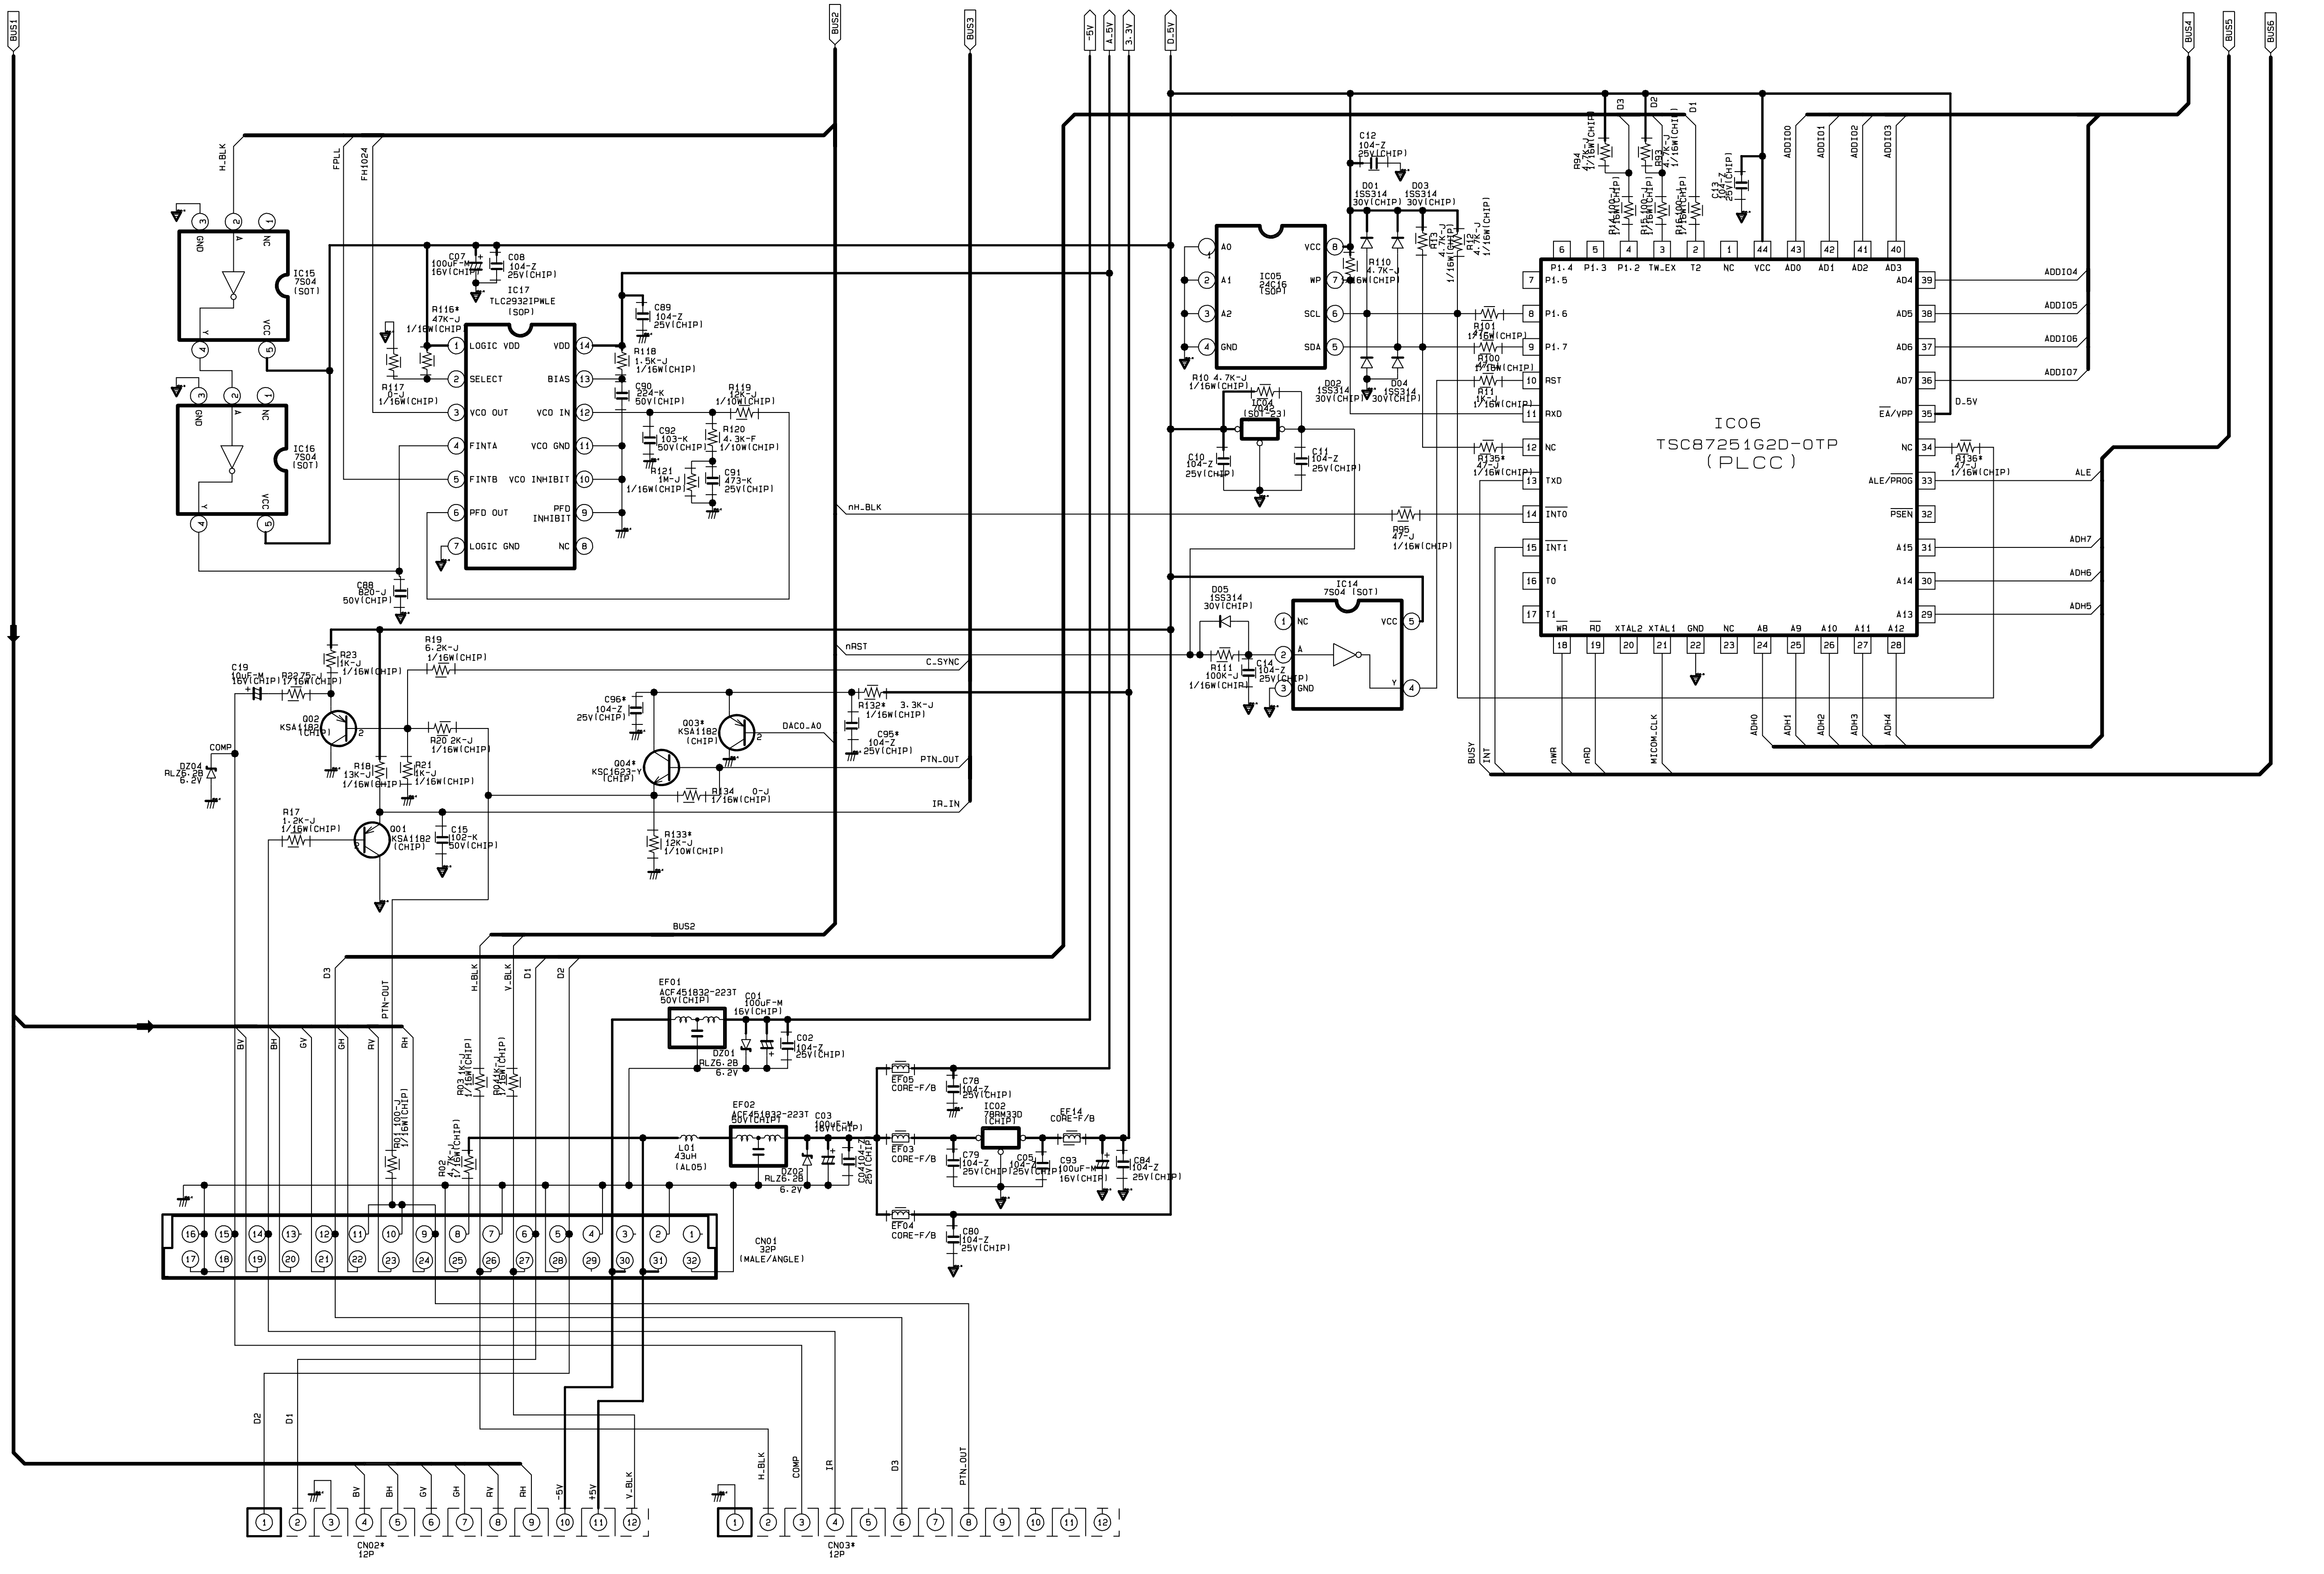


10-17 CONVERGENCE (SDC112- 2)

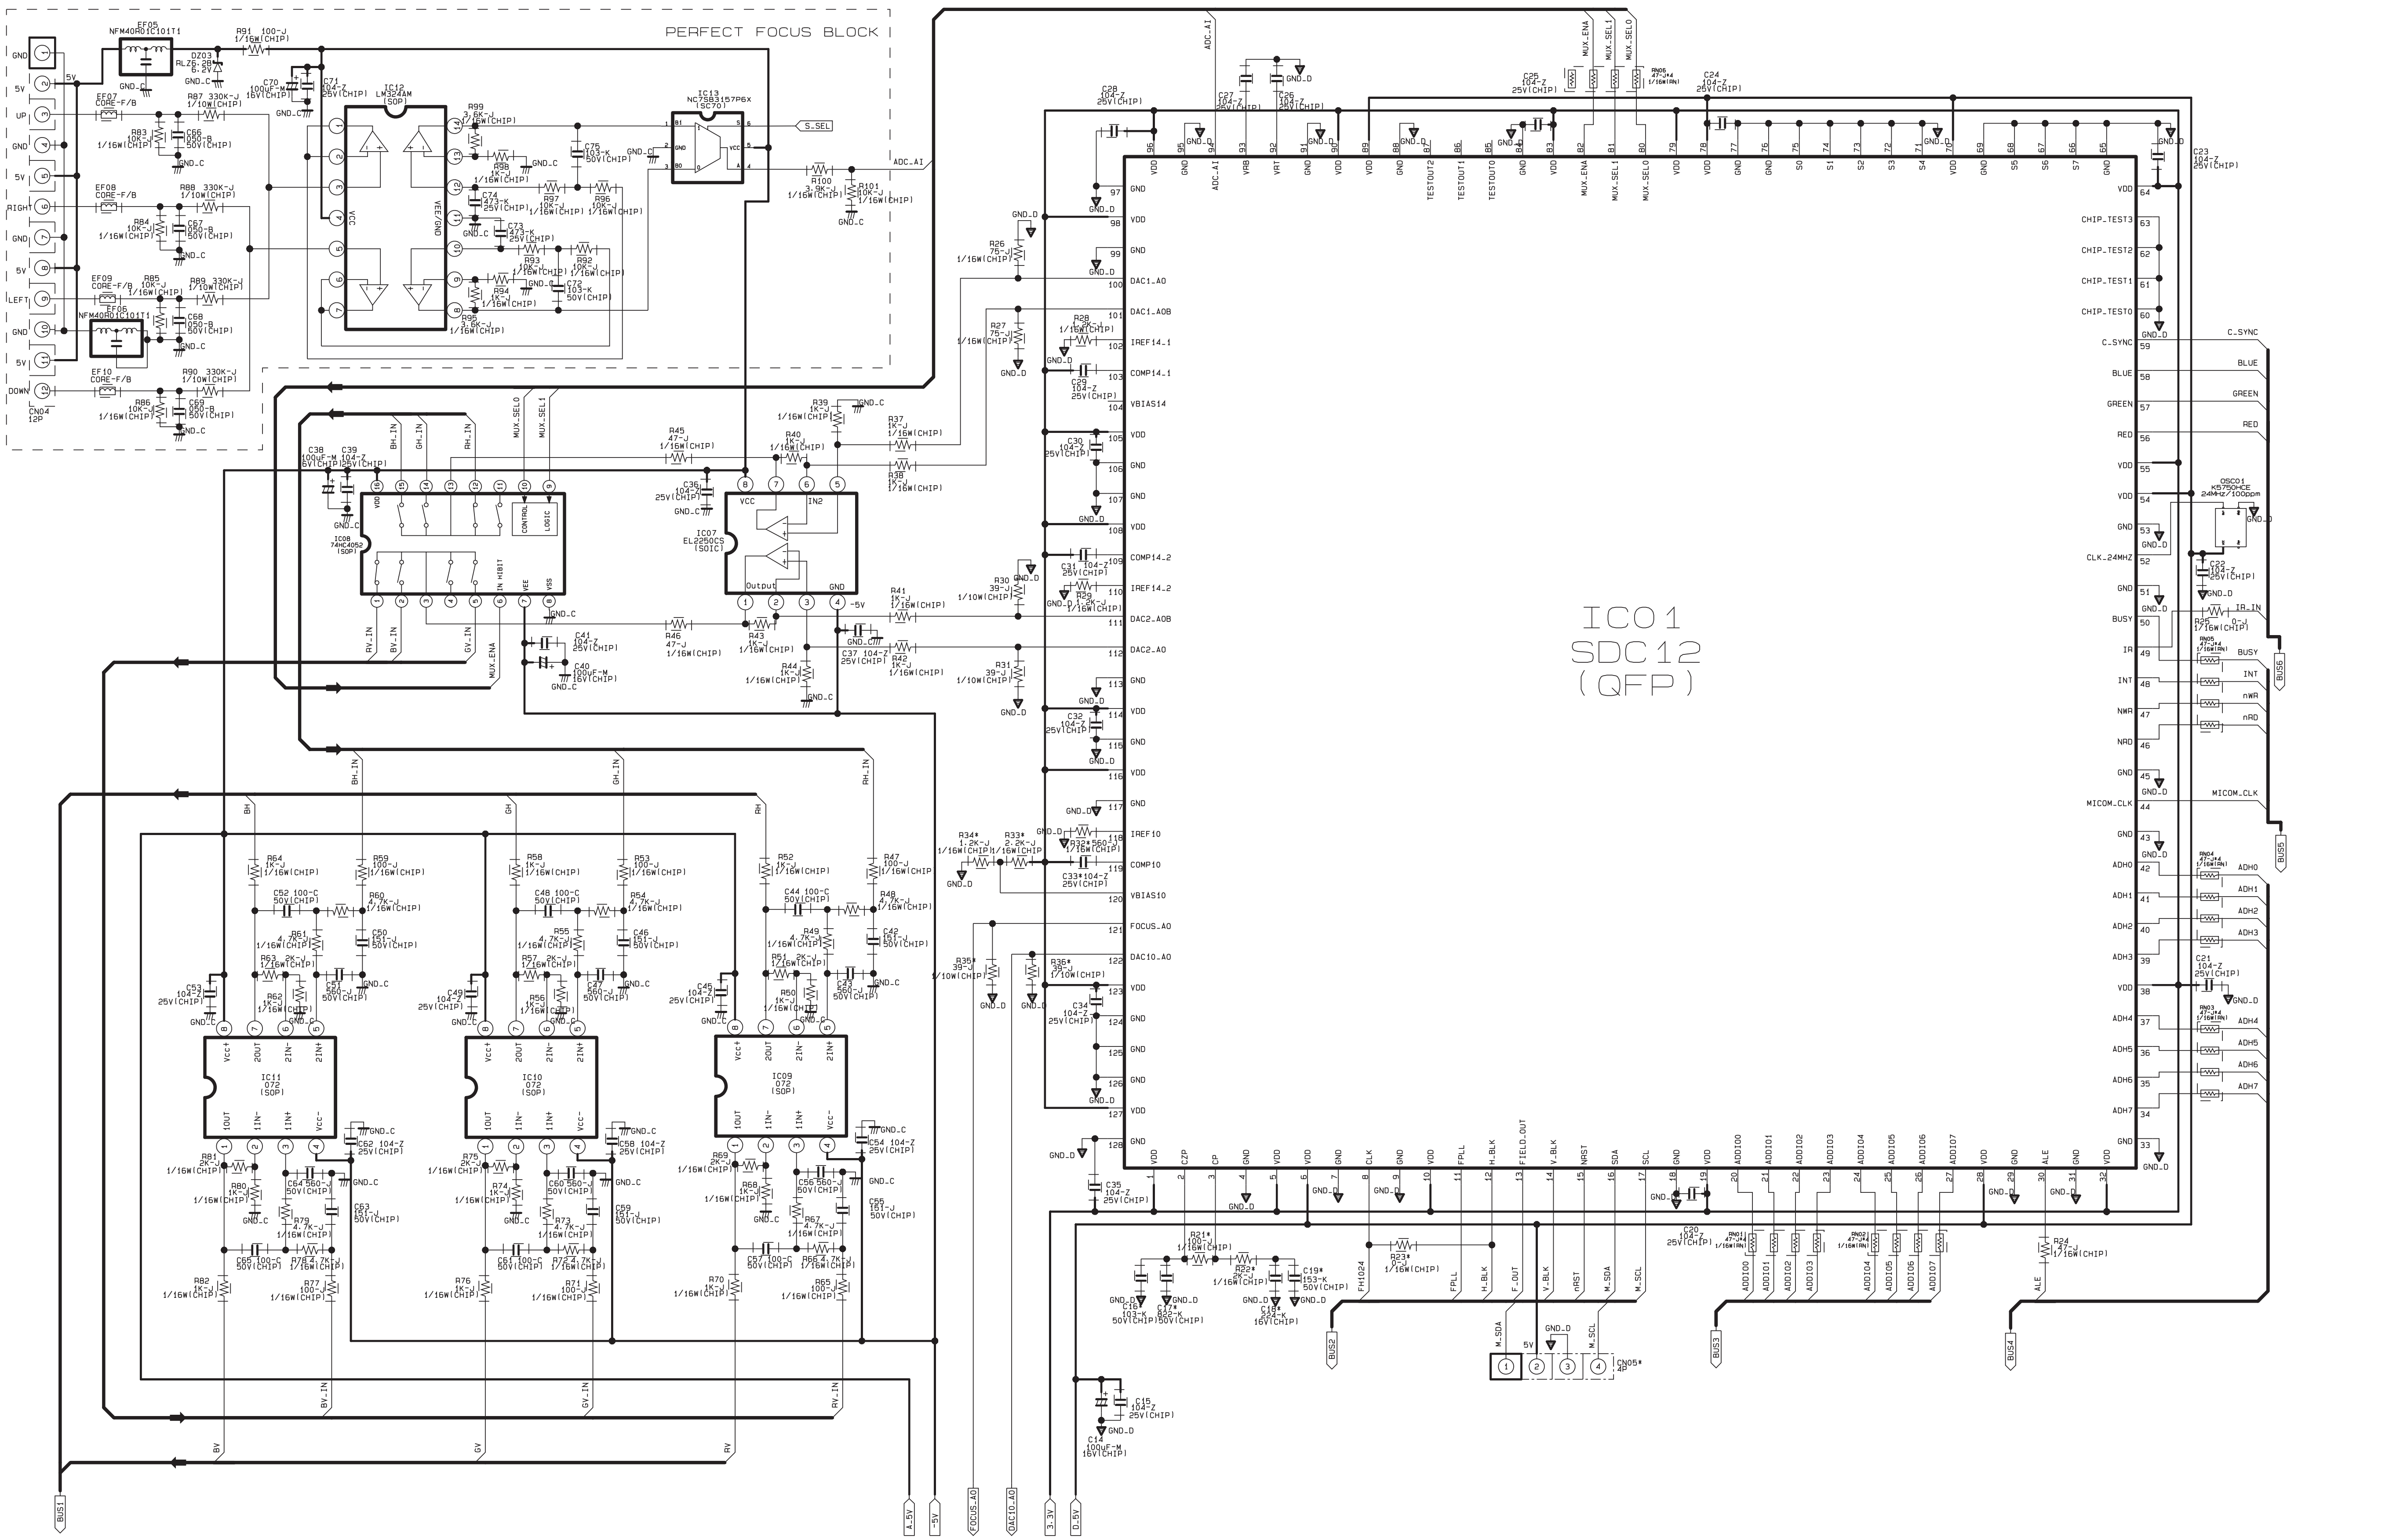


10-18 CONVERGENCE (SDC12 - 2)


	1H	2H	3H
R123	X	0Ohm 2007-000070	0Ohm 2007-000070
R124	47KOhm 2007-000097	X	X
R125	2.7KOhm 2007-000518	12KOhm 2007-000355	12KOhm 2007-000355
R128	3.3KOhm 2007-000082	1.5KOhm 2007-000123	1KOhm 2007-000078

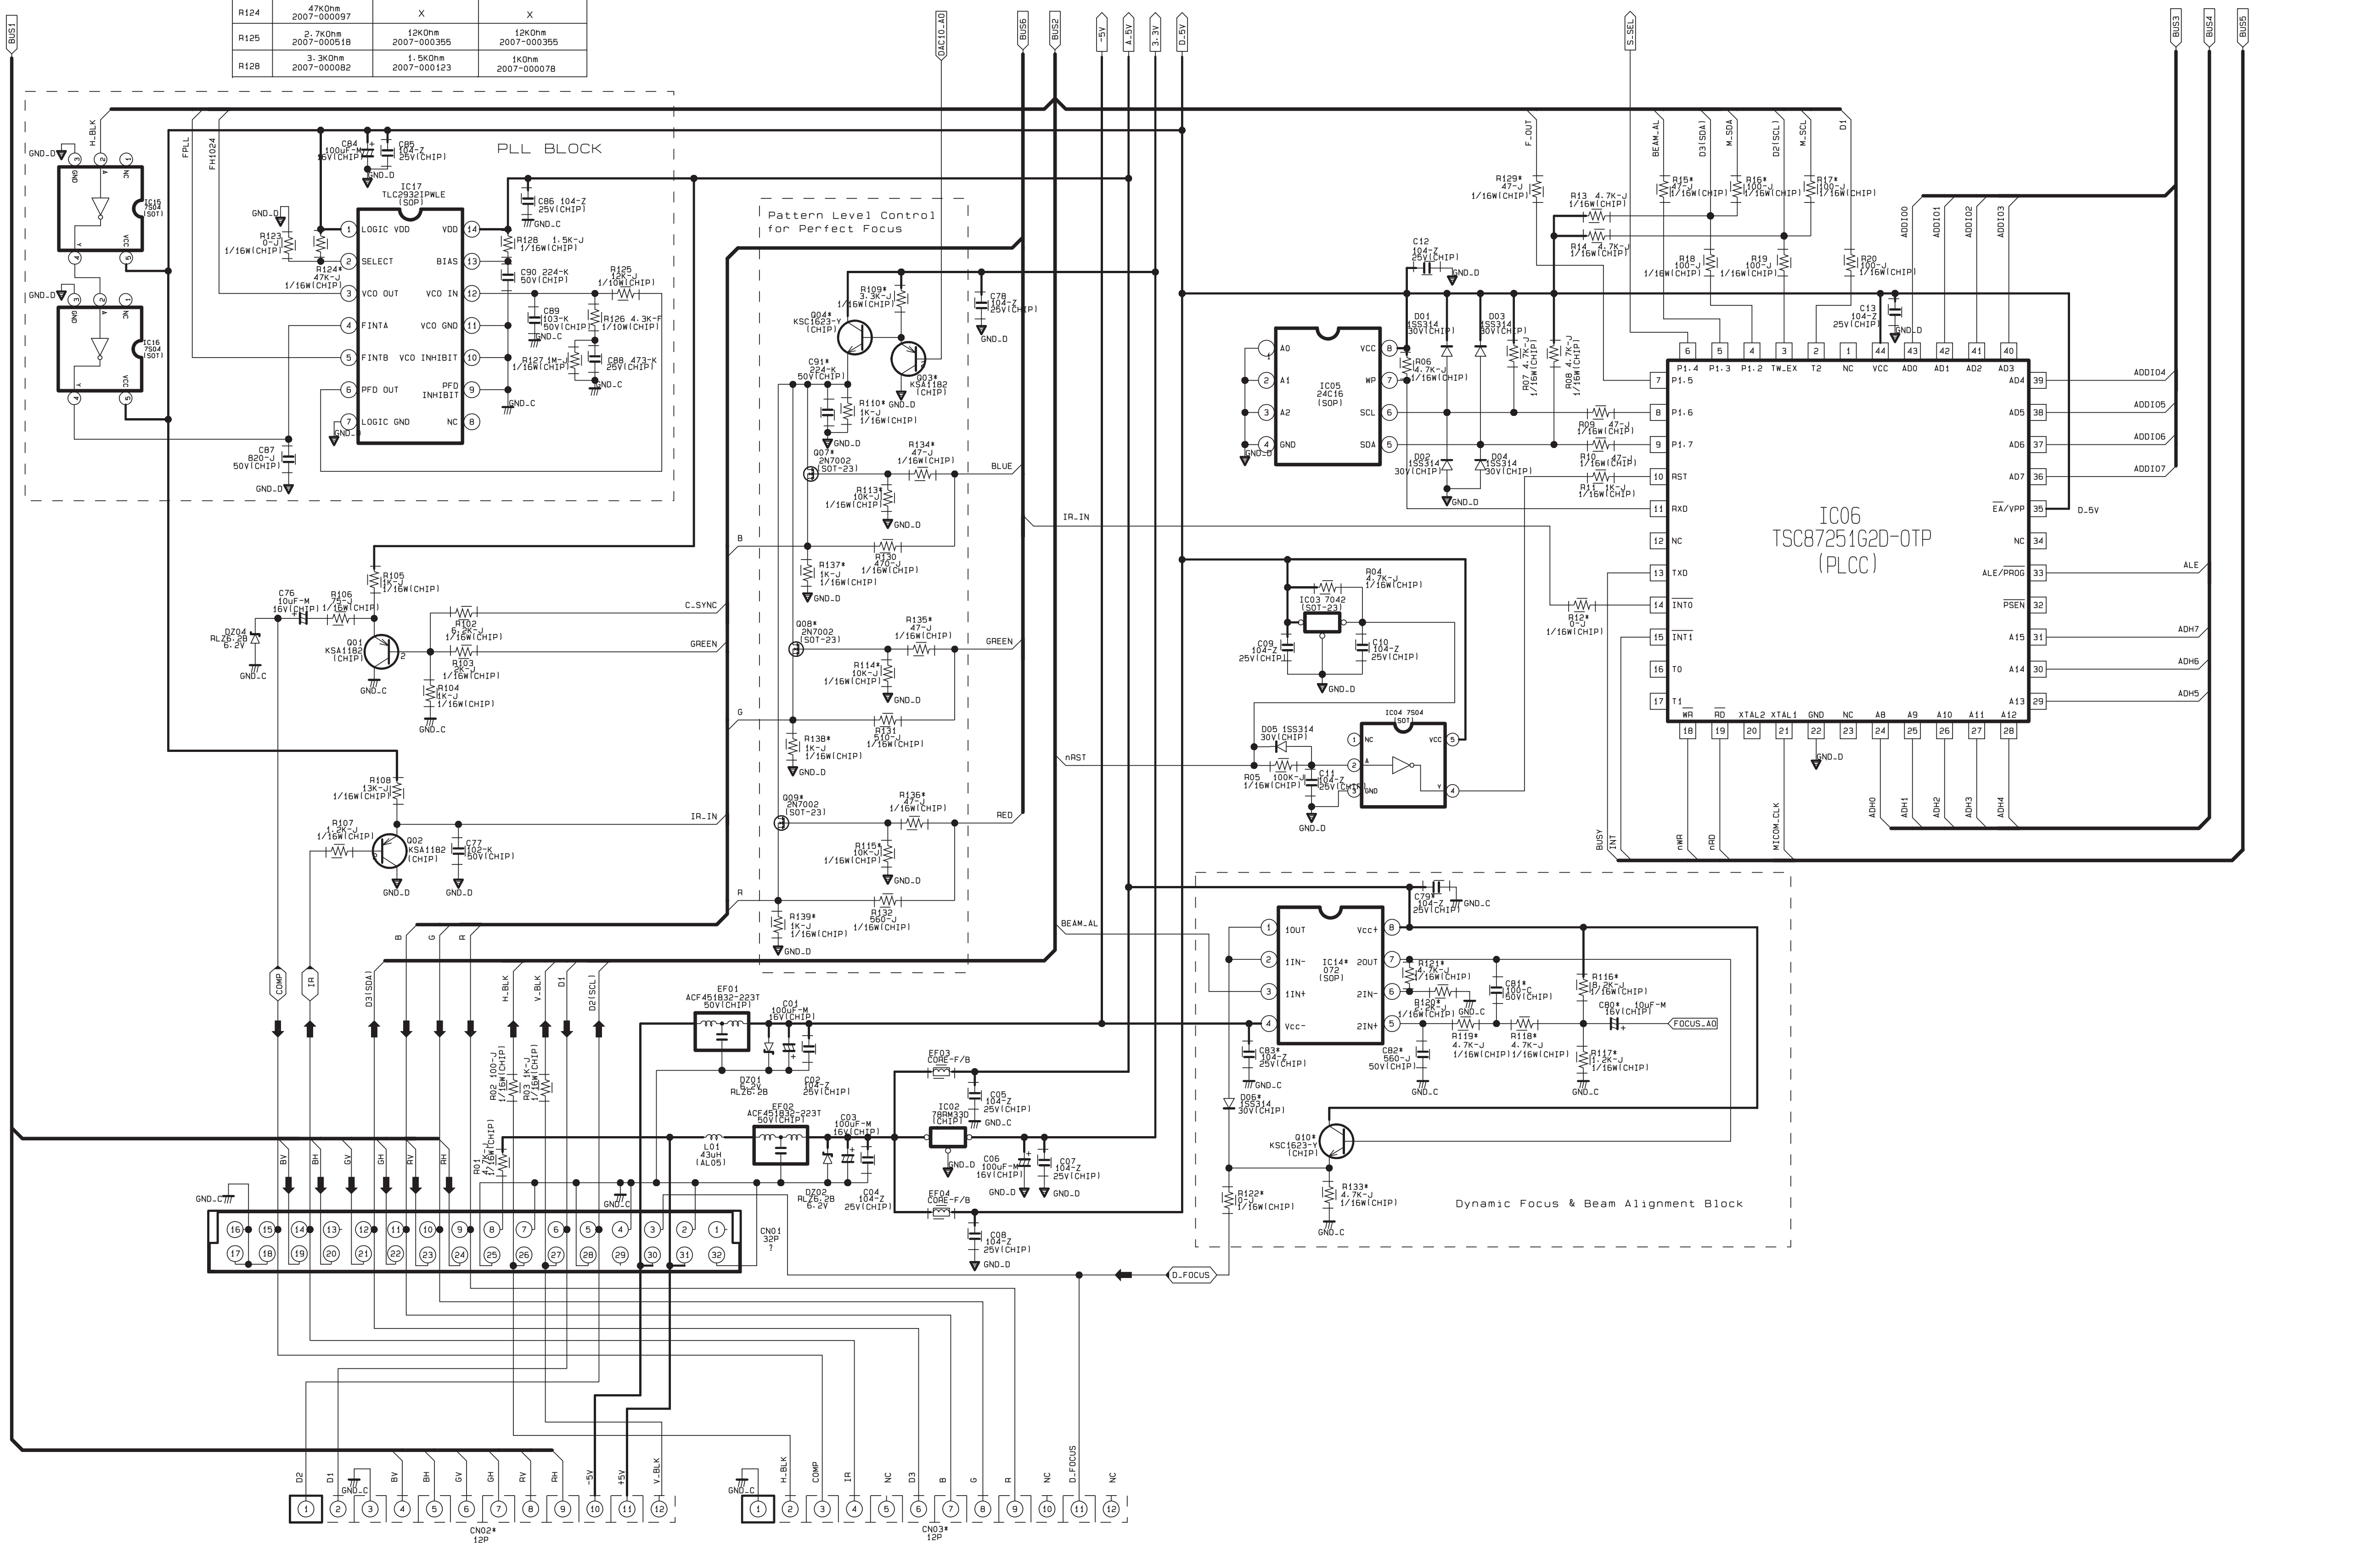

10-19 CAPTION

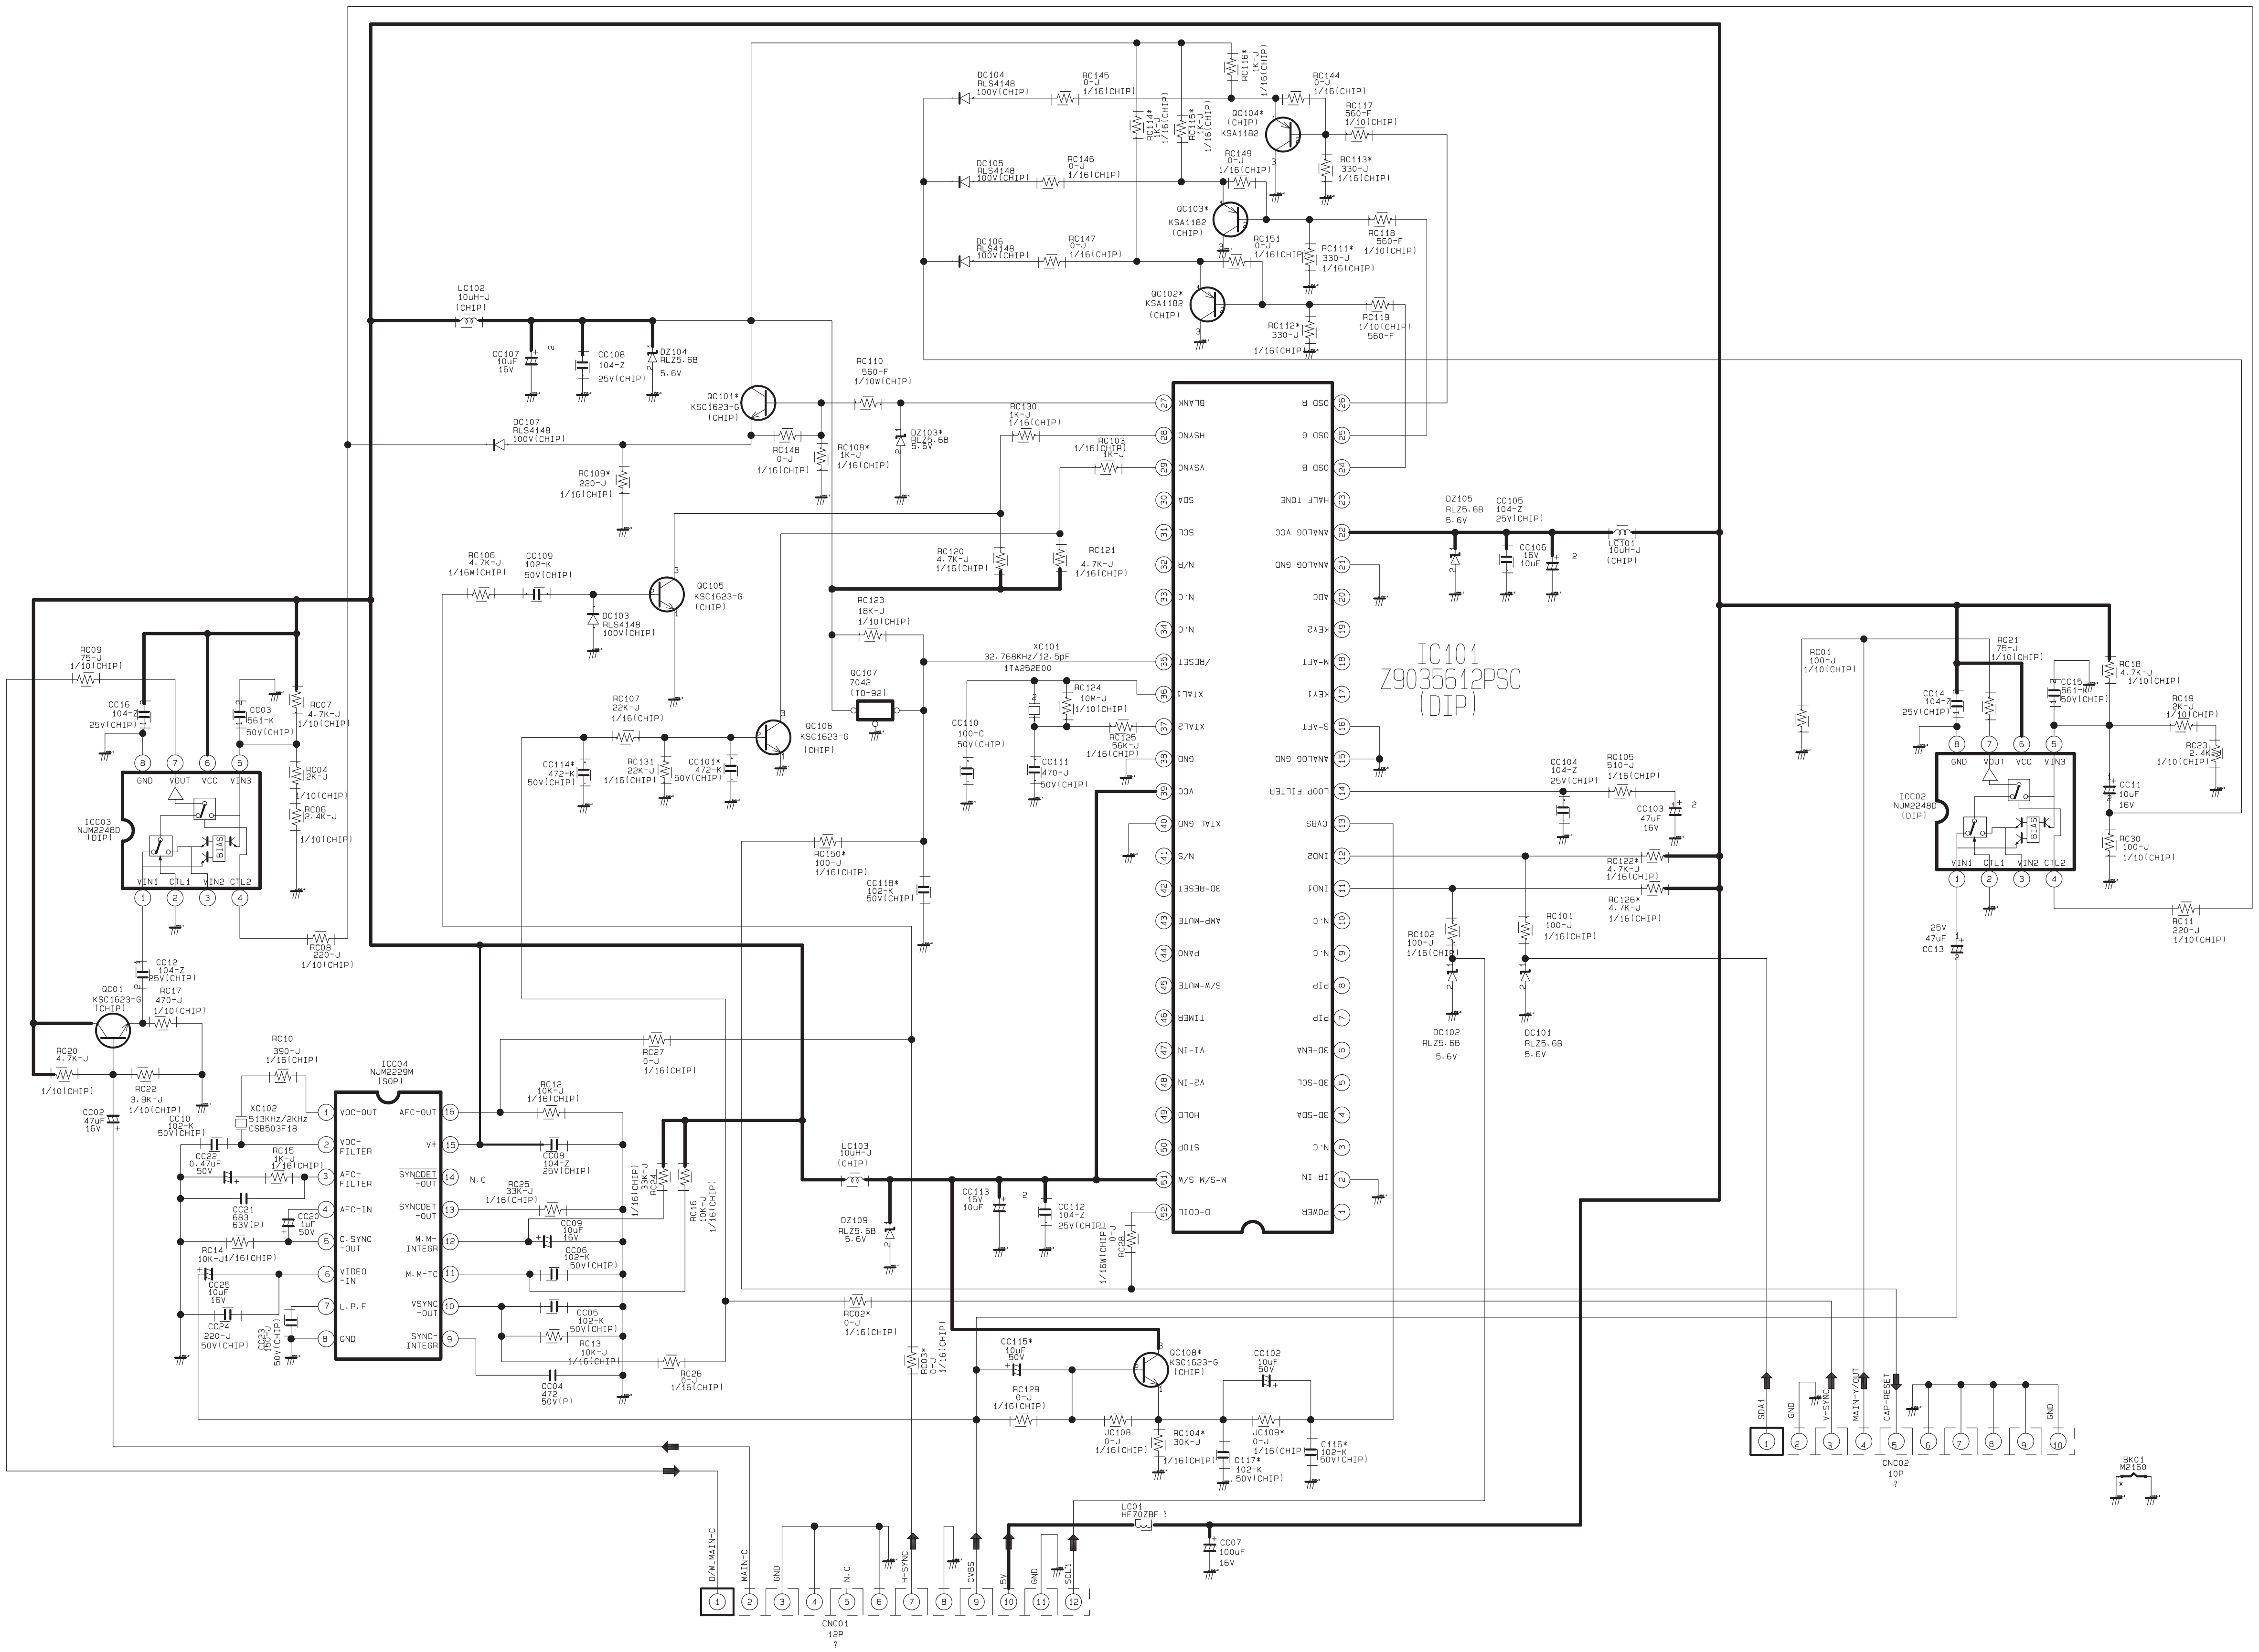


10-20 AV FRONT

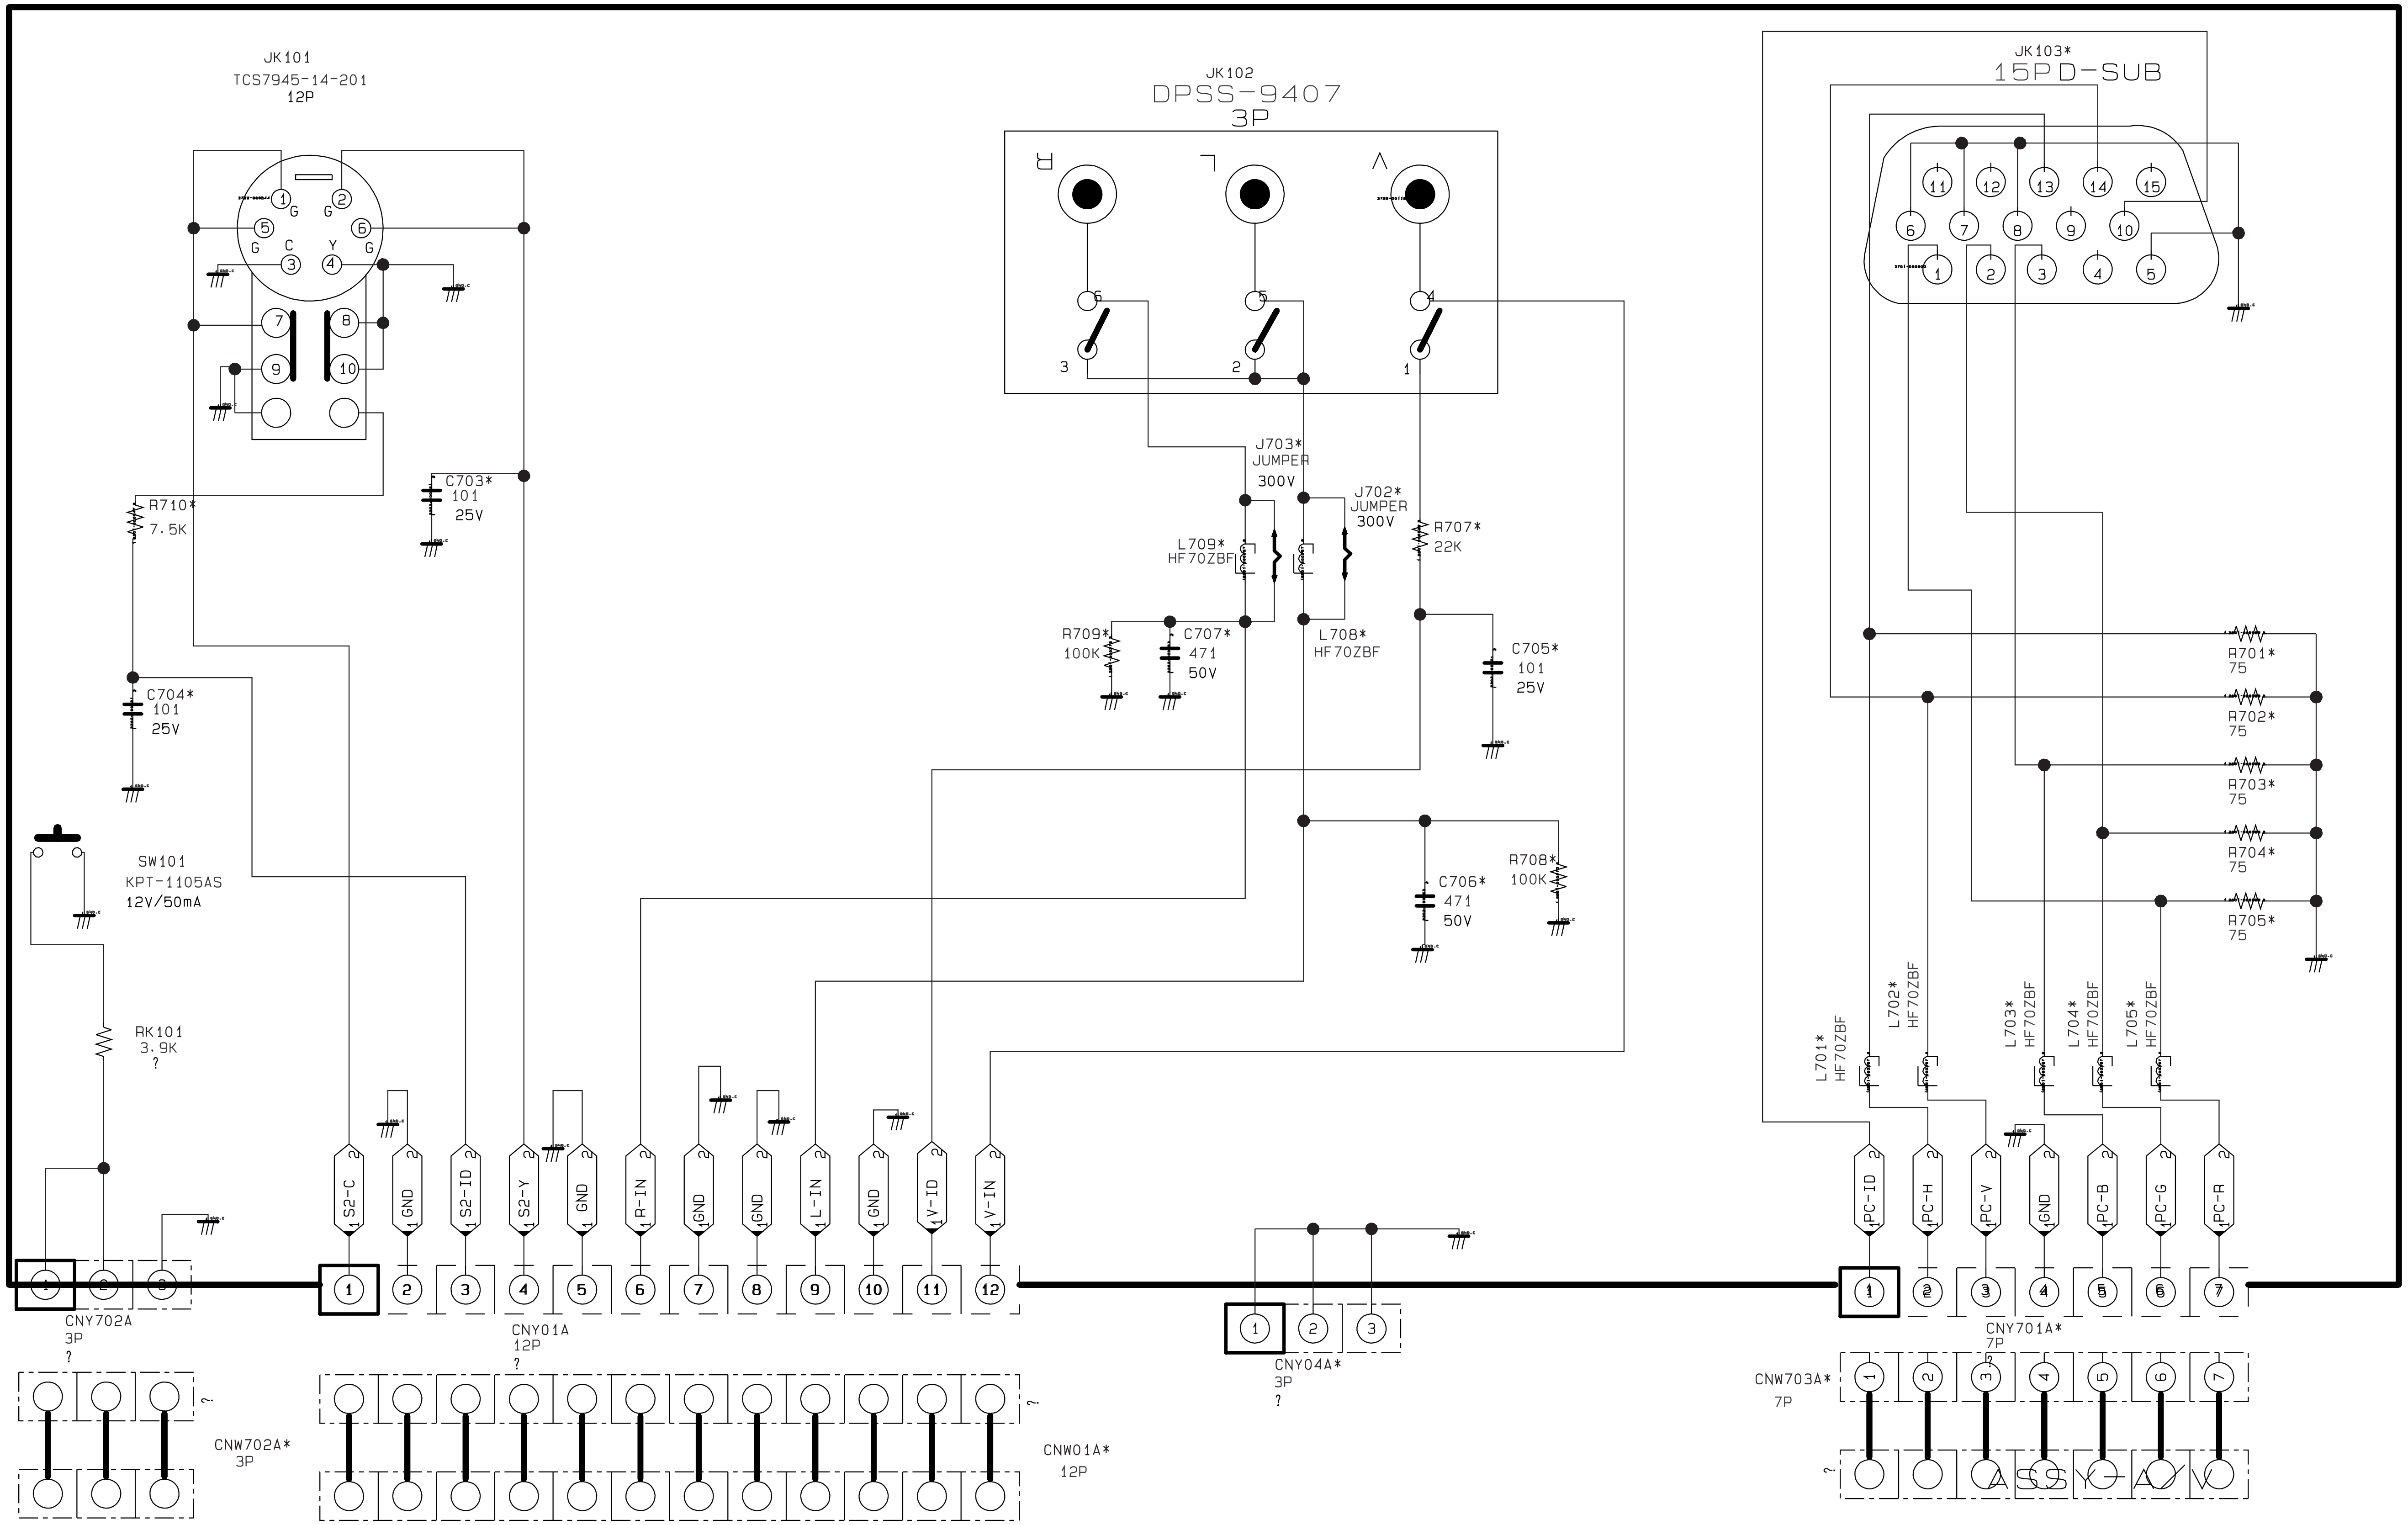


10-21 CONTROL, VM


CONTROL

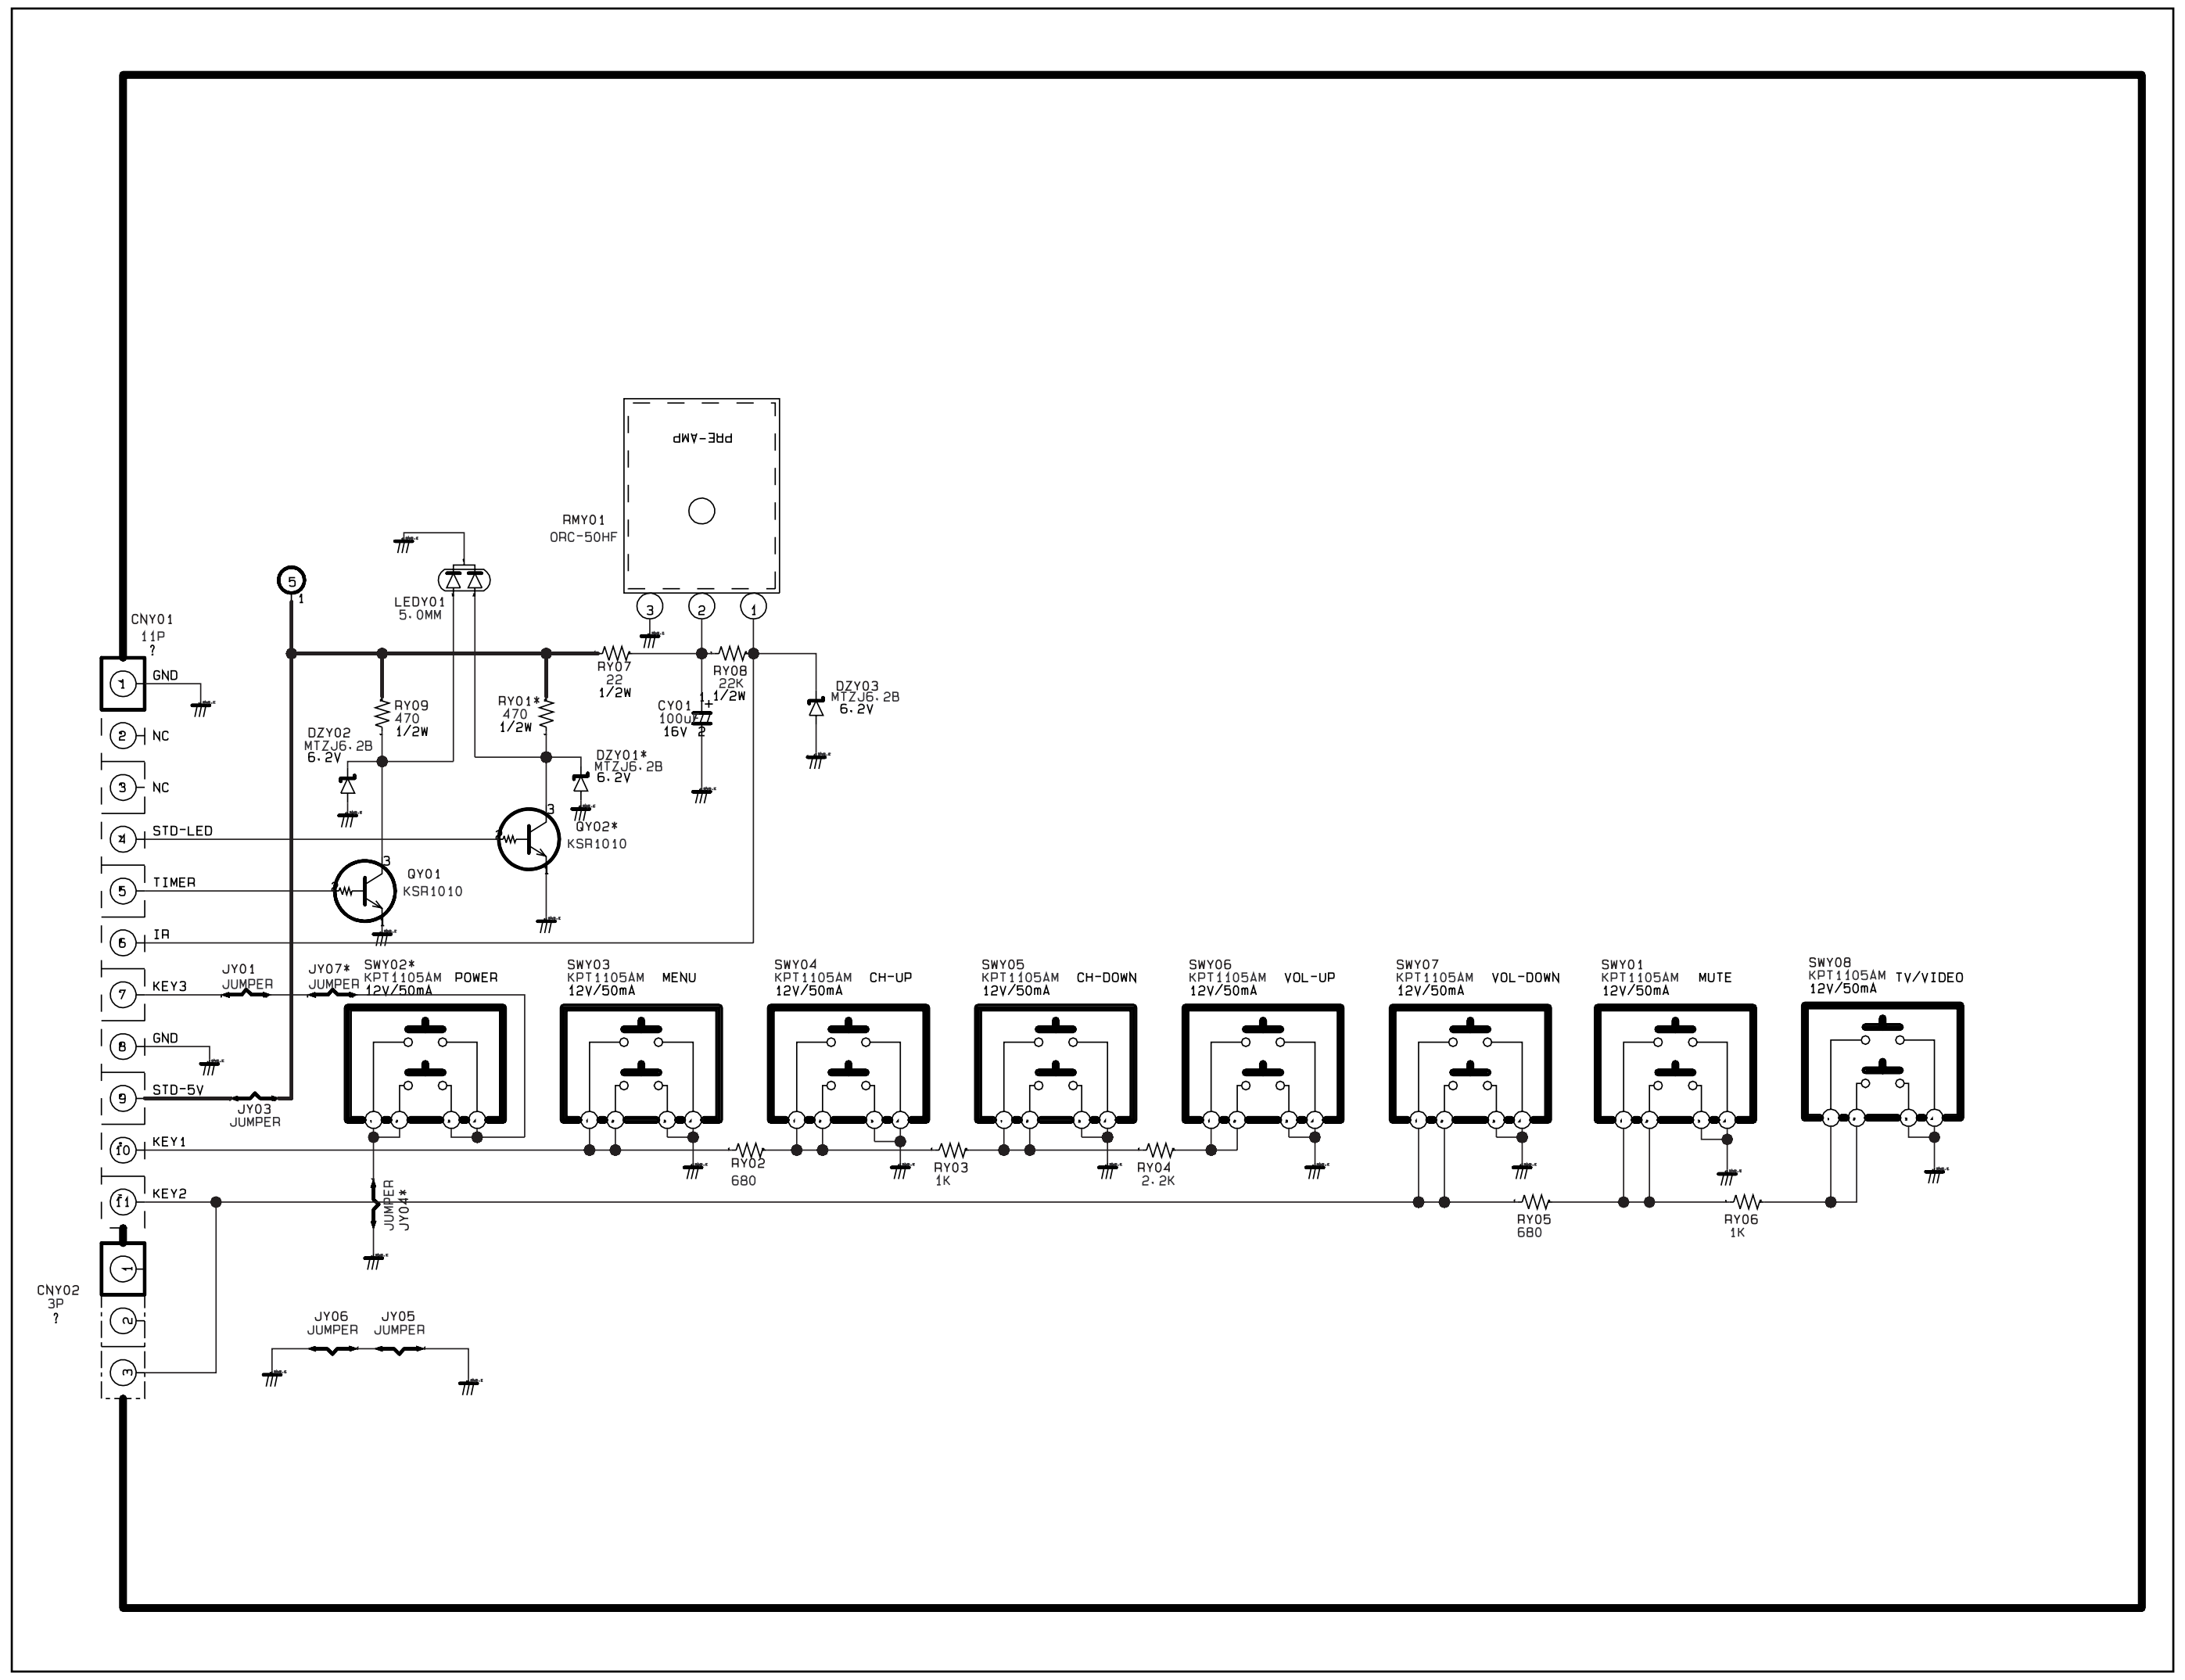


VM

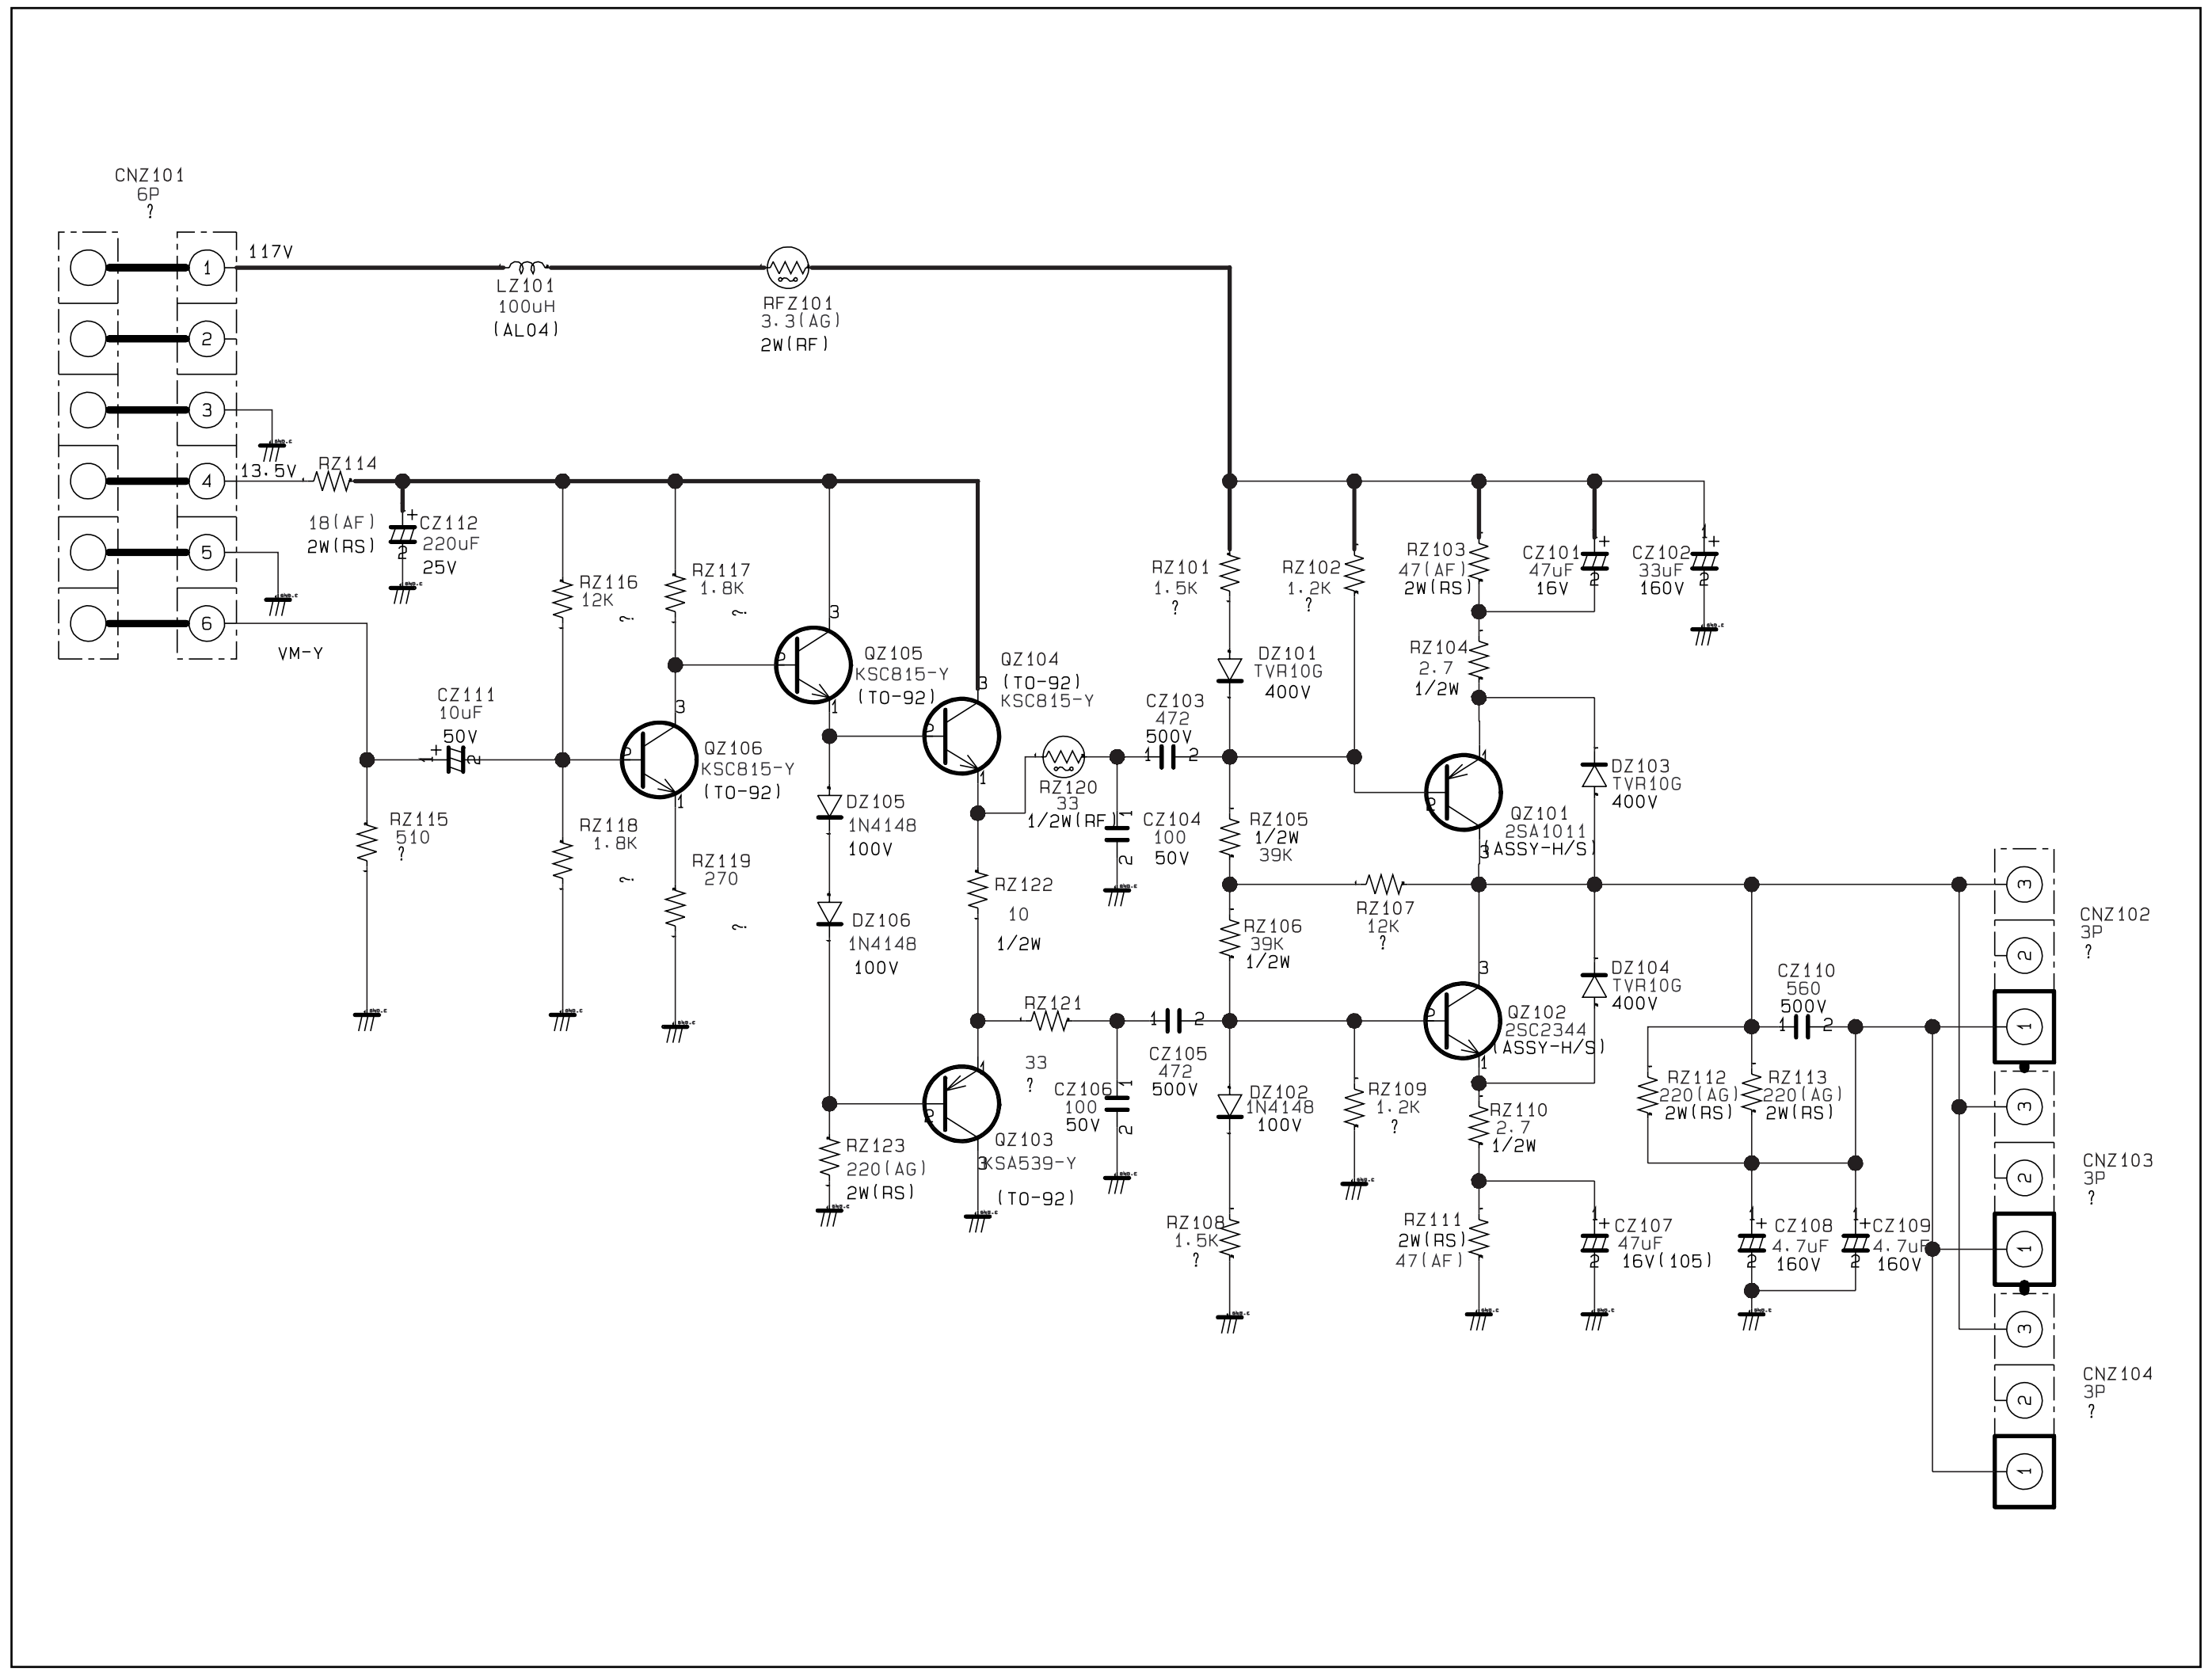


10-22 DW 1

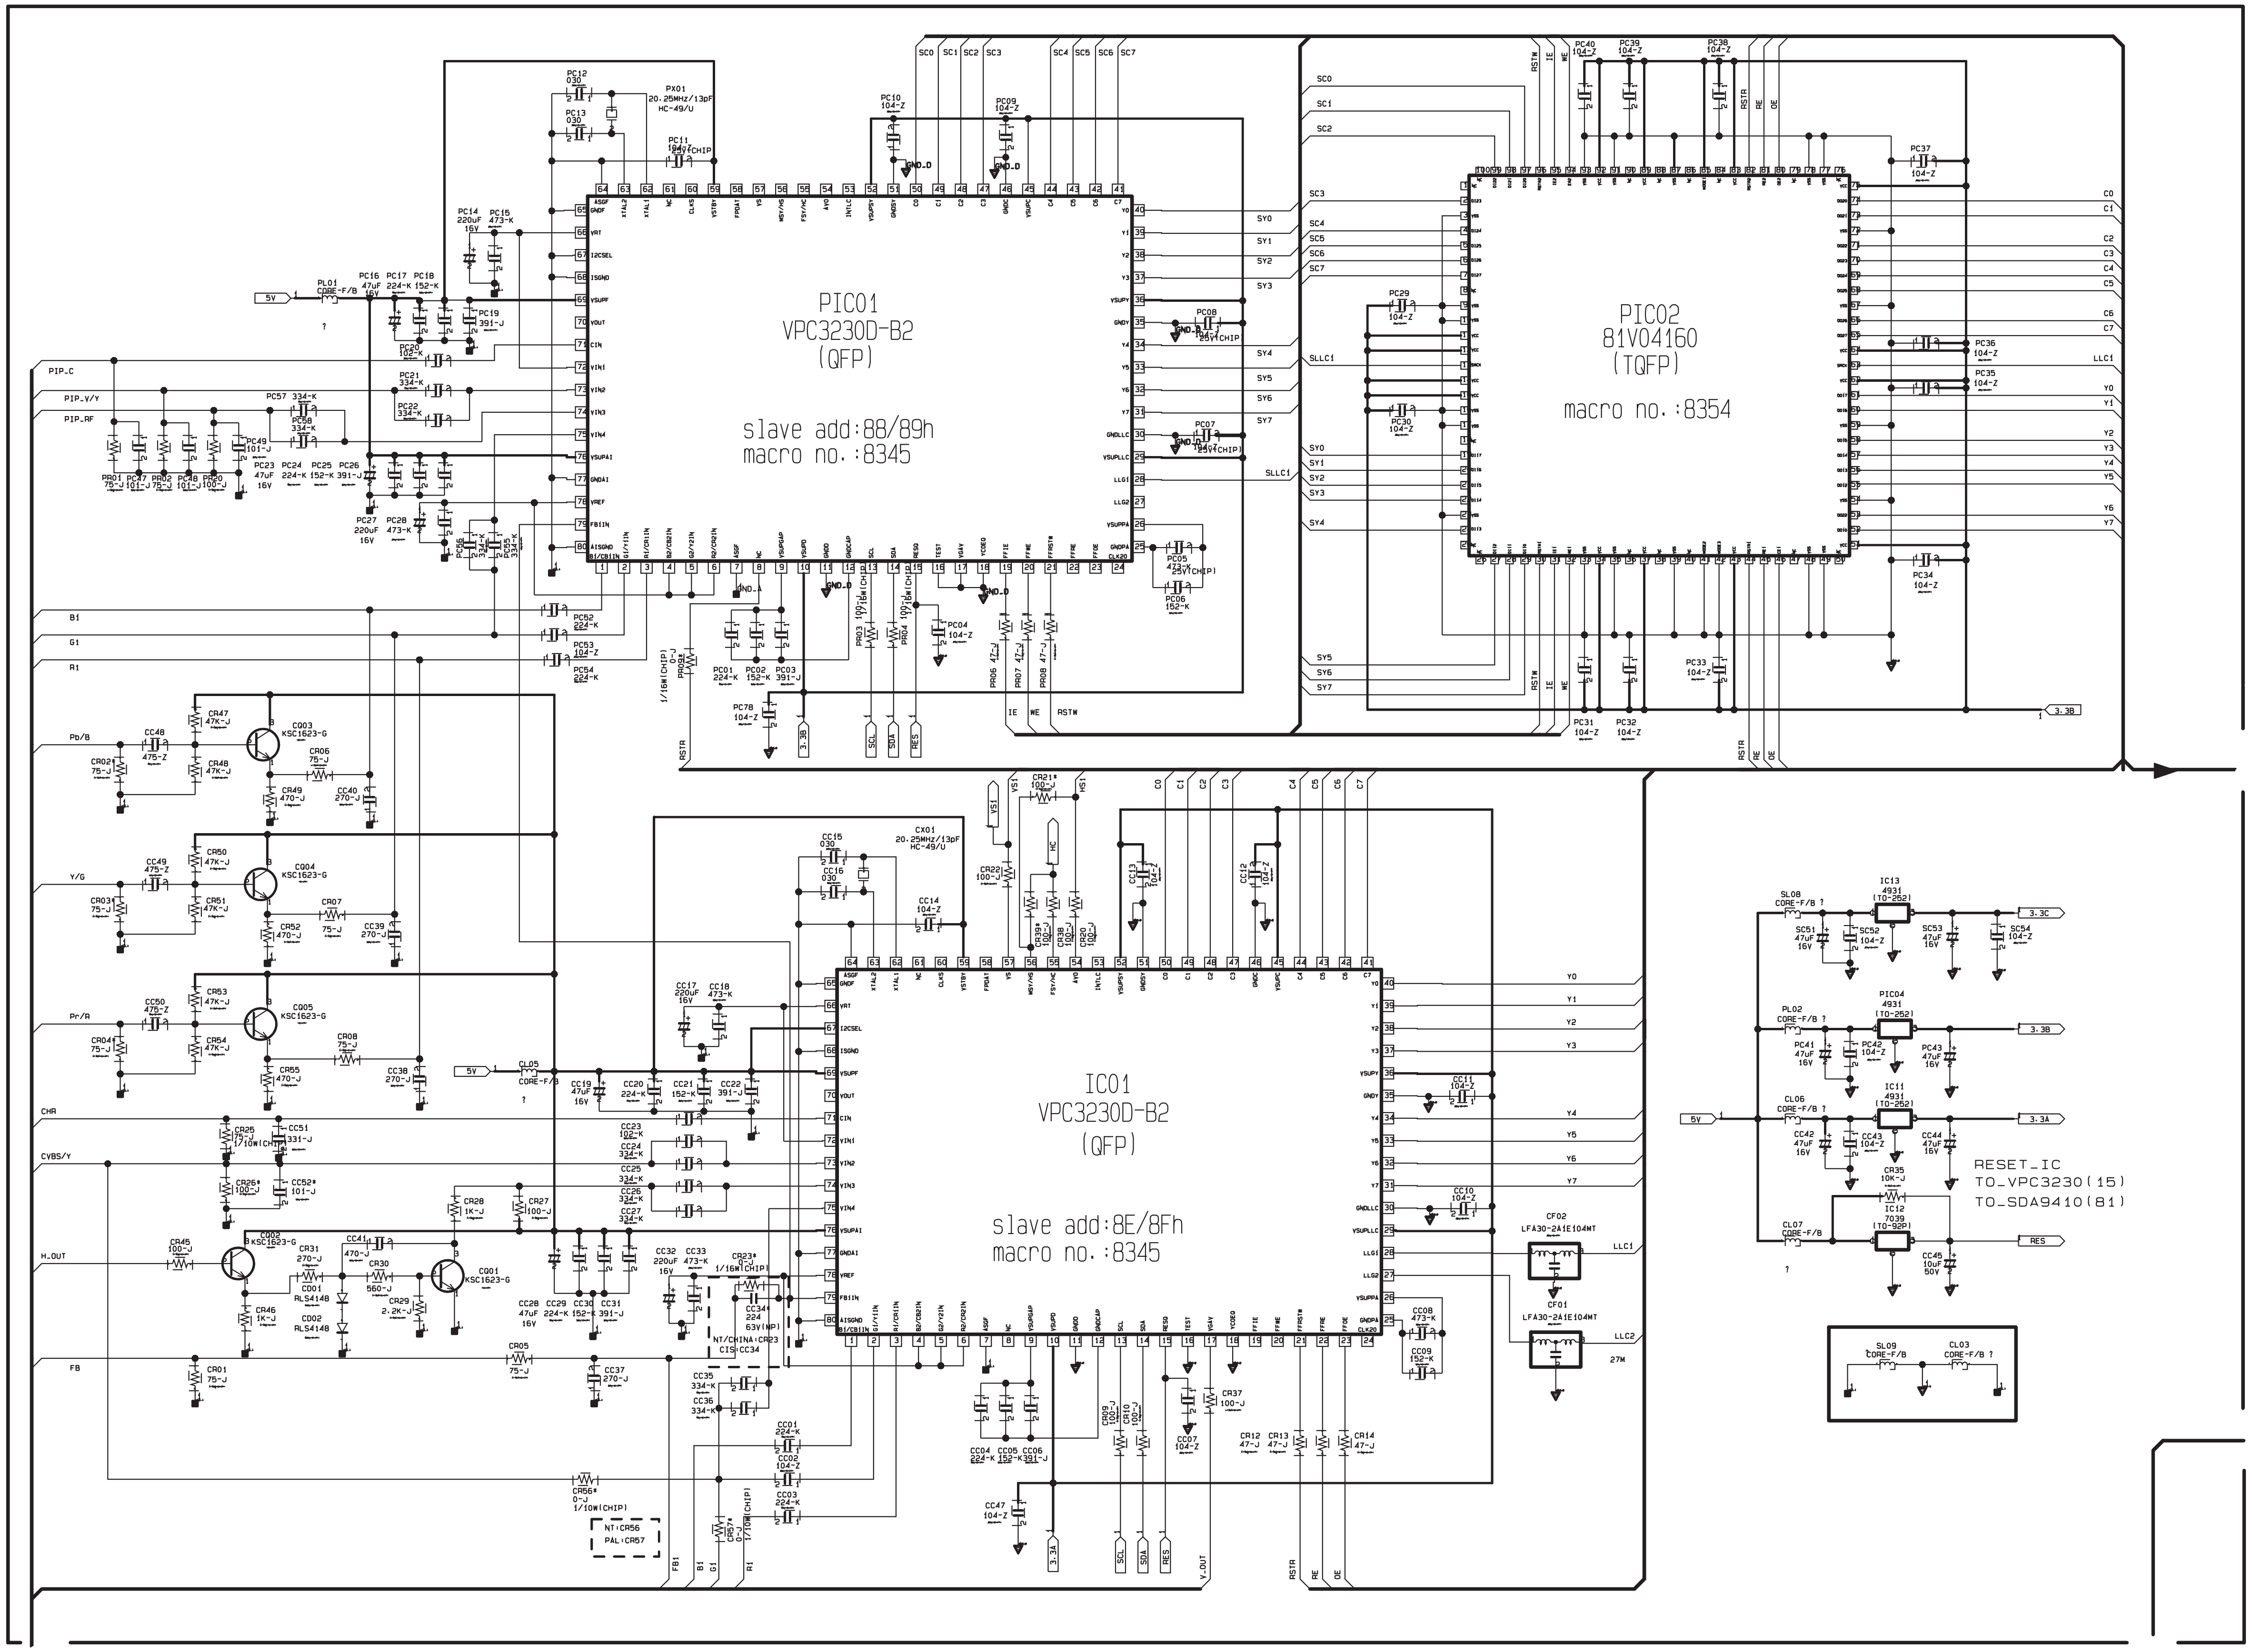
PIC01
VPC3230D-B2
(QFP)
slave add:88/89h
macro no.:8345
PIC02
81V04160
(TQFP)
macro no.:8354
IC01
VPC3230D-B2
(QFP)
slave add:8E/8Fh
macro no.:8345
RESET_IC
TO_VPC3230(15)
TO_SDA9410(81)

10-23 DW 2

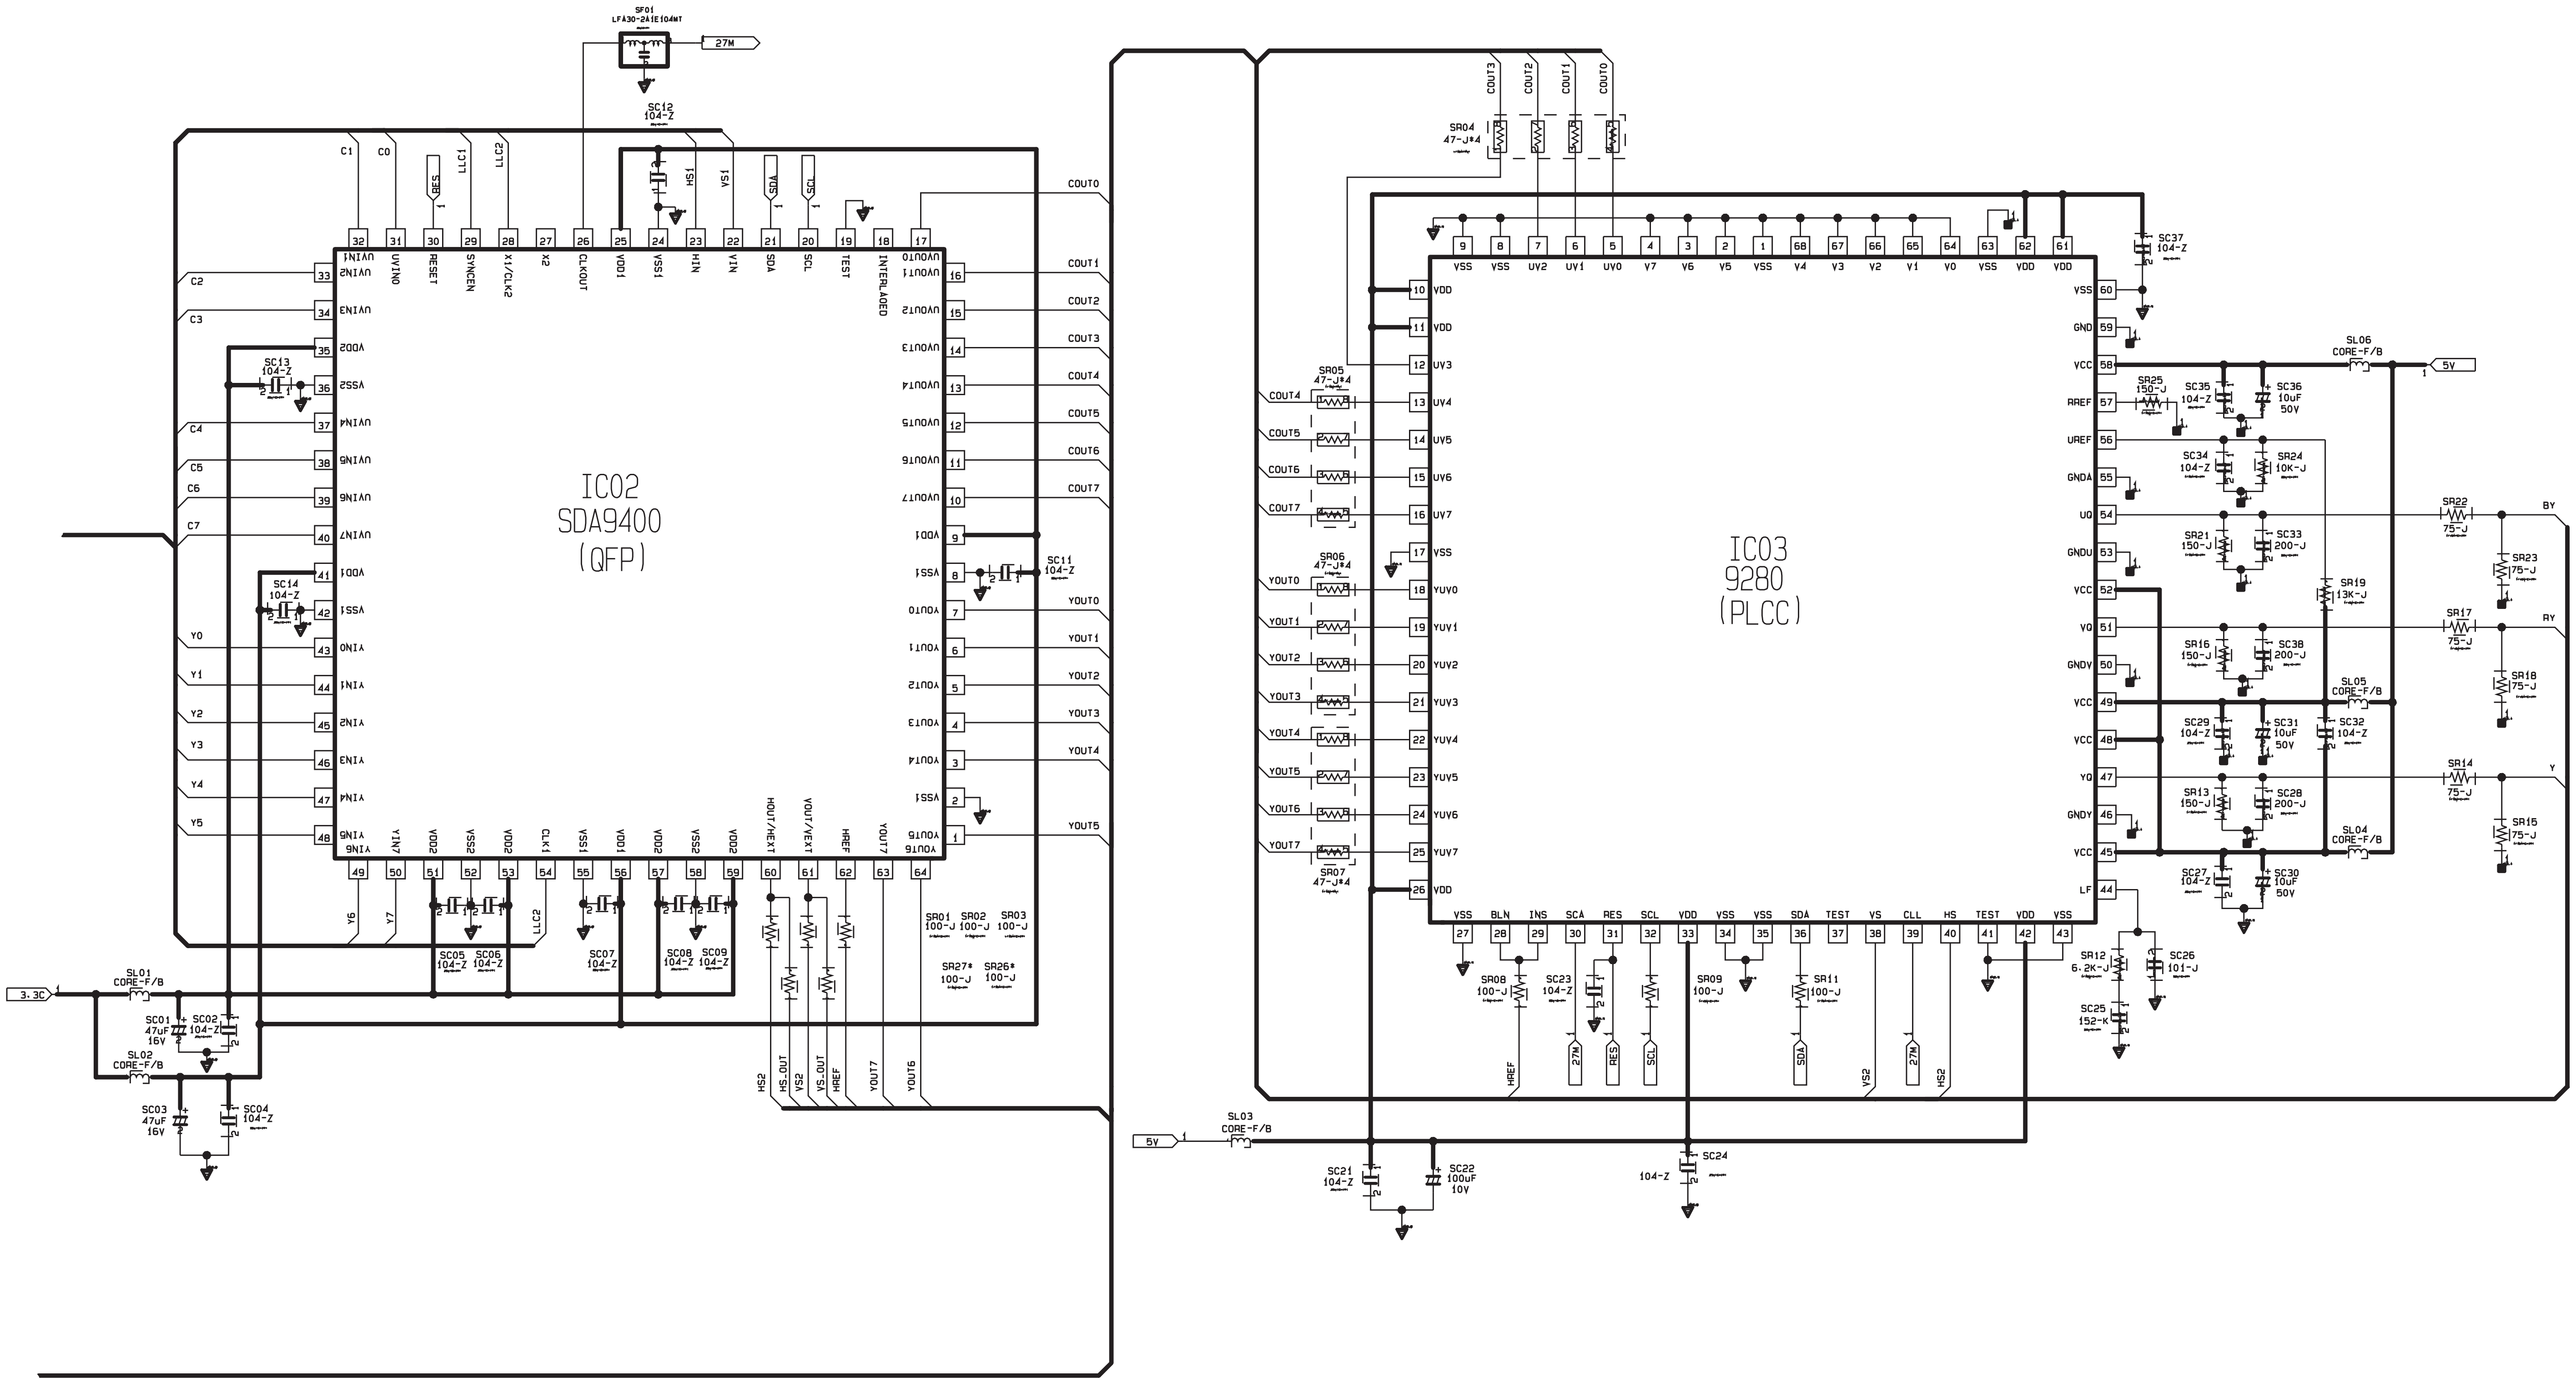


10-24 DW 3

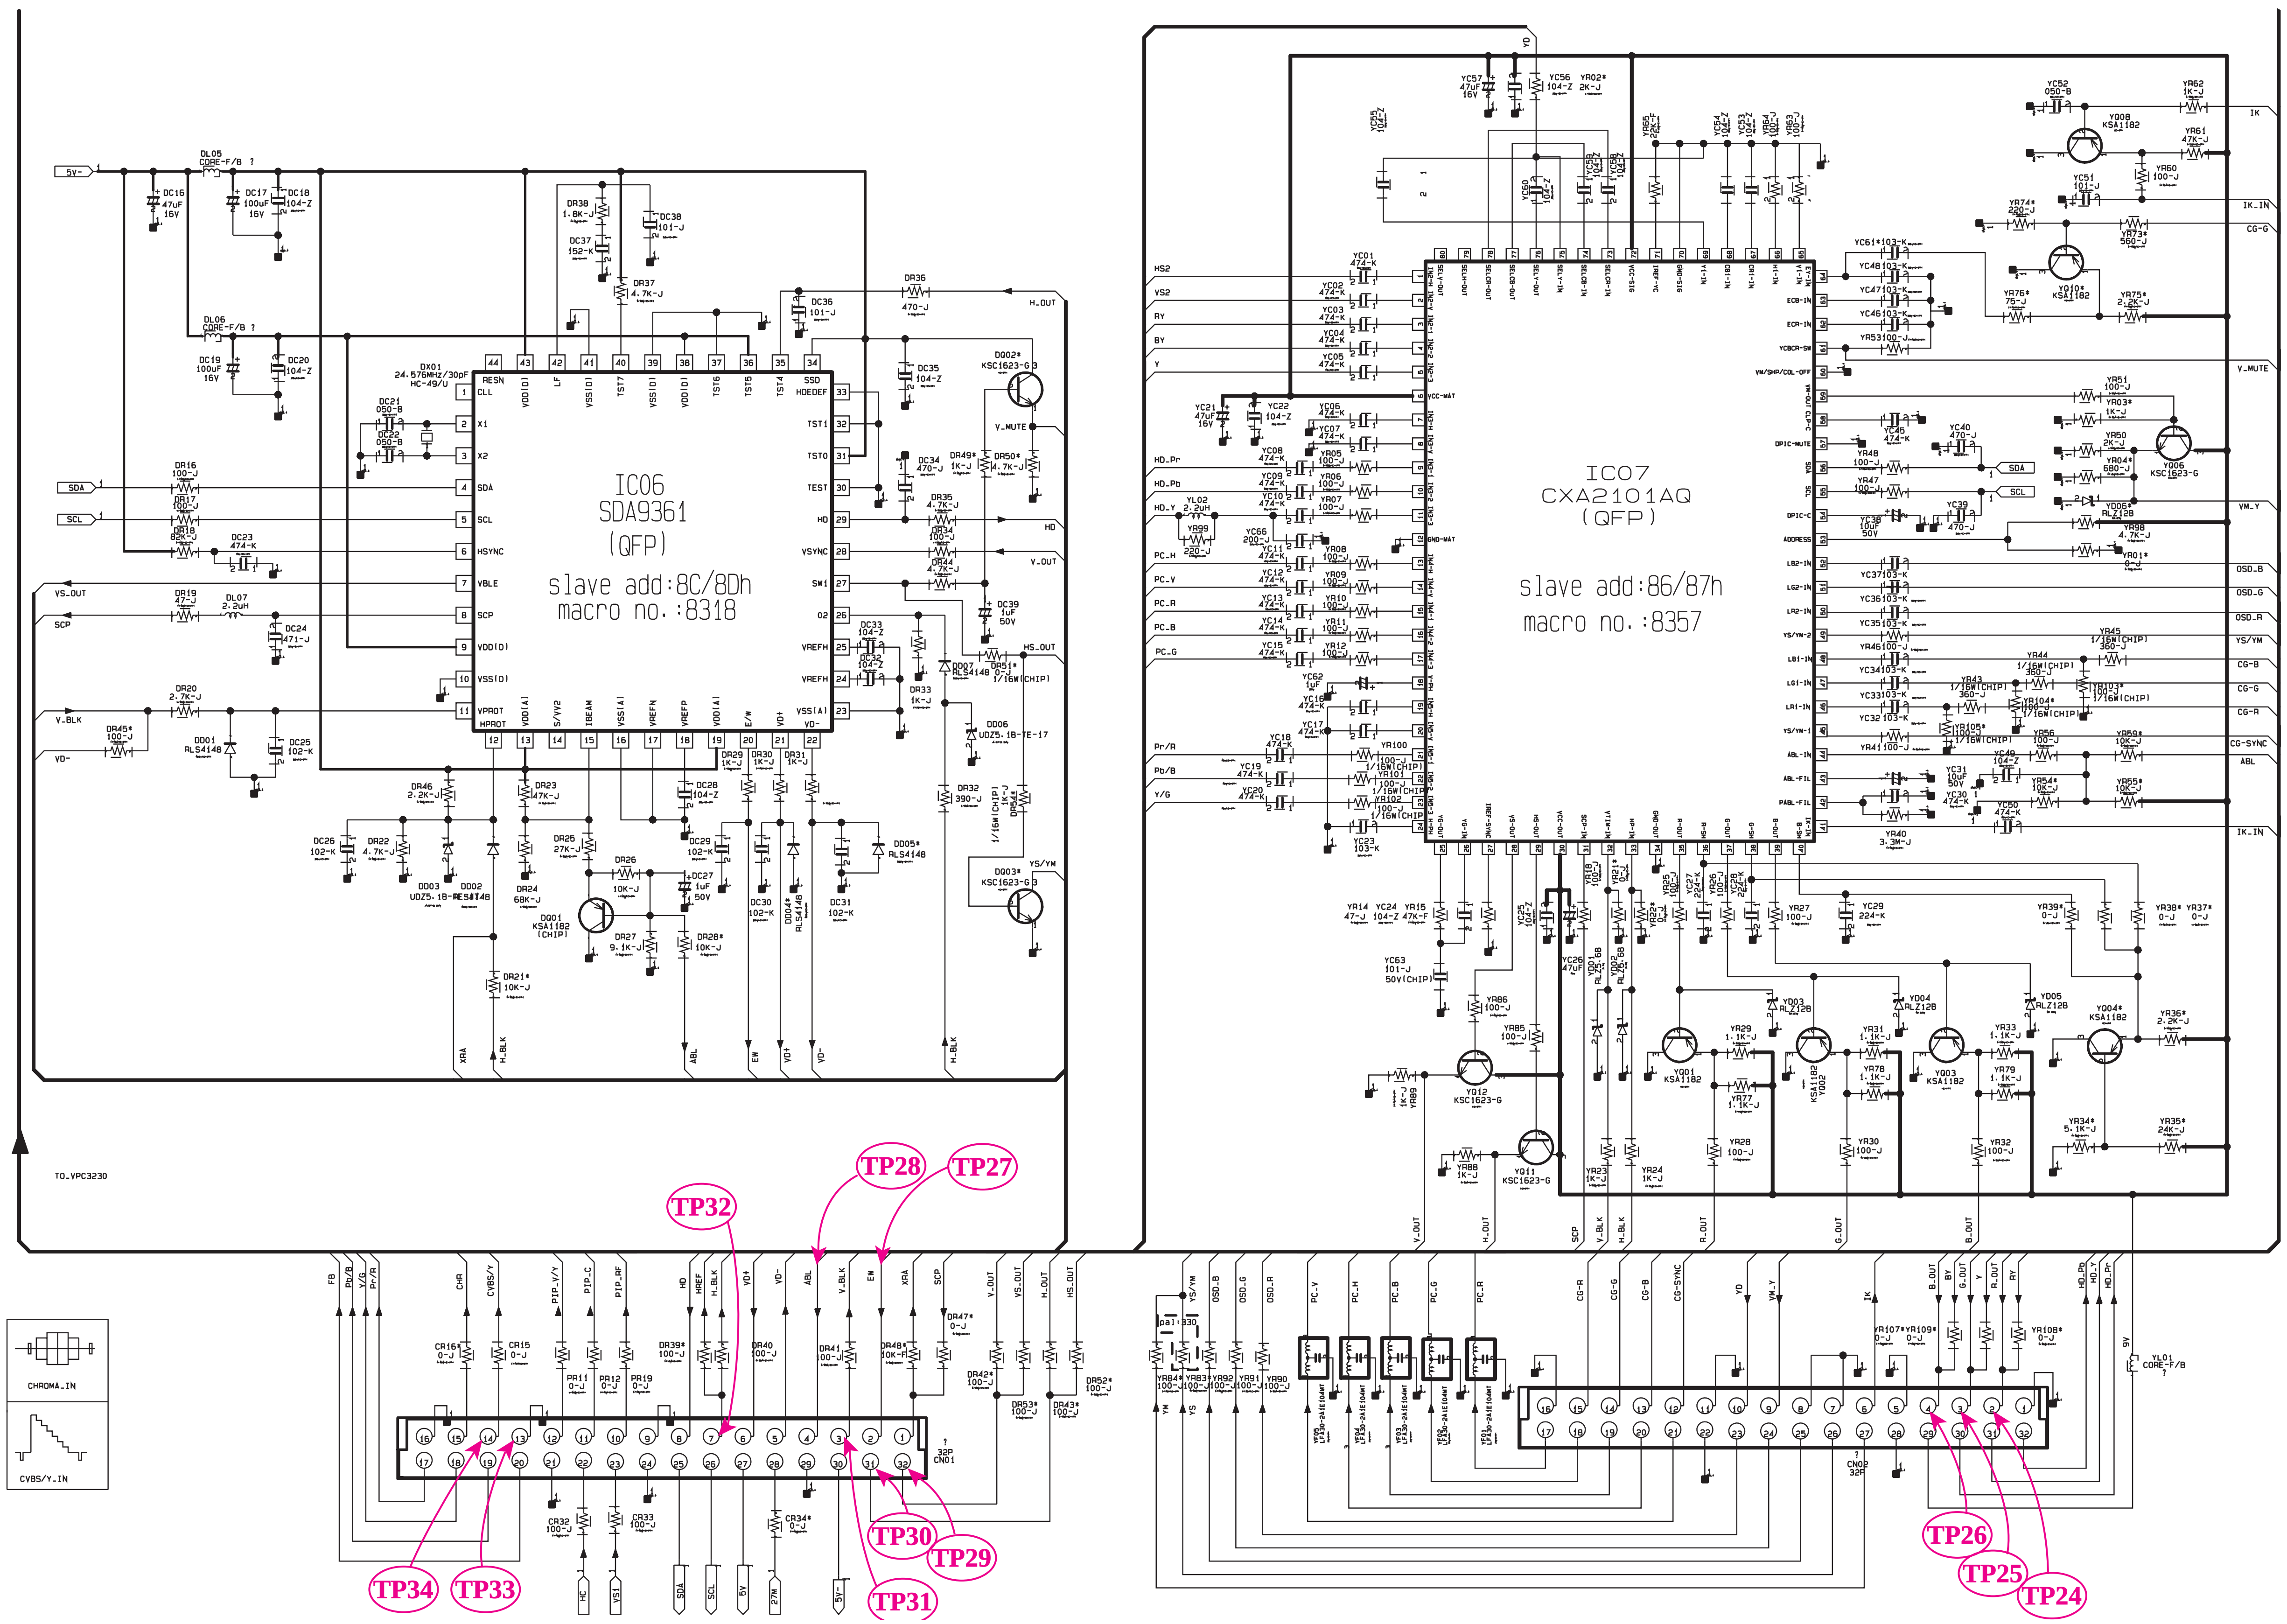

IC06
SDA9361
(QFP)
slave add:8C/8Dh
macro no.:8318
IC07
CXA2101AQ
(QFP)
slave add:86/87h
macro no.:8357
TP24
TP25
TP26
TP27
TP28
TP29
TP30
TP31
TP32
TP33
TP34
TO_VPC3230
CHROMA_IN
CVBS/Y_IN

10-24-1 DW 3 WAVEFORMS


TP24




TP25




TP26




TP27




TP28




TP29




TP30




TP31



TP32



TP33



TP34

